

Documentation | EN

EP92x4-002x

4/4-channel power distribution for EtherCAT Box modules



Table of contents

1 Foreword	5
1.1 Notes on the documentation	5
1.2 Safety instructions	6
1.3 Documentation issue status	7
2 EtherCAT Box - Introduction	9
3 Product overview	11
3.1 EP9214-0023	12
3.2 EP9214-0024	13
3.3 EP9224-0023	14
3.4 EP9224-0024	16
3.5 Technical data	18
3.6 Scope of supply	21
3.7 Process image	22
4 Mounting and cabling	26
4.1 Installation	26
4.1.1 Dimensions EP92x4-0023	26
4.1.2 Dimensions EP92x4-0024	27
4.1.3 Fixing	28
4.1.4 Tightening torques for plug connectors	28
4.2 Functional earth (FE)	29
4.3 Supply voltage input and downstream connection	30
4.3.1 Connection	31
4.3.2 Status LEDs	32
4.3.3 Conductor losses	32
4.4 Supply voltage outputs	33
4.4.1 Connection	33
4.4.2 Status LEDs and status bits	34
4.4.3 Power cable conductor losses M8	36
4.5 EtherCAT	37
4.5.1 Connectors	37
4.5.2 Status LEDs	38
4.5.3 Cables	38
4.6 Monitoring and reset contacts	39
4.7 UL Requirements	40
4.8 Disposal	41
5 Commissioning and configuration	42
5.1 Integration in TwinCAT	42
5.2 Operation with or without EtherCAT master	42
5.3 Protective functions	44
5.3.1 Overload protection	45
5.3.2 Overcurrent protection for sum currents	48
5.3.3 Undervoltage protection	49
5.3.4 Overtemperature protection	49

5.3.5	Warning and error messages.....	50
5.4	Diagnostic functions, EP9224-002x only.....	51
5.4.1	Data logger.....	51
5.4.2	Peak value detector	54
5.5	Switch output voltages	57
5.6	Restore the delivery state	59
6	CoE parameters.....	60
6.1	Objects for parameterization	63
6.2	Standard objects	74
6.3	Profile-specific objects	93
7	Appendix.....	101
7.1	General operating conditions	101
7.2	Accessories	102
7.3	Version identification of EtherCAT devices	103
7.3.1	General notes on marking.....	103
7.3.2	Version identification of IP67 modules	104
7.3.3	Beckhoff Identification Code (BIC).....	105
7.3.4	Electronic access to the BIC (eBIC).....	107
7.4	Support and Service.....	109

1 Foreword

1.1 Notes on the documentation

Intended audience

This description is only intended for the use of trained specialists in control and automation engineering who are familiar with the applicable national standards.

It is essential that the documentation and the following notes and explanations are followed when installing and commissioning these components.

The qualified personnel is obliged to always use the currently valid documentation.

The responsible staff must ensure that the application or use of the products described satisfy all the requirements for safety, including all the relevant laws, regulations, guidelines and standards.

Disclaimer

The documentation has been prepared with care. The products described are, however, constantly under development.

We reserve the right to revise and change the documentation at any time and without prior announcement.

No claims for the modification of products that have already been supplied may be made on the basis of the data, diagrams and descriptions in this documentation.

Trademarks

Beckhoff®, ATRO®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, MX-System®, Safety over EtherCAT®, TC/BSD®, TwinCAT®, TwinCAT/BSD®, TwinSAFE®, XFC®, XPlanar® and XTS® are registered trademarks of and licensed by Beckhoff Automation GmbH.

Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.



EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

Copyright

© Beckhoff Automation GmbH & Co. KG, Germany.

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization are prohibited.

Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Third-party brands

Trademarks of third parties may be used in this documentation. You can find the trademark notices here:

<https://www.beckhoff.com/trademarks>

1.2 Safety instructions

Safety regulations

Please note the following safety instructions and explanations!

Product-specific safety instructions can be found on following pages or in the areas mounting, wiring, commissioning etc.

Exclusion of liability

All the components are supplied in particular hardware and software configurations appropriate for the application. Modifications to hardware or software configurations other than those described in the documentation are not permitted, and nullify the liability of Beckhoff Automation GmbH & Co. KG.

Personnel qualification

This description is only intended for trained specialists in control, automation and drive engineering who are familiar with the applicable national standards.

Signal words

The signal words used in the documentation are classified below. In order to prevent injury and damage to persons and property, read and follow the safety and warning notices.

Personal injury warnings

DANGER

Hazard with high risk of death or serious injury.

WARNING

Hazard with medium risk of death or serious injury.

CAUTION

There is a low-risk hazard that could result in medium or minor injury.

Warning of damage to property or environment

NOTICE

The environment, equipment, or data may be damaged.

Information on handling the product



This information includes, for example:
recommendations for action, assistance or further information on the product.

1.3 Documentation issue status

Version	Comment
3.4	<ul style="list-style-type: none"> Undervoltage threshold values added Accessories updated
3.3	<ul style="list-style-type: none"> Chapter "Undervoltage protection" updated. CoE parameters updated.
3.2	<ul style="list-style-type: none"> Technical data updated
3.1	<ul style="list-style-type: none"> UL added
3.0	<ul style="list-style-type: none"> EP9214-0024 and EP9224-0024 added Completely revised version
2.7	<ul style="list-style-type: none"> English translation updated Structure update
2.6	<ul style="list-style-type: none"> English translation updated Structure update
2.5	<ul style="list-style-type: none"> Front page updated Scope of delivery added Technical data updated Structure update
2.4	<ul style="list-style-type: none"> Safety instructions adapted to IEC 82079-1. EP9224-0023: specification of the measured values added. Structure update
2.3.1	<ul style="list-style-type: none"> Nut torques for connectors updated Chapter <i>Switch-off behavior</i> updated
2.3.0	<ul style="list-style-type: none"> Cabling added
2.2.0	<ul style="list-style-type: none"> Operation with or without EtherCAT master updated
2.1.0	<ul style="list-style-type: none"> Power Connection updated
2.0.0	<ul style="list-style-type: none"> Migration Chapter <i>Mounting and Cabling</i> updated Chapter <i>Tightening torques for connectors</i> extended Chapter <i>Switch-off behavior</i> updated Object descriptions updated
1.1.0	<ul style="list-style-type: none"> EP9224-0023 added
1.0.0	<ul style="list-style-type: none"> First release
0.1	<ul style="list-style-type: none"> Preliminary version (internal only)

Firmware and hardware versions

This documentation refers to the firmware and hardware version that was applicable at the time the documentation was written.

The module features are continuously improved and developed further. Modules having earlier production statuses cannot have the same properties as modules with the latest status. However, existing properties are retained and are not changed, so that older modules can always be replaced with new ones.

The firmware and hardware version (delivery state) can be found in the batch number (D-number) printed on the side of the EtherCAT Box.

Syntax of the batch number (D-number)

D: WW YY FF HH

WW - week of production (calendar week)

YY - year of production

FF - firmware version

HH - hardware version

Example with D no. 29 10 02 01:

29 - week of production 29

10 - year of production 2010

02 - firmware version 02

01 - hardware version 01

Further information on this topic: [Version identification of EtherCAT devices](#) [► 103].

2 EtherCAT Box - Introduction

The EtherCAT system has been extended with EtherCAT Box modules with protection class IP67. Through the integrated EtherCAT interface the modules can be connected directly to an EtherCAT network without an additional Coupler Box. The high-performance of EtherCAT is thus maintained into each module.

The extremely low dimensions of only 126 x 30 x 26.5 mm (h x w x d) are identical to those of the Fieldbus Box extension modules. They are thus particularly suitable for use where space is at a premium. The small mass of the EtherCAT modules facilitates applications with mobile I/O interface (e.g. on a robot arm). The EtherCAT connection is established via screened M8 connectors.

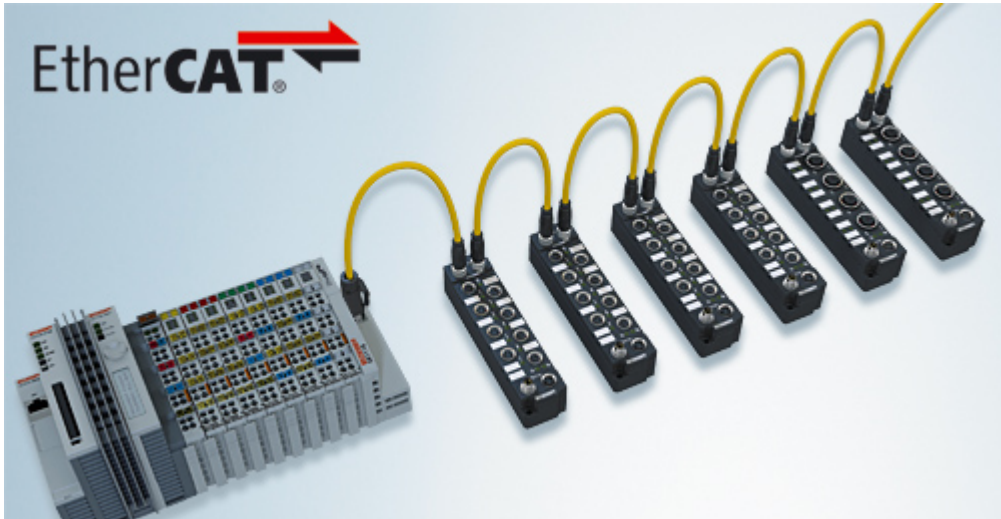


Fig. 1: EtherCAT Box Modules within an EtherCAT network

The robust design of the EtherCAT Box modules enables them to be used directly at the machine. Control cabinets and terminal boxes are now no longer required. The modules are fully sealed and therefore ideally prepared for wet, dirty or dusty conditions.

Pre-assembled cables significantly simplify EtherCAT and signal wiring. Very few wiring errors are made, so that commissioning is optimized. In addition to pre-assembled EtherCAT, power and sensor cables, field-configurable connectors and cables are available for maximum flexibility. Depending on the application, the sensors and actuators are connected through M8 or M12 connectors.

The EtherCAT modules cover the typical range of requirements for I/O signals with protection class IP67:

- digital inputs with different filters (3.0 ms or 10 μ s)
- digital outputs with 0.5 or 2 A output current
- analog inputs and outputs with 16 bit resolution
- Thermocouple and RTD inputs
- Stepper motor modules

XFC (eXtreme Fast Control Technology) modules, including inputs with time stamp, are also available.



Fig. 2: EtherCAT Box with M8 connections for sensors/actuators



Fig. 3: EtherCAT Box with M12 connections for sensors/actuators

i Basic EtherCAT documentation


You will find a detailed description of the EtherCAT system in the Basic System Documentation for EtherCAT, which is available for download from our website (www.beckhoff.com) under Downloads.

3 Product overview

The following table shows the products described in this documentation and the main distinguishing features.

Product	Power input	Diagnosis
EP9214-0023 [▶ 12]	7/8-inch connector	No
EP9214-0024 [▶ 13]	M12 connector, L-coded	No
EP9224-0023 [▶ 14]	7/8-inch connector	Yes
EP9224-0024 [▶ 16]	M12 connector, L-coded	Yes

3.1 EP9214-0023

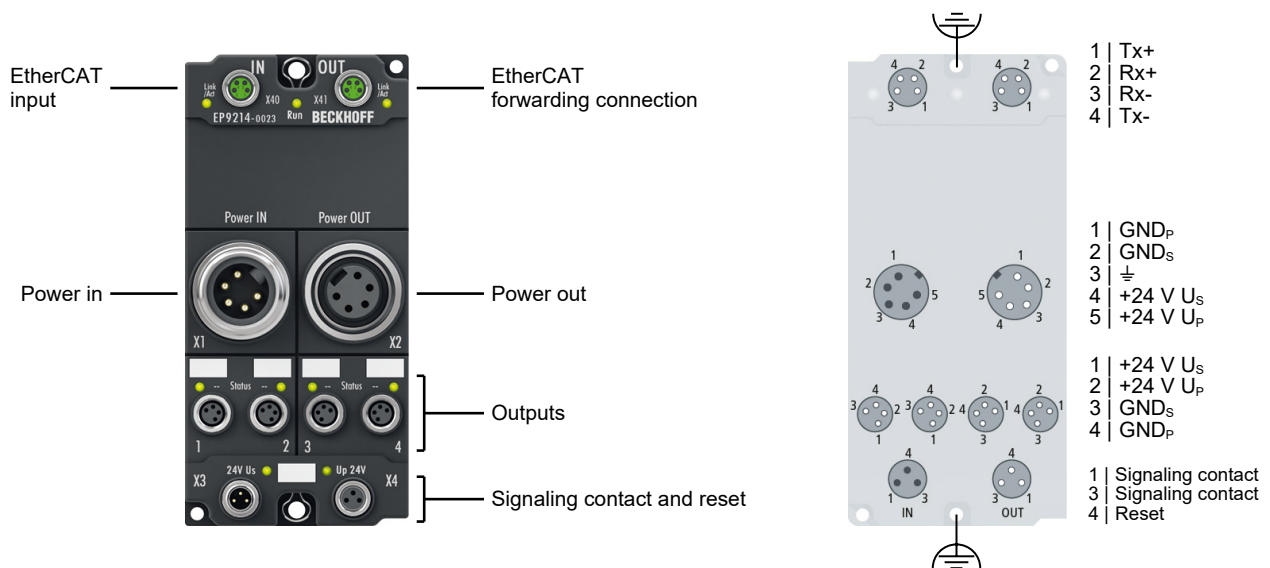

The EP9214-0023 enables connection of four EtherCAT Box power supply branches. In each 24 V branch the current consumption for the control voltage U_S and the peripheral voltage U_P is monitored, limited, and, if necessary, switched off.

The power distribution is supplied via a 7/8" connector with up to 16 A (per voltage supply U_S/U_P). Several modules can be configured in a cascade arrangement. In the event of a short-circuit in one of the four outputs, the affected output is switched off. The supply for the other branches remains active. The switch-off and control is done in such a way that the input voltage does not fall below 21 V. During startup consumers with large capacities can be added without problem.

The master can read diagnostic messages from the individual channels via the EtherCAT interface. The electronic overcurrent protection box EP9214-0023 is a 24 V DC EtherCAT Box with electronic fuse function including Class 2 approval in accordance with UL1310. By using the box, Class 2 circuits (< 100 VA) can be implemented with standard power supplies.

Special features

- eight independent 24 V DC channels
- switch-off characteristics selectable per channel
- channels can be switched on and off individually
- diagnostic data

Independent switching of individual consumer branches is also possible via the EtherCAT master.

In delivery state the eight outputs of the box (4 times U_S , 4 times U_P) are activated to enable operation without EtherCAT.


After an error caused the switch off of a channel, this channel remains switched off when you try to switch it on again and has to be set back actively by the EtherCAT master or a hardware reset at the box (lower M8 socket).

Quick links

[Installation \[► 26\]](#)

[Configuration \[► 42\]](#)

3.2 EP9214-0024

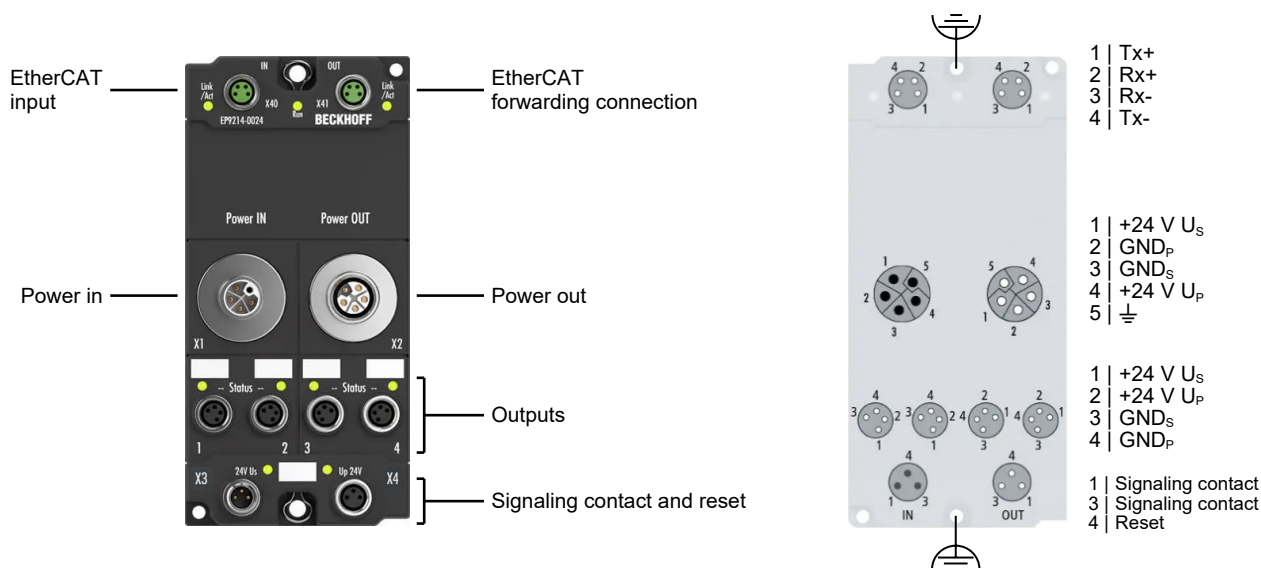

The EP9214-0024 enables connection of four EtherCAT Box power supply branches. In each 24 V branch the current consumption for the control voltage U_S and the peripheral voltage U_P is monitored, limited, and, if necessary, switched off.

The power distribution is supplied via a M12 connector (L-coded) with up to 16 A (per voltage supply U_S/U_P). Several modules can be configured in a cascade arrangement. In the event of a short-circuit in one of the four outputs, the affected output is switched off. The supply for the other branches remains active. The switch-off and control is done in such a way that the input voltage does not fall below 21 V. During startup consumers with large capacities can be added without problem.

The master can read diagnostic messages from the individual channels via the EtherCAT interface. The electronic overcurrent protection box EP9214-0024 is a 24 V DC EtherCAT Box with electronic fuse function including Class 2 approval in accordance with UL1310. By using the box, Class 2 circuits (< 100 VA) can be implemented with standard power supplies.

Special features

- eight independent 24 V DC channels
- switch-off characteristics selectable per channel
- channels can be switched on and off individually
- diagnostic data

Independent switching of individual consumer branches is also possible via the EtherCAT master.

In delivery state the eight outputs of the box (4 times U_S , 4 times U_P) are activated to enable operation without EtherCAT.


After an error caused the switch off of a channel, this channel remains switched off when you try to switch it on again and has to be set back actively by the EtherCAT master or a hardware reset at the box (lower M8 socket).

Quick links

[Installation \[► 26\]](#)

[Configuration \[► 42\]](#)

3.3 EP9224-0023

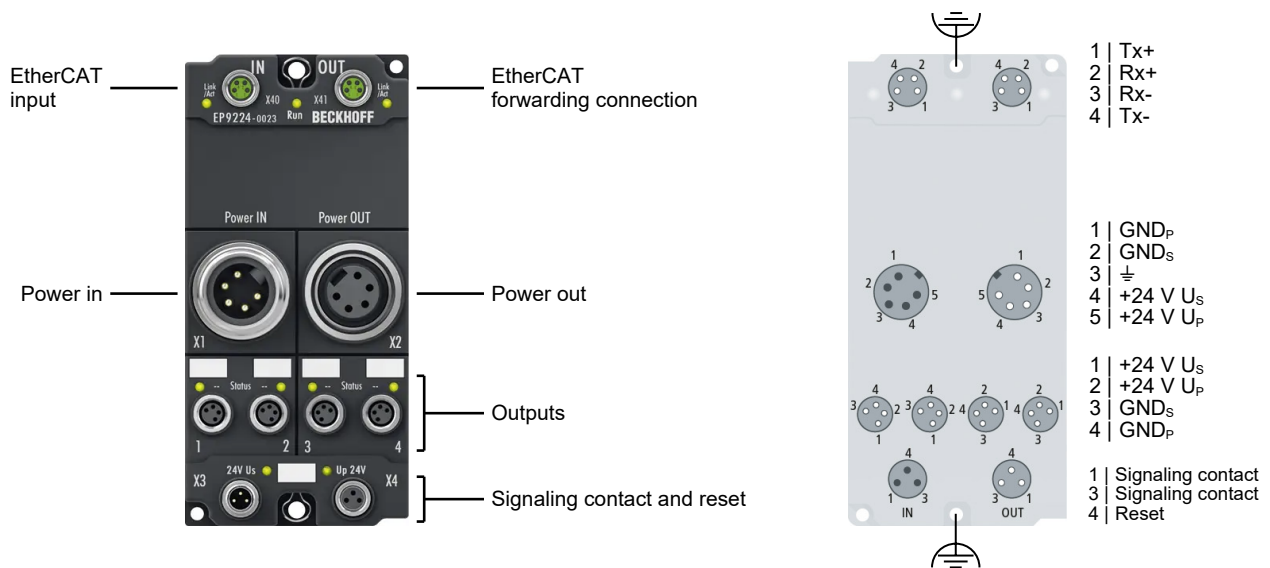

The EP9224-0023 enables connection of four EtherCAT Box power supply branches. In each 24 V branch, the current consumption for control voltage U_S and peripheral voltage U_P is monitored, limited and, if necessary, switched off.

The input voltage and current values of all outputs can be evaluated via the process data. A continuous data log of the relevant data can be retrieved in the event of an error in order to localize the cause of the error.

The power distribution is supplied via a 7/8-inch connector with up to 16 A (per U_S/U_P). Several modules can be cascaded via a downstream connection. In the event of a short-circuit in one of the four (eight) outputs the affected output is switched off. The supply for the other junctions remains active. The switch-off and control is done in such a way that the input voltage does not fall below 21 V. During startup consumers with large capacities can be added without problem.

The diagnostic messages of the individual channels can be read by the master via the EtherCAT interface. The electronic overcurrent protection box EP9224-0023 is a 24 V DC EtherCAT Box with electronic fuse function including Class 2 approval in accordance with UL1310. By using the box, Class 2 circuits (< 100 VA) can be implemented with standard power supplies.

Special features

- eight independent 24 V DC channels
- switch-off characteristic can be selected per channel
- channels can be switched on and off individually
- diagnostic data
- current and voltage values as process data
- diagnostic data logging

Independent switching of individual consumer branches is also possible via the EtherCAT master.

On delivery the eight box outputs (4x U_S and 4x U_P) are switched so that operation without EtherCAT is also possible.

After an error and the subsequent switching off of a channel, the channel remains off after switching the EP9224 off and on and must be actively reset by the EtherCAT master or by a hardware reset on the box (lower M8 connector).


In addition to the basic functions of the EP9214, the EP9224 also displays the voltage values of the PowerIn supply and all current values of the inputs and outputs in the process data.

Quick links

[Installation \[► 26\]](#)

[Configuration \[► 42\]](#)

3.4 EP9224-0024

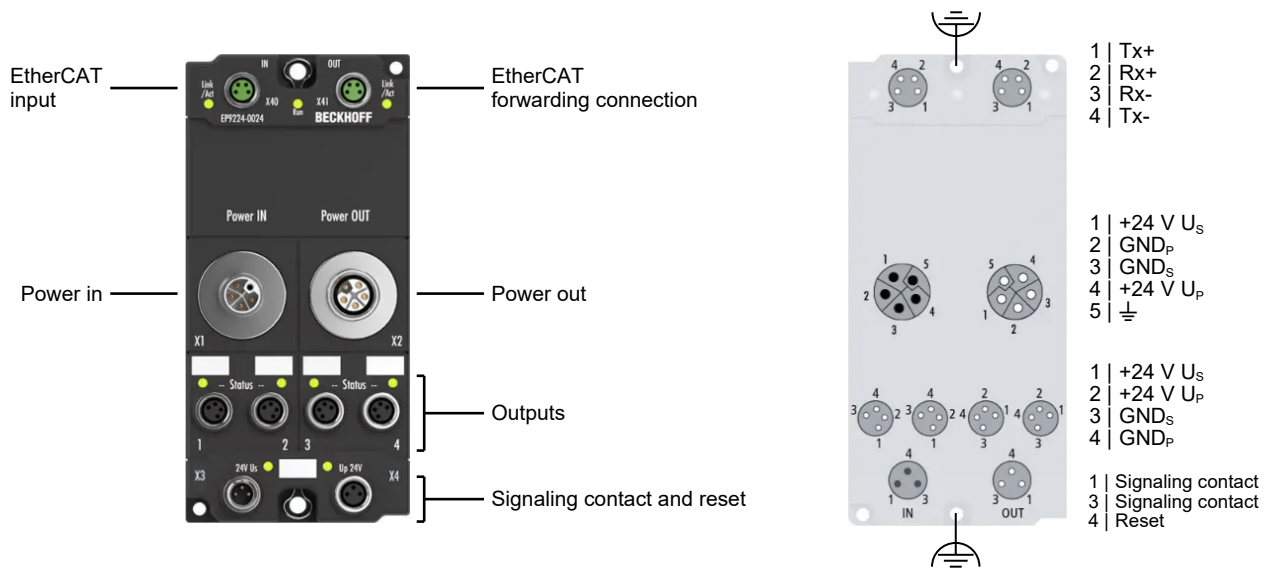

The EP9224-0024 enables connection of four EtherCAT Box power supply branches. In each 24 V branch, the current consumption for control voltage U_S and peripheral voltage U_P is monitored, limited and, if necessary, switched off.

The input voltage and current values of all outputs can be evaluated via the process data. A continuous data log of the relevant data can be retrieved in the event of an error in order to localize the cause of the error.

The power distribution is supplied via a M12 connector (L-coded) with up to 16 A (per U_S/U_P). Several modules can be cascaded via a downstream connection. In the event of a short-circuit in one of the four (eight) outputs the affected output is switched off. The supply for the other junctions remains active. The switch-off and control is done in such a way that the input voltage does not fall below 21 V. During startup consumers with large capacities can be added without problem.

The diagnostic messages of the individual channels can be read by the master via the EtherCAT interface. The electronic overcurrent protection box EP9224-0024 is a 24 V DC EtherCAT Box with electronic fuse function including Class 2 approval in accordance with UL1310. By using the box, Class 2 circuits (< 100 VA) can be implemented with standard power supplies.

Special features

- eight independent 24 V DC channels
- switch-off characteristic can be selected per channel
- channels can be switched on and off individually
- diagnostic data
- current and voltage values as process data
- diagnostic data logging

Independent switching of individual consumer branches is also possible via the EtherCAT master.

On delivery the eight box outputs (4x U_S and 4x U_P) are switched so that operation without EtherCAT is also possible.

After an error and the subsequent switching off of a channel, the channel remains off after switching the EP9224 off and on and must be actively reset by the EtherCAT master or by a hardware reset on the box (lower M8 connector).

In addition to the basic functions of the EP9214, the EP9224 also displays the voltage values of the PowerIn supply and all current values of the inputs and outputs in the process data.

Quick links

[Installation \[► 26\]](#)

[Configuration \[► 42\]](#)

3.5 Technical data

All values are typical values over the entire temperature range, unless stated otherwise.

EtherCAT	
Connection	2 x M8 socket, 4-pin, A-coded, shielded
Electrical isolation	500 V

Supply voltages	EP92x4-0023	EP92x4-0024
Connection	Input: 7/8-inch plug, 5-pin, 16-UN thread Forwarding connection: 7/8-inch socket, 5-pin, 16-UN thread	Input: M12 connector, 5-pin, L-coded Forwarding connection: M12 socket, 5-pin, L-coded
U_S nominal voltage	24 V _{DC} (-15 % / +20 %)	24 V _{DC} (-15 % / +20 %)
U_S sum current ¹⁾	max. 16 A at 40 °C	max. 16 A
Current consumption from U_S	110 mA + sum of the output currents	110 mA + sum of the output currents
U_P nominal voltage	24 V _{DC} (-15 % / +20 %)	24 V _{DC} (-15 % / +20 %)
U_P sum current ¹⁾	max. 16 A at 40 °C	max. 16 A
Current consumption from U_P	40 mA + sum of the output currents	40 mA + sum of the output currents

¹⁾ This value corresponds to the current carrying capacity of the connectors.

Outputs	EP92x4-0023	EP92x4-0024
Number	4	4
Connection	4x M8 socket, black	4x M8 socket, black
Cable length	max. 30 m	max. 30 m
Output current per channel	max. 4 A per U_S and U_P	max. 4 A per U_S and U_P
Output current limitation per channel	Depending on the hardware version: <ul style="list-style-type: none"> HW 16 and higher: 4.4 A per U_S and U_P. Switch-off after typ. 160 ms current limitation. HW 15 and lower: 7.0 A per U_S and U_P. Switch-off after typ. 50 ms current limitation. 	4.4 A per U_S and U_P Switch-off after typ. 160 ms current limitation.
Output power limitation per channel	Only in HW 16 and higher: 100 W per U_S and U_P . Switch-off after typ. 160 ms power limitation.	100 W per U_S and U_P Switch-off after typ. 160 ms power limitation.
Overload switch-off	Individually configurable for each channel	Individually configurable for each channel
Internal fuse (fail-safe element)	7 A (FF)	7 A (FF)
Parallel connection of outputs	Not permissible	Not permissible
Inrush delay ²⁾	adjustable: 10 ms, 100 ms, 200 ms	adjustable: 10 ms, 100 ms, 200 ms

²⁾ The output voltages are switched on one after the other at the start so that the input inrush currents do not add up.

Protective functions and diagnostics	EP9214-002x	EP9224-002x
Overtemperature protection	Threshold values: <ul style="list-style-type: none"> • $T_{\text{warn}} = 80\text{ °C}$ → warning if exceeded • $T_{\text{err}} = 85\text{ °C}$ → error message and shutdown if exceeded The outputs can only be switched on if the temperature is below 70 °C .	
Undervoltage protection	Threshold values: <ul style="list-style-type: none"> • $U_{\text{warn}} = 21\text{ V}$ → warning if the voltage falls below • $U_{\text{err}} = 19\text{ V}$ → error message and shutdown if the voltage falls below The outputs can only be switched on if the voltage is higher than 21 V .	
Data logging	--	40 entries Sample time: 1...1000 ms

Reset contact and signaling contact	
Connection	M8 connector X3: 3-pin, black M8 socket X4: 3-pin, black
Reset contact	Digital input, nominal voltage: 24 V_{DC}
Signaling contact	Potential-free NO contact

Measured values	EP9214-002x	EP9224-002x
Presentation	--	Measured current values: <ul style="list-style-type: none"> • Output currents per channel: 1 mA / LSB • Sum currents: 10 mA / LSB Measured voltage values: 100 mV / LSB
Resolution	--	Measured current values: 10 mA Measured voltage values: 100 mV
Accuracy	--	5 % of full scale value

Housing data	
Dimensions W × H × D	60 mm × 150 mm × 26,5 mm (without connectors)
Weight	approx. 440 g
Material	PA6 (polyamide)
Installation position	variable

Environmental conditions	
Ambient temperature during operation	-25...+60 °C -25...+45 °C (+55 °C) according to UL, see chapter UL Requirements [► 40].
Ambient temperature during storage	-40...+85 °C
Vibration resistance, shock resistance	in accordance with EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	in accordance with EN 61000-6-2 / EN 61000-6-4
Protection rating	IP65, IP66, IP67 according to EN 60529 (not evaluated by UL)

Approvals/markings	
Approvals/markings *)	<ul style="list-style-type: none"> • CE • UL (EP92x4-0023 only from HW 17) • Class 2 according to UL 1310 (EP92x4-0023 only from HW 17)

*) Real applicable approvals/markings see type plate on the side (product marking).

Additional tests

The devices have undergone the following additional tests:

Test	Explanation
Vibration	10 frequency sweeps in 3 axes
	5 Hz < f < 60 Hz displacement 0.35 mm, constant amplitude
	60.1 Hz < f < 500 Hz acceleration 5 g, constant amplitude
Shocks	1000 shocks in each direction, in 3 axes
	35 g, 11 ms

3.6 Scope of supply

Make sure that the following components are included in the scope of delivery:

EP92x4-0023

- 1 x EP92x4-0023
- 10 x labels, blank (1 strip of 10)
- 2 x protective cap for EtherCAT socket, M8, green
- 1 x protective cap for supply voltage output, 7/8-inch socket, black (pre-assembled)
- 4 x protective cap for supply voltage output, black (pre-assembled)
- 1 x protective cap for X3, transparent (pre-assembled)
- 1 x protective cap for X4, black (pre-assembled)

● Pre-assembled protective caps do not ensure IP67 protection

i Protective caps are pre-assembled at the factory to protect connectors during transport. They may not be tight enough to ensure IP67 protection.

Ensure that the protective caps are correctly seated to ensure IP67 protection.

EP92x4-0024

- 1 x EP92x4-0024
- 10 x labels, blank (1 strip of 10)
- 2 x protective cap for EtherCAT socket, M8, green
- 4 x protective cap for supply voltage output, black (pre-assembled)
- 1 x protective cap for X3, transparent (pre-assembled)
- 1 x protective cap for X4, black (pre-assembled)

● Pre-assembled protective caps do not ensure IP67 protection

i Protective caps are pre-assembled at the factory to protect connectors during transport. They may not be tight enough to ensure IP67 protection.

Ensure that the protective caps are correctly seated to ensure IP67 protection.

3.7 Process image

- ▲  Box 1 (EP92x4-002x)
 - ▷  DPO Inputs Channel 1
 - ▷  DPO Inputs Channel 2
 - ▷  DPO Inputs Channel 3
 - ▷  DPO Inputs Channel 4
 - ▷  DPO Inputs Device
 - ▷  DPO Outputs Channel 1
 - ▷  DPO Outputs Channel 2
 - ▷  DPO Outputs Channel 3
 - ▷  DPO Outputs Channel 4
 - ▷  DPO Outputs Device
 - ▷  WcState
 - ▷  InfoData

DPO Inputs Channel n

Status bits of the channels.

DPO Inputs Device

Status bits of the entire device.

DPO Outputs Channel n

Output bits of the channels.

DPO Outputs Device

Output bits of the entire device.

WcState and InfoData

EtherCAT system variables.

DPO Inputs Channel 1 to 4

Status bits of the individual channels.

EP9214-002x:

- ▲  DPO Inputs Channel 1
 -  Error Us
 -  Error Up
 -  Warning Us
 -  Warning Up
 -  Status Us
 -  Status Up
 -  Channel Error
 -  Sync error
 -  TxPDO State
 -  TxPDO Toggle

Error Us: U_s was switched off due to overload.

Error Up: U_p was switched off due to overload.

Warning Us: The output current U_s currently exceeds the nominal current (CoE parameter 80n0:12).
If the overcurrent persists, U_s is switched off on this channel.

Warning Up: The output current U_s currently exceeds the nominal current (CoE parameter 80n0:13).
If the overcurrent persists, U_p is switched off on this channel.

Status Us: Switching status (on/off) of the output voltage U_s .

Status Up: Switching status (on/off) of the output voltage U_p .

Channel Error: "Error Us" or "Error Up" is TRUE.

EP9224-002x:

- ▲  DPO Inputs Channel 1
 -  Error Us
 -  Error Up
 -  Warning Us
 -  Warning Up
 -  Status Us
 -  Status Up
 -  Channel Error
 -  Error Sum Current
 -  Warning Sum Current
 -  TxPDO State
 -  TxPDO Toggle
 -  Current Us
 -  Current Up

Error Us: U_s was switched off due to overload.

Error Up: U_p was switched off due to overload.

Warning Us: The output current U_s currently exceeds the nominal current (CoE parameter 80n0:12).
If the overcurrent persists, U_s is switched off on this channel.

Warning Up: The output current U_s currently exceeds the nominal current (CoE parameter 80n0:13).
If the overcurrent persists, U_p is switched off on this channel.

Status Us: Switching status (on/off) of the output voltage U_s .

Status Up: Switching status (on/off) of the output voltage U_p .

Channel Error: "Error Us" or "Error Up" is TRUE.

Error Sum Current: The channel was switched off due to sum overcurrent.

Warning Sum Current: The sum current $I_s + I_p$ of the channel currently exceeds the nominal sum current (CoE parameter 80n0:14).
If the overcurrent persists, the channel is switched off.

Current Us, Current Up: 16-bit measured values of the current output currents.

DPO Inputs Device

Status bits for the entire device.

EP9214-002x:

- ▲  DPO Inputs Device
 -  Temperature Warning
 -  Temperature Error
 -  Us Warning
 -  Us Error
 -  Up Warning
 -  Up Error
 -  Global Error Bit
 -  Reset Input
 -  TxPDO State
 -  TxPDO Toggle

Temperature Warning: The internal temperature exceeds the warning threshold.

Temperature Error: The internal temperature has exceeded the error threshold. The output channels have been switched off.

U_S Warning, U_P Warning: Undervoltage warning. The respective input voltage is currently below the warning threshold value U_{warn} .

Us Error, Up Error: Undervoltage switch-off. The respective input voltage has fallen below the error threshold value U_{err} . The output voltages have been switched off.

Global Error Bit: There is at least one error message.

Reset Input: Input level (0/1) of the reset input.

EP9224-002x:

- ▲  DPO Inputs Device
 -  Temperature Warning
 -  Temperature Error
 -  Us Warning
 -  Us Error
 -  Up Warning
 -  Up Error
 -  Global Error Bit
 -  Sum Current Warning
 -  Sum Current Error
 -  Reset Input
 -  TxPDO State
 -  TxPDO Toggle
 -  Current Us
 -  Current Up
 -  Voltage Us
 -  Voltage Up
 -  Temperature

Temperature Warning: The internal temperature exceeds the warning threshold.

Temperature Error: The internal temperature has exceeded the error threshold. The output channels have been switched off.

U_S Warning, U_P Warning: Undervoltage warning. The respective input voltage is currently below the warning threshold value U_{warn} .

Us Error, Up Error: Undervoltage switch-off. The respective input voltage has fallen below the error threshold value U_{err} . The output voltages have been switched off.

Global Error Bit: There is at least one error message.

Sum Current Warning: The input sum current $I_S + I_P$ currently exceeds the nominal sum current (CoE parameter F80E:12). If the overcurrent persists, all channels are switched off.

Sum Current Error: All output voltages were switched off due to sum overcurrent.

Reset Input: Input level (0/1) of the reset input.

Current Us: Current U_S input current at supply voltage input X70.

Current Up: Current U_P input current at supply voltage input X70.

Voltage Us: Current value of the supply voltage U_S in 1/10V

Voltage Up: Current value of the supply voltage U_P in 1/10V

Temperature: Current internal temperature of the device.

DPO Outputs Channel 1 to 4

Output data for the individual channels.

- ▲  DPO Outputs Channel 1
 -  Output Us
 -  Output Up
 -  Reset Us
 -  Reset Up

Output U_s, Output U_p: Switches the respective output voltage on or off.

Reset U_s, Reset U_p: Reset the error state of the respective output voltage.

DPO Outputs Device

Output data for the entire device.

- ▲  DPO Outputs Device
 -  Enable Control Via Fieldbus
 -  Global Reset

Enable Control Via Fieldbus:


- TRUE: Enables the switching of the output voltages via the output variables "Output Us" and "Output Up".
- FALSE: Enables the automatic switching on of the output voltages according to the CoE parameters 80n0:02 and 80n0:03.

Global Reset: Reset the error state of the device and all channels.

4 Mounting and cabling

4.1 Installation

4.1.1 Dimensions EP92x4-0023

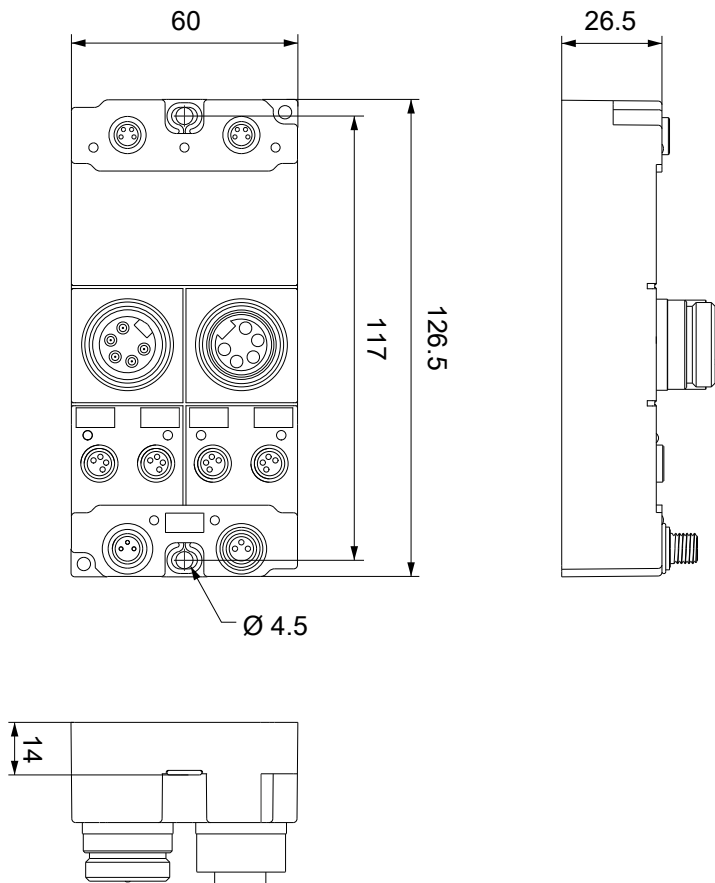


All dimensions are given in millimeters.
The drawing is not true to scale.

Housing features

Housing material	PA6 (polyamide)
Sealing compound	polyurethane
Mounting	two fastening holes Ø 4.5 mm for M4
Metal parts	brass, nickel-plated
Contacts	CuZn, gold-plated
Power feed through	max. 16 A at 40 °C (7/8" connectors)
Mounting position	variable
Protection class	IP65, IP66, IP67 (conforms to EN 60529) when screwed together
Dimensions (H x W x D)	approx. 126 x 60 x 26.5 mm (without connectors)

4.1.2 Dimensions EP92x4-0024

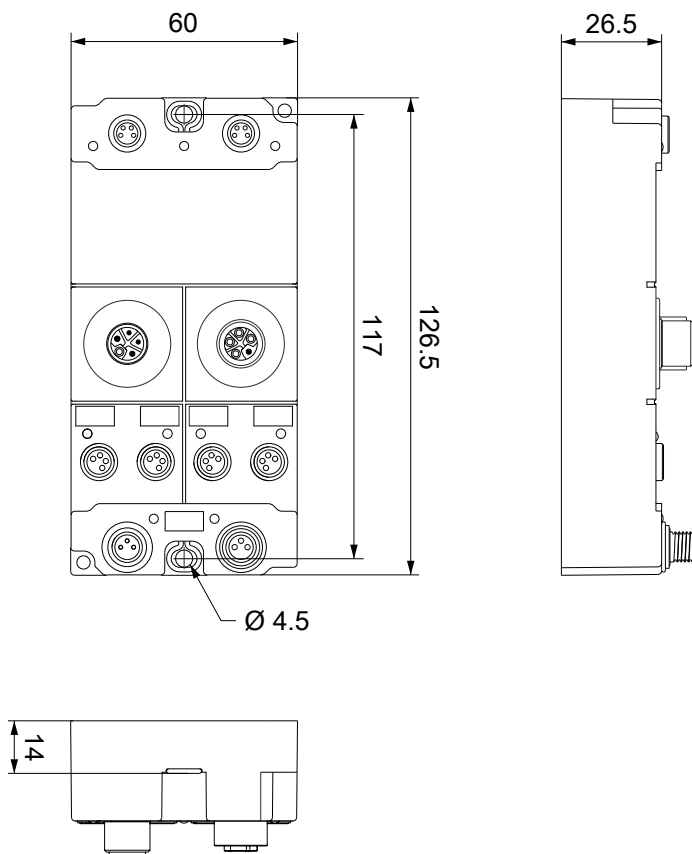

All dimensions are given in millimeters.
The drawing is not true to scale.

Housing features

Housing material	PA6 (polyamide)
Sealing compound	polyurethane
Mounting	two fastening holes Ø 4.5 mm for M4
Metal parts	brass, nickel-plated
Contacts	CuZn, gold-plated
Power feed through	max. 16 A (L-coded M12 connectors)
Mounting position	variable
Protection class	IP65, IP66, IP67 (conforms to EN 60529) when screwed together
Dimensions (H x W x D)	approx. 126 x 60 x 26.5 mm (without connectors)

4.1.3 Fixing

NOTICE

Dirt during assembly

Dirty connectors can lead to malfunctions. Protection class IP67 can only be guaranteed if all cables and connectors are connected.

- Protect the plug connectors against dirt during the assembly.

Mount the module with two M4 screws in the centrally located mounting holes.



Cooling plate

The box has a cooling plate on the underside. For the effective dissipation of the resultant power loss, the box must be bolted to a metal base, e.g. the machine bed, if possible making contact over the entire surface. A temperature-related automatic switch-off of the box can occur if care is not taken to ensure that the power loss from the module is dissipated via the cooling plate. A corresponding temperature error bit is then set.

4.1.4 Tightening torques for plug connectors

Screw connectors tight with a torque wrench. (e.g. ZB8801 from Beckhoff)

Connector diameter	Tightening torque
M8	0.4 Nm
M12	0.6 Nm
7/8"	1.5 Nm

4.2 Functional earth (FE)

Functional earth via the mounting holes

The mounting holes also serve as connections for the functional earth.

Make sure that the box is grounded with low impedance via both fastening screws.



Functional earth via the supply lines

The $\perp$ pins of connections X1 and X2 are connected directly to the mounting holes.

Connect the functional earth of the $\perp$ cores in accordance with the following instructions:

- If possible, connect two devices with a pre-assembled cable. Possible types of pre-assembled cables can be found in the chapter [Accessories](#) [► 102].
- Otherwise: ground the $\perp$ core with low impedance as near as possible to the remote station.

4.3 Supply voltage input and downstream connection

⚠ WARNING

Power supply from SELV / PELV power supply unit!

SELV / PELV circuits (safety extra-low voltage / protective extra-low voltage) according to IEC 61010-2-201 must be used to supply this device.

Notes:

- SELV / PELV circuits may give rise to further requirements from standards such as IEC 60204-1 et al, for example with regard to cable spacing and insulation.
- A SELV supply provides safe electrical isolation and limitation of the voltage without a connection to the protective conductor, a PELV supply also requires a safe connection to the protective conductor.

⚠ CAUTION

Observe the UL requirements

- When operating under UL conditions, observe the warnings in the chapter [UL Requirements](#) [► 40].

The EtherCAT Box has one input for two supply voltages:

- **Control voltage U_s**

The following sub-functions are supplied from the control voltage U_s :

- the fieldbus
- the processor logic
- typically the inputs and the sensors if the EtherCAT Box has inputs.

- **Peripheral voltage U_p**

For EtherCAT Box modules with digital outputs the digital outputs are typically supplied from the peripheral voltage U_p . U_p can be supplied separately. If U_p is switched off, the fieldbus function, the function of the inputs and the supply of the sensors are maintained.

The exact assignment of U_s and U_p can be found in the pin assignment of the I/O connections.

Forwarding the supply voltages

The power IN and OUT connections are bridged in the module. This makes it easy to pass on the supply voltages U_s and U_p from EtherCAT Box to EtherCAT Box.

NOTICE

Note the maximum current

When forwarding the supply voltages U_s and U_p , ensure that the permissible current for the connectors is not exceeded:

M8 connector: max. 4 A
M12 connector: max. 16 A
7/8-inch connector: max 16 A

NOTICE

Unintentional cancellation of the electrical isolation possible

In some types of EtherCAT Box modules the ground potentials GND_s and GND_p are connected.

- If several EtherCAT Box modules are supplied with the same electrically isolated voltages, check whether there is an EtherCAT Box among them in which the ground potentials are connected.

4.3.1 Connection

NOTICE

Use cables with suitable cross-sections

Ensure that the cross-sections of the cables employed are suitable for the load circuit inputs and outputs and the respective nominal current being used.

Two connections in the center of the modules are used for feeding and forwarding the supply voltages:

- “Power IN”, left: Supply of the supply voltages
- “Power OUT”, right: Forwarding connection for the supply voltages



Two LEDs next to the device identifier label indicate the status of the supply voltages.

Pin assignment EP92x4-0023

Input X1 7/8-inch connector	Downstream connection X2 7/8-inch socket	Pin	Function
		1	GND _P
		2	GND _S
		3	⏏
		4	+24 V _{DC} U _S
		5	+24 V _{DC} U _P

The contacts of the 7/8-inch connectors can conduct a maximum current of 16 A at 40 °C.

Pin assignment EP92x4-0024

Input X1 M12 connector, L-coded	Downstream connection X2 M12 socket, L-coded	Pin	Function
		1	+24 V _{DC} U _S
		2	GND _P
		3	GND _S
		4	+24 V _{DC} U _P
		5	⏏

For suitable connection cables, see chapter [Accessories](#) [► 102].

4.3.2 Status LEDs

Status LEDs for the power supply





LED	Display	Meaning
Us (control voltage)	off	The supply voltage Us is not available.
	green illuminated	The supply voltage Us is available.
Up (peripheral voltage)	off	The supply voltage Up is not available.
	green illuminated	The supply voltage Up is available.

4.3.3 Conductor losses

Take into account the voltage drop on the supply line when planning a system. Avoid the voltage drop being so high that the supply voltage at the box lies below the minimum nominal voltage. Variations in the voltage of the power supply unit must also be taken into account.

Voltage drop on the supply line

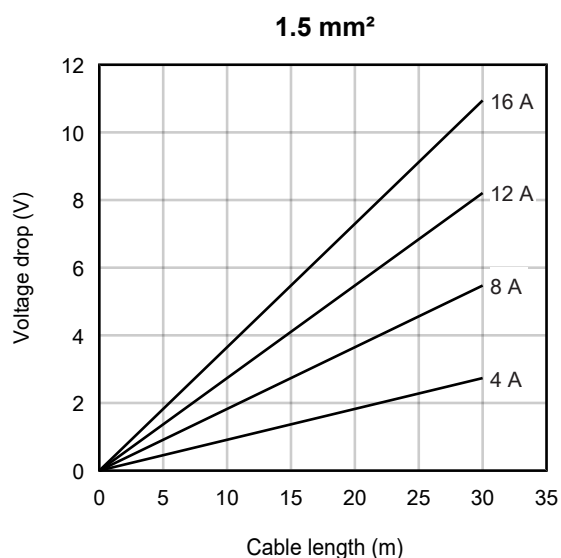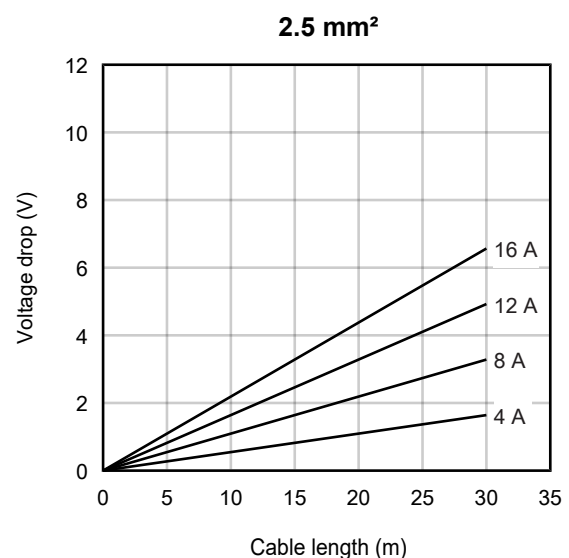

4.4 Supply voltage outputs

4.4.1 Connection

NOTICE

Risk of confusion: supply voltages and EtherCAT

Defect possible through incorrect insertion.

- Observe the color coding of the connectors:
black: Supply voltages
green: EtherCAT

The supply voltages are output via four 4-pin M8 sockets labeled 1, 2, 3 and 4.



Connection

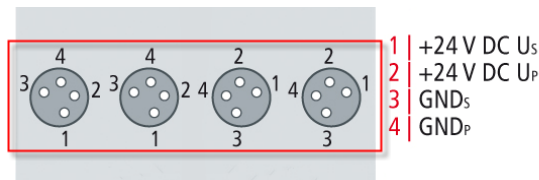


Fig. 4: Connection of the M8 sockets

Contact	Voltage	
1	Control voltage U_s , +24 V _{DC}	
2	Peripheral voltage U_p , +24 V _{DC}	
3	GNDs*	*) may be internally connected to one another depending on the connected module: see individual module descriptions
4	GNDp*	

The contacts of the M8 connectors can conduct a maximum current of 4 A.

A LED indicates the status of the supply voltage outputs.

Control voltage U_s : 24 V_{DC}

Power is supplied to the fieldbus, the processor logic, the inputs and the sensors from the control voltage U_s (24 V_{DC}). The control voltage is electrically isolated from the fieldbus circuitry.

Peripheral voltage U_p : 24 V_{DC}

The peripheral voltage U_p (24 V_{DC}) supplies the digital outputs; it can be supplied separately. Hence, if the load voltage is switched off, the fieldbus function as well as the supply and function of the inputs are retained.

Electrical isolation

The grounds of the control voltage (GND_S) and peripheral voltage (GND_P) are electrically isolated from each other in order to ensure the electrical isolation of the peripheral devices on U_P from the control voltage.

NOTICE

Unintentional cancellation of the electrical isolation possible

In some types of EtherCAT Box modules the ground potentials GND_S and GND_P are connected.


- If several EtherCAT Box modules are supplied with the same electrically isolated voltages, check whether there is an EtherCAT Box among them in which the ground potentials are connected.

4.4.2 Status LEDs and status bits

Each supply voltage output has a status LED that indicates the status of the output. The LED applies to both voltages / currents (U_S and U_P ; logical OR).



The status bits are located in the process data. They report statuses, warnings and errors for the entire device.

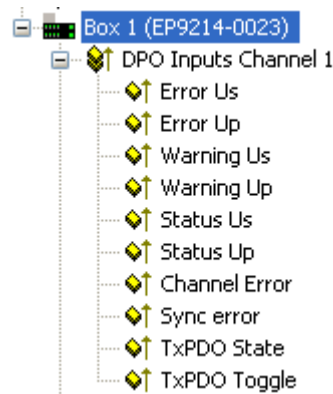

The following table shows the meaning of different combinations of messages by status LEDs and status bits.





LED	Status Us / Up	Warning	Error Us / Up	Description
off	0	0	0	The output is ready
Green	1	0	0	The output is just switching on
Green	1	0	0	The output is switched on. Normal operating state.
Flashing green	1	1	0	The output is still operating, but will switch off if conditions remain unchanged (Warning Ux).
Flashing red	0	1	1	The output has been switched off (Error Ux). Switching on again is not yet possible (waiting time of 20 seconds)
Red	0	0	1	The output has been disabled and can be returned to a normal state by a reset.

Initialization

When switching on the power supply, all green LEDs and then all red LEDs are switched on briefly to test the LEDs.

4.4.3 Power cable conductor losses M8

The ZK2020-xxxx-yyyy power cables should not exceed the total length of 15 m at 4 A (with forwarding connection). When cabling, please note that at 24 V nominal voltage, the functionality of the modules can no longer be guaranteed from a voltage drop of 6 V. Variations in the output voltage from the power supply unit must also be taken into account.

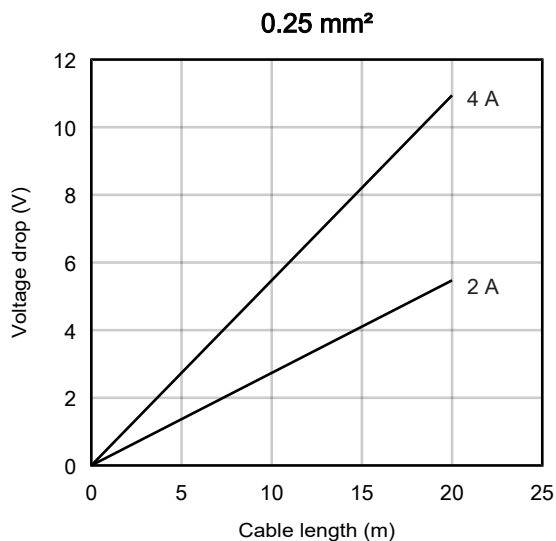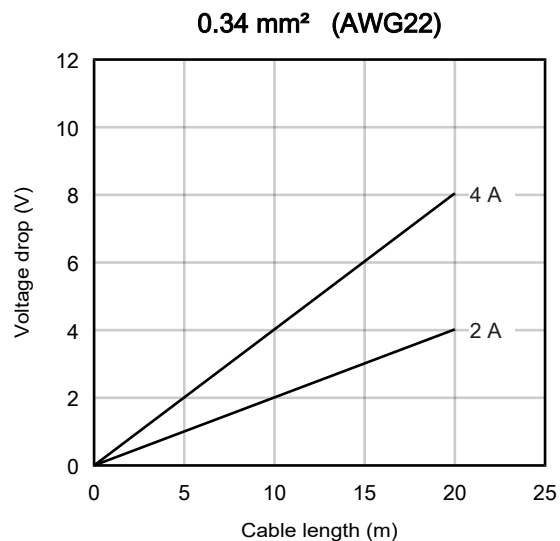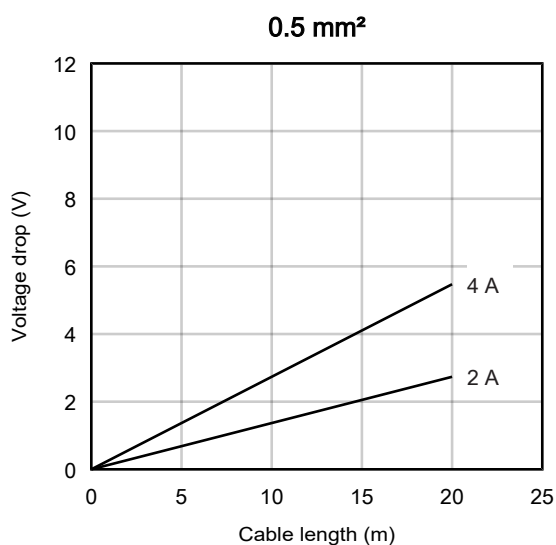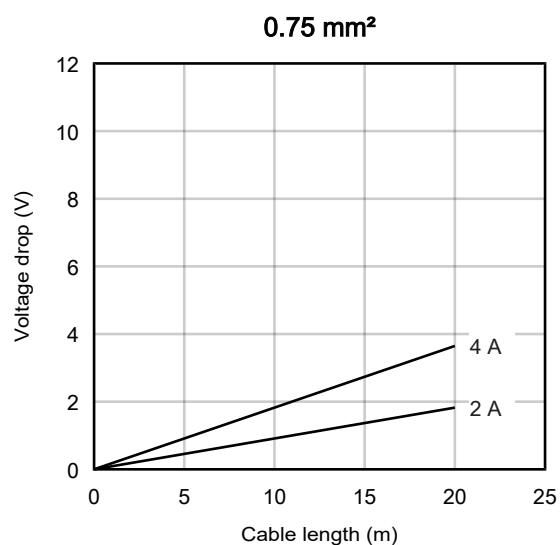

Example

8 m power cable with 0.34 mm² cross-section has a voltage drop of 3.2 V at 4 A.

4.5 EtherCAT

4.5.1 Connectors

NOTICE

Risk of confusion: supply voltages and EtherCAT

Defect possible through incorrect insertion.

- Observe the color coding of the connectors:
black: Supply voltages
green: EtherCAT

EtherCAT Box Modules have two green M8 sockets for the incoming and downstream EtherCAT connections.



Fig. 5: EtherCAT connectors

Connection




Fig. 6: M8 socket

EtherCAT	M8 socket	Core colors		
Signal	Contact	ZB9010, ZB9020, ZB9030, ZB9032, ZK1090-6292, ZK1090-3xxx-xxxx	ZB9031 and old versions of ZB9030, ZB9032, ZK1090-3xxx-xxxx	TIA-568B
Tx +	1	yellow ¹⁾	orange/white	white/orange
Tx -	4	orange ¹⁾	orange	orange
Rx +	2	white ¹⁾	blue/white	white/green
Rx -	3	blue ¹⁾	blue	green
Shield	Housing	Shield	Shield	Shield

¹⁾ Core colors according to EN 61918



Adaptation of core colors for cables ZB9030, ZB9032 and ZK1090-3xxxx-xxxx

For standardization, the core colors of the ZB9030, ZB9032 and ZK1090-3xxx-xxxx cables have been changed to the EN61918 core colors: yellow, orange, white, blue. So there are different color codes in circulation. The electrical properties of the cables have been retained when the core colors were changed.

4.5.2 Status LEDs



Fig. 7: EtherCAT Status LEDs

L/A (Link/Act)

A green LED labelled "L/A" is located next to each EtherCAT socket. The LED indicates the communication state of the respective socket:

LED	Meaning
off	no connection to the connected EtherCAT device
lit	LINK: connection to the connected EtherCAT device
flashes	ACT: communication with the connected EtherCAT device

Run

Each EtherCAT slave has a green LED labelled "Run". The LED signals the status of the slave in the EtherCAT network:

LED	Meaning
off	Slave is in "Init" state
flashes uniformly	Slave is in "Pre-Operational" state
flashes sporadically	Slave is in "Safe-Operational" state
lit	Slave is in "Operational" state

Description of the EtherCAT slave states

4.5.3 Cables

For connecting EtherCAT devices only shielded Ethernet cables that meet the requirements of at least category 5 (CAT5) according to EN 50173 or ISO/IEC 11801 should be used.

EtherCAT uses four wires for signal transmission.
Thanks to automatic line detection ("Auto MDI-X"), both symmetrical (1:1) or cross-over cables can be used between Beckhoff EtherCAT.

Detailed recommendations for the cabling of EtherCAT devices


4.6 Monitoring and reset contacts

The box has a monitoring contact (signaling contact) and a reset contact. These contacts are fed out via an M8 plug and an M8 socket.

The contacts of this M8 plug and M8 socket are wired together 1:1.



Connection

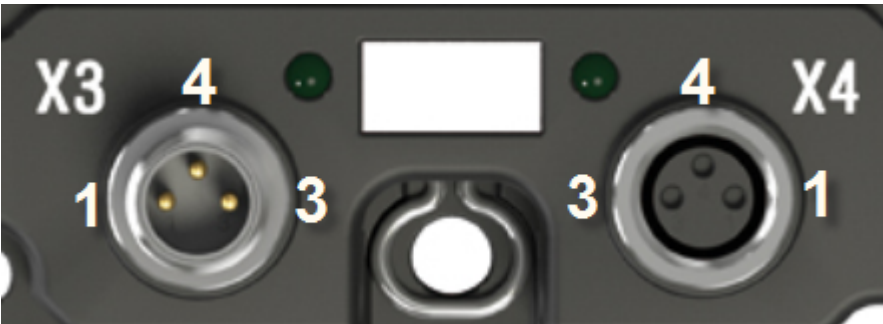

Contact	Meaning
Pins 1 and 3: Monitoring	Potential-free signaling contact (NO contact). It is closed on application of the supply voltage. It is opened if an error occurs in one of the eight load circuits
Pin 4: Reset	All errors are reset by applying 24 V _{DC} to the Reset contact.

The contacts of the M8 connectors can conduct a maximum current of 4 A.

4.7 UL Requirements

When operating under UL conditions, the following additional requirements must be met:

Environmental conditions

- Indoor operation only.
- Ambient temperature:
 - Max. 55 °C if the input current is 12 A or less.
 - Max. 45 °C if the input current exceeds 12 A.
- Relative air humidity: max. 95 %, no condensation.

Connection

Connection exclusively with UL-certified cables (CYJV or PVVA):

- With an ambient temperature of up to 45 °C and a maximum input current of 12 A, the cables must be designed for an ambient temperature of at least 80 °C.
- If the ambient temperature exceeds 45 °C and/or the input current exceeds 12 A, the cables must be designed for an ambient temperature of at least 90 °C.
- Do not connect the device to telecommunications networks.

4.8 Disposal



Products marked with a crossed-out wheeled bin shall not be discarded with the normal waste stream. The device is considered as waste electrical and electronic equipment. The national regulations for the disposal of waste electrical and electronic equipment must be observed.

5 Commissioning and configuration

5.1 Integration in TwinCAT

The procedure for integration in a TwinCAT project is described in these [Quick start guide](#).

5.2 Operation with or without EtherCAT master

The box is preset in the factory and delivered with a set nominal current of 4.0 A and all eight channels switched on.

NOTICE

The channels switch on automatically during commissioning

In the basic setting the nominal current of the box is 4 A per channel. Shortly after the box is supplied with voltage, all channels are switched on with a delay of 100 ms each.

This is preset by the CoE object 0xF707:01 “Enable Control Via Fieldbus”:

Index	Name	Flags	Value
802F:0	DPO Vendor data Ch.3	RW	> 20 <
8030:0	DPO Settings Ch.4	RW	> 22 <
803F:0	DPO Vendor data Ch.4	RW	> 20 <
8040:0	LOG Settings	RW	> 17 <
F000:0	Modular device profile	RO	> 2 <
F008	Code word	RW	0x00000000 (0)
F010:0	Module list	RW	> 5 <
F607:0	DPO Inputs Device	RO	> 25 <
F707:0	DPO Outputs Device	RO	> 17 <
F707:01	Enable Control Via Fieldbus	RO P	FALSE
F707:04	Global Reset	RO P	FALSE
F707:11	Reset Extended Diag Data	RO P	FALSE
F80E:0	DPO Settings Device	RW	> 22 <
F81F:0	DPO Vendor Data Device	RW	> 26 <

If the box is operated on an EtherCAT master, the basic setting or the bootup can be adapted.

This is done via the variable “DPO Outputs Device” -> “Enable Control Via Fieldbus” in the process data.

At the next power-on of the box the load circuits will then be switched on depending on the settings in the CoE objects.



In the case of EtherCAT use, adjust all parameters first

If the box is being operated for the first time with an EtherCAT connection, all parameter must be adjusted.

NOTICE

Outputs switch to the default status without an EtherCAT connection

The EtherCAT connection may be disconnected once the box has been parameterized with an EtherCAT Master. However, the voltage and current values of all outputs switch to the default status in this case. If the connection to the EtherCAT Master is restored, the previously set values are available again.

Example of the parameterization of the outputs when using EtherCAT

Different settings of the Box Module can be made on the "CoE – Online" tab. As an example, the "Nominal Current Us" (Index: 8000:12) can be set by double-clicking on this parameter to open the "Set Value Dialog" (see illustration below).

The screenshot shows the Beckhoff configuration software interface. At the top, there are tabs: General, EtherCAT, Process Data, Startup, CoE - Online, and Online. The 'CoE - Online' tab is selected. Below the tabs, there are buttons for 'Update List', 'Advanced...', and 'Add to Startup...'. There are also checkboxes for 'Auto Update', 'Single Update', and 'Show Offline Data'. A text field for 'Module OD (AoE Port):' is set to '0'. Below this is a table of parameters:

Index	Name	Flags	Value	Unit
7040:0	LOG Control	RO	> 2 <	
8000:0	DPO Settings Ch.1	RW	> 22 <	
8000:02	Default State Us	RW	TRUE	
8000:03	Default State Up	RW	TRUE	
8000:04	Enable Sum Current Limitation	RW	FALSE	
8000:11	Characteristic	RW	Fast acting (1)	
8000:12	Nominal Current Us	RW	0x0FA0 (4000)	
8000:13	Nominal Current Up	RW	0x0FA0 (4000)	
8000:14	Nominal Sum Current	RW	0x0FA0 (4000)	
8000:15	Timestamp 1 Trigger	RW	Error Us (0)	
8000:16	Timestamp 2 Trigger	RW	Error Us (0)	
800F:0	DPO Vendor data Ch.1	RW	> 20 <	
8010:0	DPO Settings Ch.2	RW	> 22 <	
801F:0	DPO Vendor data Ch.2	RW	> 20 <	

The parameter '8000:12 Nominal Current Us' is highlighted with a red box. A 'Set Value Dialog' is open over this parameter. The dialog has fields for 'Dec:' (4000), 'Hex:' (0x0FA0), 'Float:', 'Bool:' (0 and 1 buttons), 'Binary:' (A0 0F), and 'Bit Size:' (radio buttons for 1, 8, 16, 32, 64, and ?). The '16' bit size is selected. There are 'OK' and 'Cancel' buttons.

Fig. 8: Setting the DPO Settings Ch. 1 with EtherCAT connection

If the EtherCAT connection has been disconnected, the option "Show Offline Data" should be enabled. The default values of the respective parameters are thus displayed.

5.3 Protective functions

Protective functions protect against overload and malfunctions by switching off individual output voltages in case of error.

They signal warnings and errors: Warning and error messages [► 50].

Resetting an error state

If a protective function has signaled an error, you must reset the error state so that the switched-off supply voltages can be switched on again:

1. Eliminate the cause of the error.
2. Apply a positive edge to the output variable:
"DPO Outputs Device" > "Global Reset".

Note: The designation "Reset" refers only to the error state. Parameters and settings remain unchanged.


Further information can be found in the sections "Resetting an error state" in the chapter for the individual protective functions.

5.3.1 Overload protection

Each supply voltage output has overload protection for the output voltages U_s and U_p . If an output voltage is switched off due to overload, all other output voltages remain switched on.

The overload protection comprises two protection mechanisms:

- Overload switch-off, configurable
- Current limitation, not configurable

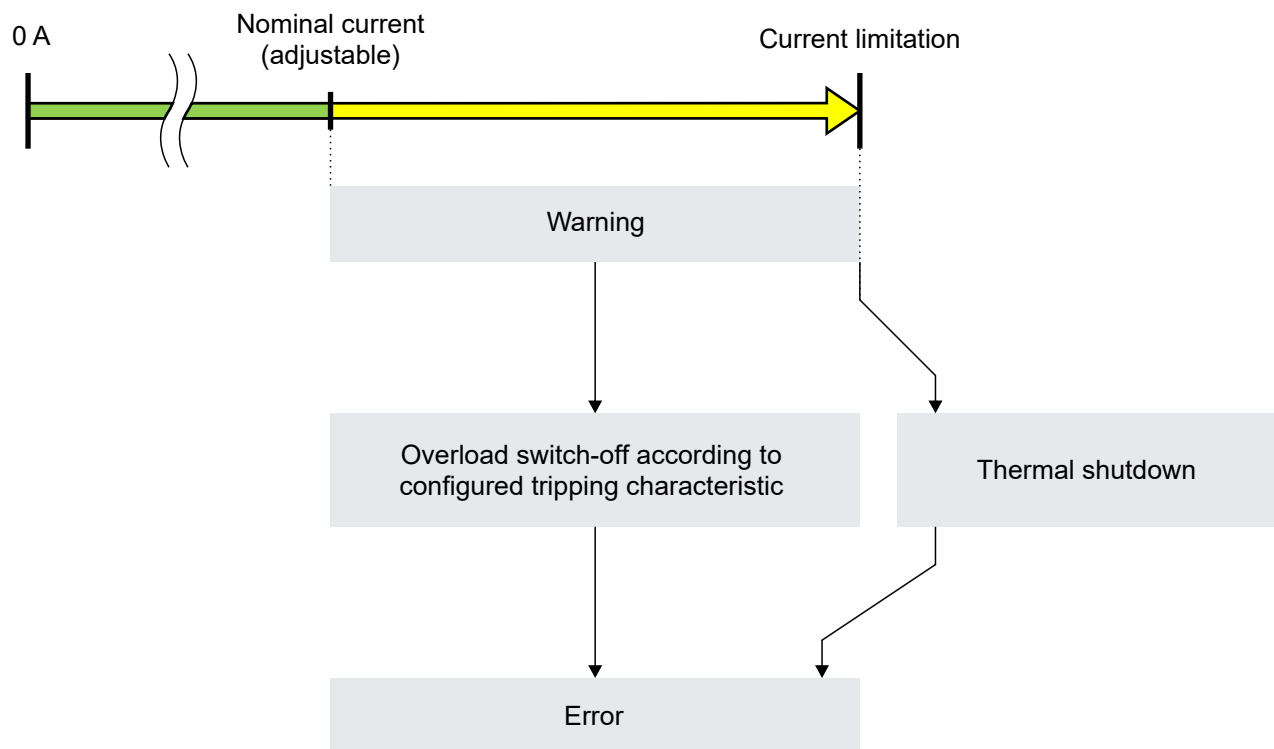

	EP92x4-0023 HW 16 and higher	EP92x4-0023 HW 15 and lower	EP92x4-0024
Nominal current (default)	4.0 A	4.0 A	4.0 A
Current limitation	4.4 A	7.0 A	4.4 A
Thermal switch-off time	typ. 160 ms	typ. 50 ms	typ. 160 ms

Above the set nominal current, the status bit "Warning" is set. In this range, the protection mechanisms are active as follows:

- If the output current is between the nominal current and the current limit, only the overload switch-off is active. It switches off the respective output voltage according to the configured tripping characteristic. See chapter [Configure overload switch-off](#) [► 46].
- When the output current reaches the current limit, overload switch-off and current limitation are active simultaneously.
The output voltage is either switched off by the overload switch-off according to the switch-off characteristic or, in the event of thermal overload, by the starting current limitation; depending on which mechanism triggers first. The switch-off time of the current limitation depends on the ambient conditions.

You can use the data logger to determine which of the two protection mechanisms has switched off an output voltage. See chapter [Troubleshooting with the data logger](#) [► 53].

Overload message

If the overload protection has switched off an output voltage, this is reported as follows:

- The status bit "Error Us" or "Error Up" of the channel is set.
- The output voltage status LED of the channel lights up red.

Resetting an error state

If an output voltage has been switched off by the overload protection, it can be enabled again by one of the following actions:

- a positive edge at the output variable "DPO Inputs Channel n" > "Reset Ux" of the respective channel
- a positive edge on the output variable "DPO Outputs Device" > "Global Reset"
- Reset contact, see chapter [Monitoring and reset contacts](#) [► 39].

A reset is possible every 20 s at most. Faster successive edges are ignored.

This also resets the status bit "Error Us" or "Error Up".

5.3.1.1 Configure overload switch-off

You can configure the overload switch-off for each output voltage individually.

The configuration of the overload switch-off is similar to the selection of a fuse: you select the nominal current and the tripping characteristic.

The nominal current can be set between 1000 and 4000 mA.

Connection	Nominal current in mA	Tripping characteristic
1	8000:12 „Nominal Current Us“ 8000:13 „Nominal Current Up“	8000:11 „Characteristic“
2	8010:12 „Nominal Current Us“ 8010:13 „Nominal Current Up“	8010:11 „Characteristic“
3	8020:12 „Nominal Current Us“ 8020:13 „Nominal Current Up“	8020:11 „Characteristic“
4	8030:12 „Nominal Current Us“ 8030:13 „Nominal Current Up“	8030:11 „Characteristic“

If the nominal current is exceeded, the status bit "Warning" is set.

Examples of maximum switch-off times

The following table shows the maximum switch-off time of the overload switch-off for different currents and tripping characteristics.



Shorter switch-off time with current limitation

The switch-off times shown only apply to output currents below the current limit.

If the current limitation is active, the output may be switched off earlier than the configured switch-off time.

EP92x4-0023 from firmware 20 and EP92x4-0024:

% of the nominal current	Very fast acting	Fast acting	Slow acting	Time delay
105 %	3600 s	3600 s	3600 s	3600 s
135 %	420 s	3600 s	3600 s	3600 s
200 %	0.5 s	20 s	20 s	100 s
300 %	0.02 s	0.1 s	1 s	3 s

EP92x4-0023 with firmware below 20:

Nominal current	Very fast acting	Fast acting	Slow acting	Time delay
100 %	1 h	-	-	-
110 %	1 h	4 h	-	-
120 %	7 min	4 h	-	-
150 %	30 s	30 min	1 h	4 h
210 %	500 ms	20 s	20 s	100 s
275 %	500 ms	1 s	20 s	10 s
300 %	20 ms	100 ms	1 s	3 s

5.3.2 Overcurrent protection for sum currents

EP92x4-002x determines two types of sum currents:

- Sum current for each individual output (calculated)
 $U_S + U_P$
- Sum current for all outputs (measured)
 $\sum (U_S + U_P)$

The overcurrent protection for sum currents is disabled in the factory settings. It can be individually activated and parameterized for each sum current:

Sum current	CoE indices		
	Activation „Enable Sum Current Limitation“	Nominal current „Nominal Sum Current“	Tripping characteristic „Sum Current Charac- teristic“
Channel 1: $U_S + U_P$	8000:04	8000:14	8000:11
Channel 2: $U_S + U_P$	8010:04	8010:14	8010:11
Channel 3: $U_S + U_P$	8020:04	8020:14	8020:11
Channel 4: $U_S + U_P$	8030:04	8030:14	8030:11
$\sum (U_S + U_P)$ (Sum of all output currents)	F80E:02	F80E:12	F80E:13

5.3.3 Undervoltage protection

The undervoltage protection prevents connected devices from being operated with a supply voltage that is too low. A malfunction of the devices due to undervoltage is thus impossible.

Threshold values

The undervoltage protection has two threshold values, see chapter [Technical data \[► 18\]](#):

- U_{warn} : If a supply voltage U_S or U_P falls below the upper threshold value U_{warn} , the bit "Warning U_S " or "Warning U_P " in the process data object "DPO Inputs Device" is set.
- U_{err} : If a supply voltage falls below the lower threshold value U_{err} , all outputs are switched off and the bit "Error U_S " or "Error U_P " in the process data object "DPO Inputs Device" is set.

The threshold values of the undervoltage protection cannot be adjusted.

Resetting an error state

If the output voltages have been switched off by the undervoltage protection, they can be re-activated in two ways:

- a positive edge on the output variable
„DPO Inputs Device“ > „Global Reset“.
- A voltage reset of U_S

Requirement: Both supply voltages are higher at this point in time than the upper threshold value U_{warn} .

5.3.4 Overtemperature protection

The overtemperature protection monitors the internal temperature.

It has two threshold values, see chapter [Technical data \[► 18\]](#):

- T_{warn} : If the internal temperature exceeds T_{warn} , the bit "Warning Temperature" in the process data object "DPO Inputs Device" is set.
- T_{err} : If the internal temperature exceeds T_{err} , all output voltages are switched off and the bit "Error Temperature" in the process data object "DPO Inputs Device" is set.

Resetting an error state

1. Allow the box to cool down until the internal temperature has fallen below T_{warn} .
 2. Apply a positive edge on the output variable
„DPO Outputs Device“ > „Global Reset“.
- ⇒ The error message is reset.
- ⇒ All output voltages are switched on again, provided no other protective function prevents this.

5.3.5 Warning and error messages

The protective functions output warning and error messages.

Warning messages are temporary. They indicate that a measured variable lies outside of the nominal operating range. The warning message is canceled if the measured variable returns to within the nominal operating range.

Error messages are persistent. They persist until they are actively reset: [Resetting an error state \[► 44\]](#).

They also persist after a voltage reset (U_S).

A protective function signals through an error message that it has switched off at least one output voltage.

Warning messages and error messages are signaled in two ways:

- Status LEDs
- Status bits in the process data

Use the Status bits to narrow down the cause of warnings or errors.

Status bits for group errors

- "Global Error Bit"
(input variable 'DPO Inputs Device' > 'Device Status').
This status bit is set for every error message. If it is not set, there is no error message from any protective function.
- "Channel Error"
(input variables "DPO Inputs Channel n" > "Status").
These status bits are set for every error message that affects the respective output.

Global status bits

Input variable: "DPO Inputs Device" > "Device Status":

Status bit	Responsible protective function
Warning Temperature	Overtemperature protection [► 49]
Error Temperature	
Warning U_S	Undervoltage protection [► 49]
Error U_S	
Warning U_P	
Error U_P	
Warning Sum Current	Overcurrent protection for sum currents [► 48]
Error Sum Current	

Status bits per supply voltage output

Input variable: "DPO Inputs Channel n" > "Status"

(n = 0 for channel 1, n = 1 for channel 2, n = 2 for channel 3, n = 3 for channel 4)

Status bit	Responsible protective function
Error U_S	Overload protection [► 45]
Error U_P	
Warning U_S	
Warning U_P	
Error Sum Current	Overcurrent protection for sum currents [► 48]
Warning Sum Current	

5.4 Diagnostic functions, EP9224-002x only

5.4.1 Data logger

The data logger enables the recording of measured values. The recording can be used for the analysis of errors. See also Chapter [Troubleshooting with the data logger](#) [► 53].

Once the recording has been started, it saves all measured values continuously in a ring buffer. The recording stops automatically if a protective function signals an error. With the recorded measured values you can trace the events that led to the error.

Activate control

You have to activate additional process data objects in the process image in order to be able to use the data logger:

- PDO 0x1610 (Sync Manager SM2 "Outputs")
- PDO 0x1A10 (Sync Manager SM3 "Inputs")

Proceed as follows:

- ✓ Requirement: an EP92x4-002x is added to Solution Explorer under the "I/O" entry.
- 1. Double-click EP92x4-002x.
- 2. Click the **Process Data** tab.
- 3. In the field **Sync Manager**, click on the "Outputs" entry.
- 4. In the field **PDO Assignment (0x1C12)**, check the entry "0x1610".
 - ⇒ The process data object "LOG Control" appears in the Solution Explorer.
- 5. In the field **Sync Manager**, click on the "Inputs" entry.
- 6. In the field **PDO Assignment (0x1C13)**, check the entry "0x1A10".
 - ⇒ The process data object "LOG Status" appears in the Solution Explorer.
- ⇒ Result: The process data objects for controlling the data logger are activated.

Parameterization

The sampling rate for the recording can be selected in the index 8040:11 "Sampling Rate".

Start recording

The output variable "Start Logger" is located in the process data object "LOG Control". The recording is started by a positive edge on this output variable.

If the recording is running, the Status bit
"LOG Status" > "Status" > "Logger Running"
is set.

Stop recording

The recording stops in two cases:

- if a protective function signals an error.
- upon a positive edge on the output variable
"LOG Control" > "Control" > "Stop Logger".

If the recording has stopped, the input variable
"LOG Status" > "Status" > "Logger Running"
has the value "0".

Evaluate recorded measured values

The recorded measured values are available as a .csv file. The file must be uploaded from the box to the control computer in order to be able to evaluate it.

Proceed as follows to upload the recorded measured values to the control computer:

1. Double-click on EP9224-002x in Solution Explorer under the entry "I/O".
2. Click on the **Online** tab.
3. Click on the **Upload** button.
 - ⇒ A dialog box with the title "Save As" appears.
4. Select a directory and enter "logdata.csv" in the field **Filename**.
5. Click on the **Save** button.
 - ⇒ A dialog box with the title "Edit FoE Name" appears.
6. Click on the **OK** button.
 - ⇒ The file with the measured values was uploaded to the control computer.

File format

The file with the measured values begins with a header „**** Logfile from Ethercat Slave ****".

Below this follows:

- a file header
- a measured value table

Format of the file header:

Field	Description
Device Name	Name of the module
File Version	Version number (Note: when importing from EXCEL the version, e.g. 1.5, is interpreted/displayed as a date (1st May))
Reason for which the snapshot was taken	Reason for stopping the data logger
Age of snapshot	time elapsed from stopping the data logger until the upload
System timestamp (0 if DC not supported)	current timestamp when uploading

Format of the measured value table:

Type	Description
Time offset additional to snapshot age	The age of the measured values in the row in relation to the stopping of the data logger (0 = stop, > 0 older values) in ms
I(U...)	present current values of the channels Us / Up 1 - 4 in 100 mA
Internal Temperature	internal module temperature in °C
Us / Up	Input voltage Us and Up at the 7/8" input in V
Sum Current Us / Up	Sum current of Us and Up in A
I²t(U...)	virtual overload, incremented or decremented depending on the nominal current <ul style="list-style-type: none"> • from 10% warning • at 100% shut-off

5.4.1.1 Troubleshooting with the data logger

You can use the data logger to determine the cause of an error, among other things. The prerequisite for this is that the recording of the measured values is already enabled when the error occurs.

Determine the cause of the error

The data logger stops recording the measured values if an error occurs, among other things. The reason for the last stop of the recording is output in the process data and via a CoE parameter:

- PDO "Log Status" > "Trigger Reason"
- CoE parameter 6040:12 "Trigger Reason"

Possible values:

Value	Enum text	Reason for stopping the recording
0	Undefined	Unknown.
1	Undervoltage U_s	Undervoltage of U_s .
2	Undervoltage U_p	Undervoltage of U_p .
3	Overtemperature	Internal temperature too high.
4	Overcurrent	The overload switch-off has switched off an output voltage.
5	FoE Transfer	The data upload was started before the recording was stopped.
6	Hardware Protection	Thermal shutdown of an output voltage after current limitation.
7	User Stop Bit	Set the bit "Stop Logger" in the process data.
255	Logger still running	N/A. The recording has not yet been stopped.


5.4.2 Peak value detector

The peak value detector detects two types of event:

- Occurrence of an extreme value of a measured variable (output current, supply voltage, temperature).
- Output of a warning message or error message.

The value of the maximum extreme value and the time of occurrence in input variables are available at all times.

The following diagrams illustrate the mode of operation of the peak value detector taking the example of the maximum of a measured variable:

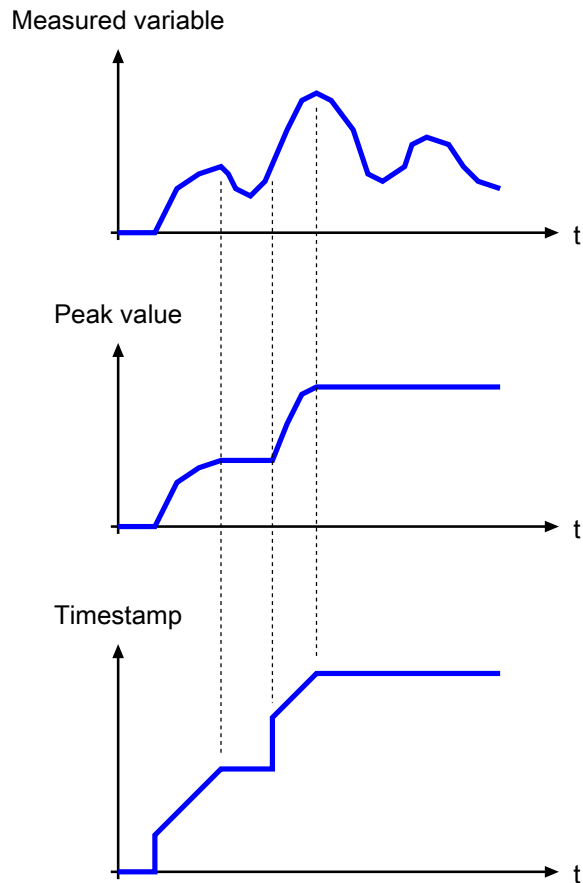

Activate peak value detector

You have to activate additional process data objects in the process image in order to be able to use the peak value detector:

Scope	Process data objects for control		Process data objects for evaluation	
	Index (Sync Manager SM2)	Name	Index (Sync Manager SM3)	Name
Output 1	0x1601	DPO Extended Diag Outputs Channel 1	0x1A01	DPO Extended Diag Inputs Channel 1
Output 2	0x1603	DPO Extended Diag Outputs Channel 2	0x1A03	DPO Extended Diag Inputs Channel 2
Output 3	0x1605	DPO Extended Diag Outputs Channel 3	0x1A05	DPO Extended Diag Inputs Channel 3
Output 4	0x1607	DPO Extended Diag Outputs Channel 4	0x1A07	DPO Extended Diag Inputs Channel 4
Global	0x1609	DPO Extended Diag Outputs Device	0x1A09	DPO Extended Diag Inputs Device

Proceed as follows:

1. Double-click on EP9224-002x in Solution Explorer under the entry "I/O".
 2. Select the **Process Data** tab.
 3. In the field **Sync Manager**, click on the "Outputs" entry.
 4. In the field **PDO Assignment (0x1C12)**, check the desired PDOs.
 - ⇒ The corresponding process data object "DPO Extended Diag Outputs [...]" appears in Solution Explorer.
 5. In the field **Sync Manager**, click on the "Inputs" entry.
 6. In the field **PDO Assignment (0x1C13)**, check the desired PDOs.
 - ⇒ The corresponding process data object "DPO Extended Diag Inputs [...]" appears in Solution Explorer.
- ⇒ Result: The process data objects for controlling and evaluating the peak value detector are activated.

Select measured variables/messages

You can select ten measured variables or messages for which events are to be detected:

- Two measured variables or messages per output.
- Two global measured variables or messages that concern the complete box (temperatures, supply voltages, sum currents).

The following table shows the CoE indices in which the measured variables or messages can be selected:

Scope	Input variables	CoE Index
Output 1	„DPO Extended Diag Inputs Channel 1“ > „Peak Value 1“ > „Timestamp 1“	8000:15
	„DPO Extended Diag Inputs Channel 1“ > „Peak Value 2“ > „Timestamp 2“	8000:16
Output 2	„DPO Extended Diag Inputs Channel 2“ > „Peak Value 1“ > „Timestamp 1“	8010:15
	„DPO Extended Diag Inputs Channel 2“ > „Peak Value 2“ > „Timestamp 2“	8010:16
Output 3	„DPO Extended Diag Inputs Channel 3“ > „Peak Value 1“ > „Timestamp 1“	8020:15
	„DPO Extended Diag Inputs Channel 3“ > „Peak Value 2“ > „Timestamp 2“	8020:16
Output 4	„DPO Extended Diag Inputs Channel 4“ > „Peak Value 1“ > „Timestamp 1“	8030:15
	„DPO Extended Diag Inputs Channel 4“ > „Peak Value 2“ > „Timestamp 2“	8030:16
Global	„DPO Extended Diag Inputs Device“ > „Peak Value 1“ > „Timestamp 1“	F80E:15
	„DPO Extended Diag Inputs Device“ > „Peak Value 2“ > „Timestamp 2“	F80E:16

Reset

Resetting the peak value detector leads to the current measured value and the current timestamp being adopted as the new peak value and new timestamp.

You can reset the peak value detector for each port and for the global peak values individually.

To do this, apply a positive edge to the respective output variable "Reset Extended Diag Data".

Evaluation

The peak values and timestamp can be found in the process data objects "DPO Extended Diag Inputs" as input variables:

- "Peak Value 1" and the associate "Timestamp 1"
- "Peak Value 2" and the associate "Timestamp 2"

5.5 Switch output voltages

You can switch the output voltages U_S and U_P of each output individually.

Protective functions [► 44] can prevent an output voltage from being switched on.

A switched-on output voltage is signaled in two ways:

- Status LEDs.
- Status bits in the process data:
 - "DPO Inputs Channel n" > "Status" > "Status Us"
 - "DPO Inputs Channel n" > "Status" > "Status Up"
 (with: n = 0 for channel 1, n = 1 for channel 2, n = 2 for channel 3, n = 3 for channel 4)

The output variable "DPO Outputs Device" > "Enable Control Via Fieldbus" determines whether the output voltages are switched automatically or manually:

- "0": automatic (factory setting)
- "1": manual

● Inadvertent switching of output voltages.

I If you change the value of "Enable Control Via Fieldbus", it can happen that output voltages are switched on or off.
To prevent this, match the values of the CoE indices (automatic switching) and output variables (manual switching) mentioned below before changing the value of "Enable Control Via Fieldbus".

Automatic switching

In the factory setting, all output voltages are switched on automatically when the supply voltage U_S is applied. You can activate or deactivate automatic switch-on for each output voltage individually.

The following table shows the correlation of the output voltages and the CoE indices that control the automatic switch-on.

Connection	Output voltage	Parameter	
1	U_S	8000:02	"DPO Settings Ch. 1" > "Default State Us"
	U_P	8000:03	"DPO Settings Ch. 1" > "Default State Up"
2	U_S	8010:02	"DPO Settings Ch. 2" > "Default State Us"
	U_P	8010:03	"DPO Settings Ch. 2" > "Default State Up"
3	U_S	8020:02	"DPO Settings Ch. 3" > "Default State Us"
	U_P	8020:03	"DPO Settings Ch. 3" > "Default State Up"
4	U_S	8030:02	"DPO Settings Ch. 4" > "Default State Us"
	U_P	8030:03	"DPO Settings Ch. 4" > "Default State Up"

Value range:

- "1": U_S/U_P is switched on automatically when U_S is applied (factory setting).
- "0": U_S/U_P remains switched off when U_S is applied.

The output voltages are switched on with a time offset. The time offset prevents the input inrush currents of the connected devices from adding up.

You can set the time offset in CoE index F80E:11 "Startup Delay":

- "0": "Fast"
- "1": "Moderate"
- "2": "Slow"

Manual switching


Set the variable "Enable Control Via Fieldbus" to "1" to be able to switch the output voltages manually via output variables.

Connection	Output voltage	Output variable
1	U _S	"DPO Outputs Channel 1" > "Output Us"
	U _P	"DPO Outputs Channel 1" > "Output Up"
2	U _S	"DPO Outputs Channel 2" > "Output Us"
	U _P	"DPO Outputs Channel 2" > "Output Up"
3	U _S	"DPO Outputs Channel 3" > "Output Us"
	U _P	"DPO Outputs Channel 3" > "Output Up"
4	U _S	"DPO Outputs Channel 4" > "Output Us"
	U _P	"DPO Outputs Channel 4" > "Output Up"


5.6 Restore the delivery state

You can restore the delivery state of the backup objects as follows:

1. Ensure that TwinCAT is running in Config mode.
2. In CoE object 1011:0 "Restore default parameters" select parameter 1011:01 "Subindex 001".

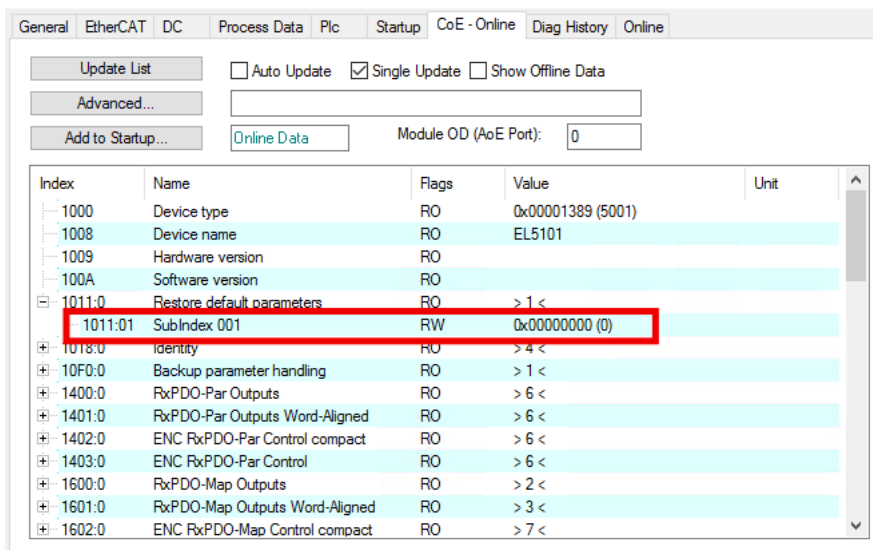

3. Double-click on "Subindex 001".
⇒ The "Set Value Dialog" dialog box opens.
4. Enter the value 1684107116 in the "Dec" field.
Alternatively: enter the value 0x64616F6C in the "Hex" field.

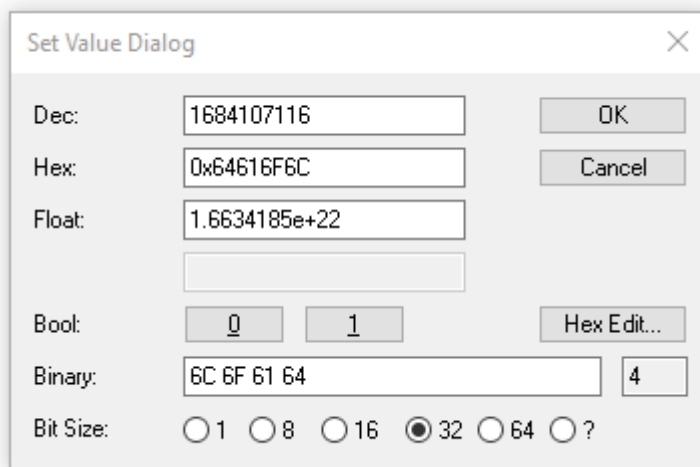

5. Confirm with "OK".
⇒ All backup objects are reset to the delivery state.

● Alternative restore value

With some older modules the backup objects can be changed with an alternative restore value:

Decimal value: 1819238756

Hexadecimal value: 0x6C6F6164

An incorrect entry for the restore value has no effect.

6 CoE parameters



Parameterization

You can parameterize the box via the "CoE - Online" tab in TwinCAT.



EtherCAT XML Device Description

The presentation matches that of the EtherCAT XML Device Description.

Recommendation: download the latest XML file from <https://www.beckhoff.com> and install it according to the installation instructions.

EP9214-0023, EP9214-0024

Index (hex)	Name
1000	Device type [► 74]
1008	Device name [► 74]
1009	Hardware version [► 74]
100A	Software version [► 74]
100B	Bootloader version [► 74]
1011	Restore default parameters [► 63]
1018	Identity [► 75]
10F0	Backup parameter handling [► 75]
1600	DPO RxPDO-Map Outputs Ch.1 [► 75]
1601	DPO RxPDO-Map Outputs Ch.2 [► 76]
1602	DPO RxPDO-Map Outputs Ch.3 [► 76]
1603	DPO RxPDO-Map Outputs Ch.4 [► 77]
1604	DPO RxPDO-Map Outputs Device [► 77]
1A00	DPO TxPDO-Map Inputs Ch.1 [► 79]
1A01	DPO TxPDO-Map Inputs Ch.2 [► 79]
1A02	DPO TxPDO-Map Inputs Ch.3 [► 81]
1A03	DPO TxPDO-Map Inputs Ch.4 [► 83]
1A04	DPO TxPDO-Map Inputs Device [► 84]
1C00	Sync manager type [► 88]
1C12	RxPDO assign [► 88]
1C13	TxPDO assign [► 89]
1C32	SM output parameter [► 90]
1C33	SM input parameter [► 91]
6000	DPO Inputs Ch.1 [► 93]
6010	DPO Inputs Ch.2 [► 93]
6020	DPO Inputs Ch.3 [► 94]
6030	DPO Inputs Ch.4 [► 95]
7000	DPO Outputs Ch.1 [► 95]
7010	DPO Outputs Ch.2 [► 96]
7020	DPO Outputs Ch.3 [► 96]
7030	DPO Outputs Ch.4 [► 96]
8000	DPO Settings Ch.1 [► 63]
800F	DPO Vendor Data Ch.1 [► 64]
8010	DPO Settings Ch.2 [► 65]
801F	DPO Vendor Data Ch.2 [► 66]
8020	DPO Settings Ch.3 [► 67]
802F	DPO Vendor Data Ch.3 [► 68]
8030	DPO Settings Ch.4 [► 69]
803F	DPO Vendor Data Ch.4 [► 70]
F000	Modular Device Profile [► 91]
F008	Code word [► 91]
F010	Module Profile List [► 92]
F607	DPO Inputs Device [► 98]
F707	DPO Outputs Device [► 99]
F80E	DPO Settings Device [► 71]
F81F	DPO Vendor Data Device [► 73]

EP9224-0023, EP9224-0024

Index (hex)	Name
1000	Device type [► 74]
1008	Device name [► 74]
1009	Hardware version [► 74]
100A	Software version [► 74]
100B	Bootloader version [► 74]
1011	Restore default parameters [► 63]
1018	Identity [► 75]
10F0	Backup parameter handling [► 75]
1600	DPO RxPDO-Map Outputs Ch.1 [► 75]
1601	DPO RxPDO-Map Extended Diag Outputs Ch.1 [► 76]
1602	DPO RxPDO-Map Outputs Ch.2 [► 76]
1603	DPO RxPDO-Map Extended Diag Outputs Ch.2 [► 77]
1604	DPO RxPDO-Map Outputs Ch.3 [► 77]
1605	DPO RxPDO-Map Extended Diag Outputs Ch.3 [► 78]
1606	DPO RxPDO-Map Outputs Ch.4 [► 78]
1607	DPO RxPDO-Map Extended Diag Outputs Ch.4 [► 78]
1608	DPO RxPDO-Map Outputs Device [► 78]
1609	DPO RxPDO-Map Extended Diag Outputs Device [► 78]
1610	LOG RxPDO-Map Control [► 79]
1A00	DPO TxPDO-Map Inputs Ch.1 [► 79]
1A01	DPO TxPDO-Map Extended Diag Inputs Ch.1 [► 80]
1A02	DPO TxPDO-Map Inputs Ch.2 [► 82]
1A03	DPO TxPDO-Map Extended Diag Inputs Ch.2 [► 83]
1A04	DPO TxPDO-Map Inputs Ch.3 [► 85]
1A05	DPO TxPDO-Map Extended Diag Inputs Ch.3 [► 85]
1A06	DPO TxPDO-Map Inputs Ch.4 [► 86]
1A07	DPO TxPDO-Map Extended Diag Inputs Ch.4 [► 86]
1A08	DPO TxPDO-Map Inputs Device [► 87]
1A09	DPO TxPDO-Map Extended Diag Inputs Device [► 87]
1A10	LOG TxPDO-Map Status [► 87]
1C00	Sync manager type [► 88]
1C12	RxPDO assign [► 88]
1C13	TxPDO assign [► 89]
1C32	SM output parameter [► 90]
1C33	SM input parameter [► 91]
6000	DPO Inputs Ch.1 [► 93]
6010	DPO Inputs Ch.2 [► 94]
6020	DPO Inputs Ch.3 [► 94]
6030	DPO Inputs Ch.4 [► 95]
6040	LOG Status [► 95]
7000	DPO Outputs Ch.1 [► 96]
7010	DPO Outputs Ch.2 [► 96]
7020	DPO Outputs Ch.3 [► 96]
7030	DPO Outputs Ch.4 [► 97]
7040	LOG Control [► 97]
8000	DPO Settings Ch.1 [► 64]
800F	DPO Vendor Data Ch.1 [► 64]
8010	DPO Settings Ch.2 [► 66]
801F	DPO Vendor Data Ch.2 [► 66]
8020	DPO Settings Ch.3 [► 68]

Index (hex)	Name
802F	DPO Vendor Data Ch.3 [► 68]
8030	DPO Settings Ch.4 [► 70]
803F	DPO Vendor Data Ch.4 [► 70]
8040	LOG Settings [► 71]
F000	Modular Device Profile [► 91]
F008	Code word [► 91]
F010	Module Profile List [► 92]
F607	DPO Inputs Device [► 99]
F707	DPO Outputs Device [► 99]
F80E	DPO Settings Device [► 72]
F81F	DPO Vendor Data Device [► 73]

6.1 Objects for parameterization

Index 1011 Restore default parameters

Index (hex)	Name	Meaning	Data type	Flags	Default
1011:0	Restore default parameters	Restore default parameters	UINT8	RO	0x01 (1 _{dec})
1011:01	SubIndex 001	If this object is set to "0x64616F6C" in the set value dialog, all backup objects are reset to their delivery state.	UINT32	RW	0x00000000 (0 _{dec})

Index 8000 DPO Settings Ch.1 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8000:0	DPO Settings Ch.1		UINT8	RO	0x16 (22 _{dec})
8000:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57] .	BOOLEAN	RW	0x01 (1 _{dec})
8000:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57] .	BOOLEAN	RW	0x01 (1 _{dec})
8000:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> 0: Very fast acting 1: Fast acting 2: Slow acting 3: Time delay See chapter Overload protection [► 45] .	UINT16	RW	0x0001 (1 _{dec})
8000:12	Nominal Current Us	Nominal current for U _s . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45] .	UINT16	RW	0x0BB8 (4000 _{dec})
8000:13	Nominal Current Up	Nominal current for U _p . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45] .	UINT16	RW	0x0BB8 (4000 _{dec})

Index 8000 DPO Settings Ch.1 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8000:0	DPO Settings Ch.1		UINT8	RO	0x16 (22 _{dec})
8000:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8000:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8000:04	Enable Sum Current Limitation	Activates the overcurrent protection for the sum current Us+Up on this output. See chapter Overcurrent protection for sum currents [► 48].	BOOLEAN	RW	0x00 (0 _{dec})
8000:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay See chapter Overload protection [► 45].	UINT16	RW	0x0001 (1 _{dec})
8000:12	Nominal Current Us	Nominal current for U _s . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8000:13	Nominal Current Up	Nominal current for U _p . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8000:14	Nominal Sum Current	Nominal maximum sum current (Us+Up) at the output. See chapter Overcurrent protection for sum currents [► 48].	UINT16	RW	0x1770 (8000 _{dec})
8000:15	Timestamp 1 Trigger	Defines which events are detected by the peak value detector at this port. Possible values: <ul style="list-style-type: none"> • 0: Error Us • 1: Error Up • 2: Warning Us • 3: Warning Up • 7: Error Sum Current • 8: Warning Sum Current • 16: Minimum Current Us • 17: Maximum Current Us • 18: Minimum Current Up • 19: Maximum Current Up See chapter Peak value detector [► 54].	UINT16	RW	0x0000 (0 _{dec})
8000:16	Timestamp 2 Trigger	See 8000:15.	UINT16	RW	0x0000 (0 _{dec})

800F DPO Vendor Data Ch.1

Index (hex)	Name	Meaning	Data type	Flags	Default
800F:0	DPO Vendor Data Ch.1		USINT	RO	0x14 (20 _{dec})
800F:11	GainS		UINT	RW	0x4000 (16384 _{dec})
800F:12	OffsetS		INT	RW	0x0 (0 _{dec})
800F:13	GainP		UINT	RW	0x4000 (16384 _{dec})
800F:14	OffsetP		INT	RW	0x0 (0 _{dec})

Index 8010 DPO Settings Ch.2 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8010:0	DPO Settings Ch.2		UINT8	RO	0x16 (22 _{dec})
8010:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8010:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8010:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay See chapter Overload protection [► 45].	UINT16	RW	0x0001 (1 _{dec})
8010:12	Nominal Current Us	Nominal current for U _S . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8010:13	Nominal Current Up	Nominal current for U _P . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})

Index 8010 DPO Settings Ch.2 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8010:0	DPO Settings Ch.2		UINT8	RO	0x16 (22 _{dec})
8010:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8010:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8010:04	Enable Sum Current Limitation	Activates the overcurrent protection for the sum current Us+Up on this output. See chapter Overcurrent protection for sum currents [► 48].	BOOLEAN	RW	0x00 (0 _{dec})
8010:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay See chapter Overload protection [► 45].	UINT16	RW	0x0001 (1 _{dec})
8010:12	Nominal Current Us	Nominal current for U _s . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8010:13	Nominal Current Up	Nominal current for U _p . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8010:14	Nominal Sum Current	Nominal maximum sum current (Us+Up) at the output. See chapter Overcurrent protection for sum currents [► 48].	UINT16	RW	0x1770 (8000 _{dec})
8010:15	Timestamp 1 Trigger	Defines which events are detected by the peak value detector at this port. Possible values: <ul style="list-style-type: none"> • 0: Error Us • 1: Error Up • 2: Warning Us • 3: Warning Up • 7: Error Sum Current • 8: Warning Sum Current • 16: Minimum Current Us • 17: Maximum Current Us • 18: Minimum Current Up • 19: Maximum Current Up See chapter Peak value detector [► 54].	UINT16	RW	0x0000 (0 _{dec})
8010:16	Timestamp 2 Trigger	See 8010:15.	UINT16	RW	0x0000 (0 _{dec})

801F DPO Vendor Data Ch.2

Index (hex)	Name	Meaning	Data type	Flags	Default
801F:0	DPO Vendor Data Ch.2		USINT	RO	0x14 (20 _{dec})
801F:11	GainS		UINT	RW	0x4000 (16384 _{dec})
801F:12	OffsetS		INT	RW	0x0 (0 _{dec})
801F:13	GainP		UINT	RW	0x4000 (16384 _{dec})
801F:14	OffsetP		INT	RW	0x0 (0 _{dec})

Index 8020 DPO Settings Ch.3 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8020:0	DPO Settings Ch.3		UINT8	RO	0x16 (22 _{dec})
8020:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8020:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8020:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay See chapter Overload protection [► 45].	UINT16	RW	0x0001 (1 _{dec})
8020:12	Nominal Current Us	Nominal current for U _S . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8020:13	Nominal Current Up	Nominal current for U _P . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})

Index 8020 DPO Settings Ch.3 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8020:0	DPO Settings Ch.3		UINT8	RO	0x16 (22 _{dec})
8020:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8020:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8020:04	Enable Sum Current Limitation	Activates the overcurrent protection for the sum current Us+Up on this output. See chapter Overcurrent protection for sum currents [► 48].	BOOLEAN	RW	0x00 (0 _{dec})
8020:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay See chapter Overload protection [► 45].	UINT16	RW	0x0001 (1 _{dec})
8020:12	Nominal Current Us	Nominal current for U _s . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8020:13	Nominal Current Up	Nominal current for U _p . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8020:14	Nominal Sum Current	Nominal maximum sum current (Us+Up) at the output. See chapter Overcurrent protection for sum currents [► 48].	UINT16	RW	0x1770 (8000 _{dec})
8020:15	Timestamp 1 Trigger	Defines which events are detected by the peak value detector at this port. Possible values: <ul style="list-style-type: none"> • 0: Error Us • 1: Error Up • 2: Warning Us • 3: Warning Up • 7: Error Sum Current • 8: Warning Sum Current • 16: Minimum Current Us • 17: Maximum Current Us • 18: Minimum Current Up • 19: Maximum Current Up See chapter Peak value detector [► 54].	UINT16	RW	0x0000 (0 _{dec})
8020:16	Timestamp 2 Trigger	See 8020:15	UINT16	RW	0x0000 (0 _{dec})

802F DPO Vendor Data Ch.3

Index (hex)	Name	Meaning	Data type	Flags	Default
802F:0	DPO Vendor Data Ch.3		USINT	RO	0x14 (20 _{dec})
802F:11	GainS		UINT	RW	0x4000 (16384 _{dec})
802F:12	OffsetS		INT	RW	0x0 (0 _{dec})
802F:13	GainP		UINT	RW	0x4000 (16384 _{dec})
802F:14	OffsetP		INT	RW	0x0 (0 _{dec})

Index 8030 DPO Settings Ch.4 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8030:0	DPO Settings Ch.4		UINT8	RO	0x16 (22 _{dec})
8030:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8030:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8030:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay See chapter Overload protection [► 45].	UINT16	RW	0x0001 (1 _{dec})
8030:12	Nominal Current Us	Nominal current for U _S . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8030:13	Nominal Current Up	Nominal current for U _P . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})

Index 8030 DPO Settings Ch.4 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8030:0	DPO Settings Ch.4		UINT8	RO	0x16 (22 _{dec})
8030:02	Default State Us	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8030:03	Default State Up	If F707:01 "Enable Control Via Fieldbus" is not set, the output assumes this value. See chapter Switch output voltages [► 57].	BOOLEAN	RW	0x01 (1 _{dec})
8030:04	Enable Sum Current Limitation	Activates the overcurrent protection for the sum current Us+Up on this output. See chapter Overcurrent protection for sum currents [► 48].	BOOLEAN	RW	0x00 (0 _{dec})
8030:11	Characteristic	Tripping characteristics of the overload switch-off: <ul style="list-style-type: none"> • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay See chapter Overload protection [► 45].	UINT16	RW	0x0001 (1 _{dec})
8030:12	Nominal Current Us	Nominal current for U _s . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8030:13	Nominal Current Up	Nominal current for U _p . Unit: mA Value range: 1000 ... 4000 _{dec} See chapter Overload protection [► 45].	UINT16	RW	0x0BB8 (4000 _{dec})
8030:14	Nominal Sum Current	Nominal maximum sum current (Us+Up) at the output. See chapter Overcurrent protection for sum currents [► 48].	UINT16	RW	0x1770 (8000 _{dec})
8030:15	Timestamp 1 Trigger	Defines which events are detected by the peak value detector at this port. Possible values: <ul style="list-style-type: none"> • 0: Error Us • 1: Error Up • 2: Warning Us • 3: Warning Up • 7: Error Sum Current • 8: Warning Sum Current • 16: Minimum Current Us • 17: Maximum Current Us • 18: Minimum Current Up • 19: Maximum Current Up See chapter Peak value detector [► 54].	UINT16	RW	0x0000 (0 _{dec})
8030:16	Timestamp 2 Trigger	See 8030:15	UINT16	RW	0x0000 (0 _{dec})

803F DPO Vendor Data Ch.4

Index (hex)	Name	Meaning	Data type	Flags	Default
803F:0	DPO Vendor Data Ch.4		USINT	RO	0x14 (20 _{dec})
803F:11	GainS		UINT	RW	0x4000 (16384 _{dec})
803F:12	OffsetS		INT	RW	0x0 (0 _{dec})
803F:13	GainP		UINT	RW	0x4000 (16384 _{dec})
803F:14	OffsetP		INT	RW	0x0 (0 _{dec})

Index 8040 LOG Settings (only EP9224-0023 and EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
8040:0	LOG Settings		UINT8	RO	0x11 (17 _{dec})
8040:11	Sampling Rate	Sampling rate of the data logger <ul style="list-style-type: none"> • 1: 1 ms • 10: 10 ms • 25: 25 ms • 100: 100 ms • 1000: 1000 ms See chapter Data logger [► 51].	UINT16	RW	0x000A (10 _{dec})

Index F80E DPO Settings Device (EP9214-0023 and EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
F80E:0	DPO Settings Device		UINT8	RO	0x16 (22 _{dec})
F80E:11	Startup Delay	Sets the time that is kept between two switch-on procedures: <ul style="list-style-type: none"> • 0: Fast (10 ms) • 1: Moderate (100 ms) • 2: Slow (200 ms) 	UINT16	RW	0x0001 (1 _{dec})

Index F80E DPO Settings Device (EP9224-0023 and EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
F80E:0	DPO Settings Device		UINT8	RO	0x16 (22 _{dec})
F80E:02	Enable Sum Current Limitation	Enables the overcurrent protection for the sum current $\sum U_s + \sum U_p$.	BOOLEAN	RW	0x00 (0 _{dec})
F80E:03	Automatic Restart After Uncritic Events on Us	Automatic restart after undervoltage and overtemperature: 0 _{bin} : enabled 1 _{bin} : disabled	BOOLEAN	RW	0x00 (0 _{dec})
F80E:04	Automatic Restart After Uncritic Events on Up	Automatic restart after undervoltage and overtemperature: 0 _{bin} : enabled 1 _{bin} : disabled	BOOLEAN	RW	0x00 (0 _{dec})
F80E:11	Startup Delay	Sets the time that is kept between two switch-on procedures: • 0: Fast (10 ms) • 1: Moderate (100 ms) • 2: Slow (200 ms)	UINT16	RW	0x0001 (1 _{dec})
F80E:12	Nominal Sum Current	Nominal maximum current for the sum current.	INT16	RW	0x5DC0 (24000 _{dec})
F80E:13	Sum Current Characteristic	Specifies the characteristic with which the current monitoring reacts: • 0: Very fast acting • 1: Fast acting • 2: Slow acting • 3: Time delay	UINT16	RW	0x0001 (1 _{dec})
F80E:15	Timestamp 1 Trigger	Defines which events are detected by the peak value detector. Possible values: • 0: Temperature Warning • 1: Temperature Error • 2: Us Warning • 3: Us Error • 4: Up Warning • 5: Up Error • 7: Sum Current Warning • 8: Sum Current Error • 16: Minimum Current Us • 17: Maximum Current Us • 18: Minimum Current Up • 19: Maximum Current Up • 20: Minimum Voltage Us • 21: Maximum Voltage Us • 22: Minimum Voltage Up • 23: Maximum Voltage Up • 24: Minimum Temperature • 25: Maximum Temperature See chapter Peak value detector [► 54].	UINT16	RW	0x0000 (0 _{dec})
F80E:16	Timestamp 2 Trigger	See F80E:15.	UINT16	RW	0x0000 (0 _{dec})

F81F DPO Vendor Data Device

Index (hex)	Name	Meaning	Data type	Flags	Default
F81F:0	DPO Vendor Data Device		USINT	RO	0x1a (26 _{dec})
F81F:10	Enable Calibration Mode		BOOL	RW	00
F81F:11	GainS		UINT	RW	0x4000 (16384 _{dec})
F81F:12	OffsetS		INT	RW	0x0 (0 _{dec})
F81F:13	GainP		UINT	RW	0x4000 (16384 _{dec})
F81F:14	OffsetP		INT	RW	0x0 (0 _{dec})
F81F:15	Gain US		UINT	RW	0x4000 (16384 _{dec})
F81F:16	Offset US		INT	RW	0x0 (0 _{dec})
F81F:17	Gain UP		UINT	RW	0x4000 (16384 _{dec})
F81F:18	Offset UP		INT	RW	0x0 (0 _{dec})
F81F:19	Gain Temperature		UINT	RW	0x4000 (16384 _{dec})
F81F:1A	Offset Temperature		INT	RW	0x0 (0 _{dec})

6.2 Standard objects

Index 1000 Device type (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1000:0	Device type	Device type of the EtherCAT slave: the Lo-Word contains the used CoE profile (5001). The Hi-Word contains the module profile according to the modular device profile.	UINT32	RO	0x10e1389 (17699721 _{dec})

Index 1000 Device type (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1000:0	Device type	Device type of the EtherCAT slave: the Lo-Word contains the used CoE profile (5001). The Hi-Word contains the module profile according to the modular device profile.	UINT32	RO	0x00001389 (5001 _{dec})

Index 1008 Device name

Index (hex)	Name	Meaning	Data type	Flags	Default
1008:0	Device name	Device name of the EtherCAT slave	STRING	RO	EP9214-0023 / EP9224-0023 / EP9214-0024 / EP9224-0024

Index 1009 Hardware version

Index (hex)	Name	Meaning	Data type	Flags	Default
1009:0	Hardware version	Hardware version of the EtherCAT slave	STRING	RO	

Index 100A Software version

Index (hex)	Name	Meaning	Data type	Flags	Default
100A:0	Software version	Firmware version of the EtherCAT slave	STRING	RO	07

100B Bootloader version

Index (hex)	Name	Meaning	Data type	Flags	Default
100B:0	Bootloader version	-	STRING	RO	-

Index 1018 Identity (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1018:0	Identity	Information for identifying the slave	UINT8	RO	0x04 (4 _{dec})
1018:01	Vendor ID	Vendor ID of the EtherCAT slave	UINT32	RO	0x00000002 (2 _{dec})
1018:02	Product code	Product code of the EtherCAT slave	UINT32	RO	0x23FE4052 (603865170 _{dec})
1018:03	Revision	Revision number of the EtherCAT slave; the Low Word (bit 0-15) indicates the special terminal number, the High Word (bit 16-31) refers to the device description	UINT32	RO	0x00000000 (0 _{dec})
1018:04	Serial number	Serial number of the EtherCAT slave; the Low Byte (bit 0-7) of the Low Word contains the year of production, the High Byte (bit 8-15) of the Low Word contains the week of production, the High Word (bit 16-31) is 0	UINT32	RO	0x00000000 (0 _{dec})

Index 1018 Identity (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1018:0	Identity	Information for identifying the slave	UINT8	RO	0x04 (4 _{dec})
1018:01	Vendor ID	Vendor ID of the EtherCAT slave	UINT32	RO	0x00000002 (2 _{dec})
1018:02	Product code	Product code of the EtherCAT slave	UINT32	RO	0x24084052 (604520530 _{dec})
1018:03	Revision	Revision number of the EtherCAT slave; the Low Word (bit 0-15) indicates the special terminal number, the High Word (bit 16-31) refers to the device description	UINT32	RO	0x00000000 (0 _{dec})
1018:04	Serial number	Serial number of the EtherCAT slave; the Low Byte (bit 0-7) of the Low Word contains the year of production, the High Byte (bit 8-15) of the Low Word contains the week of production, the High Word (bit 16-31) is 0	UINT32	RO	0x00000000 (0 _{dec})

Index 10F0 Backup parameter handling

Index (hex)	Name	Meaning	Data type	Flags	Default
10F0:01	Checksum	Checksum across all backup entries of the EtherCAT slave	UINT32	RO	0x00000000 (0 _{dec})

Index 1600 DPO RxPDO-Map Outputs Ch.1

Index (hex)	Name	Meaning	Data type	Flags	Default
1600:0	DPO RxPDO-Map Outputs Ch.1	PDO Mapping RxPDO 1	UINT8	RO	0x06 (6 _{dec})
1600:01	SubIndex 001	1. PDO Mapping entry (object 0x7000 (DPO Outputs Ch.1), entry 0x01 (Output Us))	UINT32	RO	0x7000:01, 1
1600:02	SubIndex 002	2. PDO Mapping entry (object 0x7000 (DPO Outputs Ch.1), entry 0x02 (Output Up))	UINT32	RO	0x7000:02, 1
1600:03	SubIndex 003	3. PDO Mapping entry (2 bits align)	UINT32	RO	0x0000:00, 2
1600:04	SubIndex 004	4. PDO Mapping entry (object 0x7000 (DPO Outputs Ch.1), entry 0x05 (Reset Us))	UINT32	RO	0x7000:05, 1
1600:05	SubIndex 005	5. PDO Mapping entry (object 0x7000 (DPO Outputs Ch.1), entry 0x06 (Reset Up))	UINT32	RO	0x7000:06, 1
1600:06	SubIndex 006	6. PDO Mapping entry (10 bits align)	UINT32	RO	0x0000:00, 10

1601 DPO RxPDO-Map Outputs Ch.2 (EP9214-0023, EP2914-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1601:0	DPO RxPDO-Map Outputs Ch.2		USINT	RO	0x6 (6 _{dec})
1601:01	SubIndex 001		UDINT	RO	0x70100101 (1880097025 _{dec})
1601:02	SubIndex 002		UDINT	RO	0x70100201 (1880097281 _{dec})
1601:03	SubIndex 003		UDINT	RO	0x2 (2 _{dec})
1601:04	SubIndex 004		UDINT	RO	0x70100501 (1880098049 _{dec})
1601:05	SubIndex 005		UDINT	RO	0x70100601 (1880098305 _{dec})
1601:06	SubIndex 006		UDINT	RO	0xa (10 _{dec})

Index 1601 DPO RxPDO-Map Extended Diag Outputs Ch.1 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1601:0	DPO RxPDO-Map Extended Diag Outputs Ch.1	PDO Mapping RxPDO 2	UINT8	RO	0x02 (2 _{dec})
1601:01	SubIndex 001	1. PDO Mapping entry (object 0x7000 (DPO Outputs Ch.1), entry 0x11 (Reset Extended Diag Data))	UINT32	RO	0x7000:11, 1
1601:02	SubIndex 002	2. PDO Mapping entry (15 bits align)	UINT32	RO	0x0000:00, 15

1602 DPO RxPDO-Map Outputs Ch.3 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1602:0	DPO RxPDO-Map Outputs Ch.3		USINT	RO	0x6 (6 _{dec})
1602:01	SubIndex 001		UDINT	RO	0x70200101 (1881145601 _{dec})
1602:02	SubIndex 002		UDINT	RO	0x70200201 (1881145857 _{dec})
1602:03	SubIndex 003		UDINT	RO	0x2 (2 _{dec})
1602:04	SubIndex 004		UDINT	RO	0x70200501 (1881146625 _{dec})
1602:05	SubIndex 005		UDINT	RO	0x70200601 (1881146881 _{dec})
1602:06	SubIndex 006		UDINT	RO	0xa (10 _{dec})

Index 1602 DPO RxPDO-Map Outputs Ch.2 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1602:0	DPO RxPDO-Map Outputs Ch.2	PDO Mapping RxPDO 3	UINT8	RO	0x06 (6 _{dec})
1602:01	SubIndex 001	1. PDO Mapping entry (object 0x7010 (DPO Outputs Ch.2), entry 0x01 (Output Us))	UINT32	RO	0x7010:01, 1
1602:02	SubIndex 002	2. PDO Mapping entry (object 0x7010 (DPO Outputs Ch.2), entry 0x02 (Output Up))	UINT32	RO	0x7010:02, 1
1602:03	SubIndex 003	3. PDO Mapping entry (2 bits align)	UINT32	RO	0x0000:00, 2
1602:04	SubIndex 004	4. PDO Mapping entry (object 0x7010 (DPO Outputs Ch.2), entry 0x05 (Reset Us))	UINT32	RO	0x7010:05, 1
1602:05	SubIndex 005	5. PDO Mapping entry (object 0x7010 (DPO Outputs Ch.2), entry 0x06 (Reset Up))	UINT32	RO	0x7010:06, 1
1602:06	SubIndex 006	6. PDO Mapping entry (10 bits align)	UINT32	RO	0x0000:00, 10

1603 DPO RxPDO-Map Outputs Ch.4 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1603:0	DPO RxPDO-Map Outputs Ch.4		USINT	RO	0x6 (6 _{dec})
1603:01	SubIndex 001		UDINT	RO	0x70300101 (1882194177 _{dec})
1603:02	SubIndex 002		UDINT	RO	0x70300201 (1882194433 _{dec})
1603:03	SubIndex 003		UDINT	RO	0x2 (2 _{dec})
1603:04	SubIndex 004		UDINT	RO	0x70300501 (1882195201 _{dec})
1603:05	SubIndex 005		UDINT	RO	0x70300601 (1882195457 _{dec})
1603:06	SubIndex 006		UDINT	RO	0xa (10 _{dec})

Index 1603 DPO RxPDO-Map Extended Diag Outputs Ch.2 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1603:0	DPO RxPDO-Map Extended Diag Outputs Ch.2	PDO Mapping RxPDO 4	UINT8	RO	0x02 (2 _{dec})
1603:01	SubIndex 001	1. PDO Mapping entry (object 0x7010 (DPO Outputs Ch.2), entry 0x11 (Reset Extended Diag Data))	UINT32	RO	0x7010:11, 1
1603:02	SubIndex 002	2. PDO Mapping entry (15 bits align)	UINT32	RO	0x0000:00, 15

1604 DPO RxPDO-Map Outputs Device (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1604:0	DPO RxPDO-Map Outputs Device		USINT	RO	0x4 (4 _{dec})
1604:01	SubIndex 001		UDINT	RO	0xf7070101 (4144431361 _{dec})
1604:02	SubIndex 002		UDINT	RO	0x2 (2 _{dec})
1604:03	SubIndex 003		UDINT	RO	0xf7070401 (4144432129 _{dec})
1604:04	SubIndex 004		UDINT	RO	0xc (12 _{dec})

Index 1604 DPO RxPDO-Map Outputs Ch.3 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1604:0	DPO RxPDO-Map Outputs Ch.3	PDO Mapping RxPDO 5	UINT8	RO	0x06 (6 _{dec})
1604:01	SubIndex 001	1. PDO Mapping entry (object 0x7020 (DPO Outputs Ch.3), entry 0x01 (Output Us))	UINT32	RO	0x7020:01, 1
1604:02	SubIndex 002	2. PDO Mapping entry (object 0x7020 (DPO Outputs Ch.3), entry 0x02 (Output Up))	UINT32	RO	0x7020:02, 1
1604:03	SubIndex 003	3. PDO Mapping entry (2 bits align)	UINT32	RO	0x0000:00, 2
1604:04	SubIndex 004	4. PDO Mapping entry (object 0x7020 (DPO Outputs Ch.3), entry 0x05 (Reset Us))	UINT32	RO	0x7020:05, 1
1604:05	SubIndex 005	5. PDO Mapping entry (object 0x7020 (DPO Outputs Ch.3), entry 0x06 (Reset Up))	UINT32	RO	0x7020:06, 1
1604:06	SubIndex 006	6. PDO Mapping entry (10 bits align)	UINT32	RO	0x0000:00, 10

Index 1605 DPO RxPDO-Map Extended Diag Outputs Ch.3 (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1605:0	DPO RxPDO-Map Extended Diag Outputs Ch.3	PDO Mapping RxPDO 6	UINT8	RO	0x02 (2 _{dec})
1605:01	SubIndex 001	1. PDO Mapping entry (object 0x7020 (DPO Outputs Ch.3), entry 0x11 (Reset Extended Diag Data))	UINT32	RO	0x7020:11, 1
1605:02	SubIndex 002	2. PDO Mapping entry (15 bits align)	UINT32	RO	0x0000:00, 15

Index 1606 DPO RxPDO-Map Outputs Ch.4 (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1606:0	DPO RxPDO-Map Outputs Ch.4	PDO Mapping RxPDO 7	UINT8	RO	0x06 (6 _{dec})
1606:01	SubIndex 001	1. PDO Mapping entry (object 0x7030 (DPO Outputs Ch.4), entry 0x01 (Output Us))	UINT32	RO	0x7030:01, 1
1606:02	SubIndex 002	2. PDO Mapping entry (object 0x7030 (DPO Outputs Ch.4), entry 0x02 (Output Up))	UINT32	RO	0x7030:02, 1
1606:03	SubIndex 003	3. PDO Mapping entry (2 bits align)	UINT32	RO	0x0000:00, 2
1606:04	SubIndex 004	4. PDO Mapping entry (object 0x7030 (DPO Outputs Ch.4), entry 0x05 (Reset Us))	UINT32	RO	0x7030:05, 1
1606:05	SubIndex 005	5. PDO Mapping entry (object 0x7030 (DPO Outputs Ch.4), entry 0x06 (Reset Up))	UINT32	RO	0x7030:06, 1
1606:06	SubIndex 006	6. PDO Mapping entry (10 bits align)	UINT32	RO	0x0000:00, 10

Index 1607 DPO RxPDO-Map Extended Diag Outputs Ch.4 (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1607:0	DPO RxPDO-Map Extended Diag Outputs Ch.4	PDO Mapping RxPDO 8	UINT8	RO	0x02 (2 _{dec})
1607:01	SubIndex 001	1. PDO Mapping entry (object 0x7030 (DPO Outputs Ch.4), entry 0x11 (Reset Extended Diag Data))	UINT32	RO	0x7030:11, 1
1607:02	SubIndex 002	2. PDO Mapping entry (15 bits align)	UINT32	RO	0x0000:00, 15

Index 1608 DPO RxPDO-Map Outputs Device (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1608:0	DPO RxPDO-Map Outputs Device	PDO Mapping RxPDO 9	UINT8	RO	0x04 (4 _{dec})
1608:01	SubIndex 001	1. PDO Mapping entry (object 0xF707 (DPO Outputs Device), entry 0x01 (Enable Control Via Fieldbus))	UINT32	RO	0xF707:01, 1
1608:02	SubIndex 002	2. PDO Mapping entry (2 bits align)	UINT32	RO	0x0000:00, 2
1608:03	SubIndex 003	3. PDO Mapping entry (object 0xF707 (DPO Outputs Device), entry 0x04 (Global Reset))	UINT32	RO	0xF707:04, 1
1608:04	SubIndex 004	4. PDO Mapping entry (12 bits align)	UINT32	RO	0x0000:00, 12

Index 1609 DPO RxPDO-Map Extended Diag Outputs Device (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1609:0	DPO RxPDO-Map Extended Diag Outputs Device	PDO Mapping RxPDO 10	UINT8	RO	0x02 (2 _{dec})
1609:01	SubIndex 001	1. PDO Mapping entry (object 0xF707 (DPO Outputs Device), entry 0x11 (Reset Extended Diag Data))	UINT32	RO	0xF707:11, 1
1609:02	SubIndex 002	2. PDO Mapping entry (15 bits align)	UINT32	RO	0x0000:00, 15

Index 1610 LOG RxPDO-Map Control (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1610:0	LOG RxPDO-Map Control	PDO Mapping RxPDO 17	UINT8	RO	0x03 (3 _{dec})
1610:01	SubIndex 001	1. PDO Mapping entry (object 0x7040 (LOG Control), entry 0x01 (Start Logger))	UINT32	RO	0x7040:01, 1
1610:02	SubIndex 002	2. PDO Mapping entry (object 0x7040 (LOG Control), entry 0x02 (Stop Logger))	UINT32	RO	0x7040:02, 1
1610:03	SubIndex 003	3. PDO Mapping entry (14 bits align)	UINT32	RO	0x0000:00, 14

Index 1A00 DPO TxPDO-Map Inputs Ch.1 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A00:0	DPO TxPDO-Map Inputs Ch.1	PDO Mapping TxPDO 1	UINT8	RO	0x0E (14 _{dec})
1A00:01	SubIndex 001	1. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x01 (Error Us))	UINT32	RO	0x6000:01, 1
1A00:02	SubIndex 002	2. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x02 (Error Up))	UINT32	RO	0x6000:02, 1
1A00:03	SubIndex 003	3. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x03 (Warning Us))	UINT32	RO	0x6000:03, 1
1A00:04	SubIndex 004	4. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x04 (Warning Up))	UINT32	RO	0x6000:04, 1
1A00:05	SubIndex 005	5. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x05 (Status Us))	UINT32	RO	0x6000:05, 1
1A00:06	SubIndex 006	6. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x06 (Status Up))	UINT32	RO	0x6000:06, 1
1A00:07	SubIndex 007	7. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x07 (Channel Error))	UINT32	RO	0x6000:07, 1
1A00:08	SubIndex 008	8. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x08 (Error Sum Current))	UINT32	RO	0x6000:08, 1
1A00:09	SubIndex 009	9. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x09 (Warning Sum Current))	UINT32	RO	0x6000:09, 1
1A00:0A	SubIndex 010	10. PDO Mapping entry (5 bits align)	UINT32	RO	0x0000:00, 5
1A00:0B	SubIndex 011	11. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x0F (TxPDO State))	UINT32	RO	0x6000:0F, 1
1A00:0C	SubIndex 012	12. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x10 (TxPDO Toggle))	UINT32	RO	0x6000:10, 1
1A00:0D	SubIndex 013	13. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x11 (Current Us))	UINT32	RO	0x6000:11, 16
1A00:0E	SubIndex 014	14. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x12 (Current Up))	UINT32	RO	0x6000:12, 16

Index 1A01 DPO TxPDO-Map Extended Diag Inputs Ch.1 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A01:0	DPO TxPDO-Map Extended Diag Inputs Ch.1	PDO Mapping TxPDO 2	UINT8	RO	0x04 (4 _{dec})
1A01:01	SubIndex 001	1. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x13 (Peak Value 1))	UINT32	RO	0x6000:13, 16
1A01:02	SubIndex 002	2. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x14 (Peak Value 2))	UINT32	RO	0x6000:14, 16
1A01:03	SubIndex 003	3. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x17 (Timestamp 1))	UINT32	RO	0x6000:17, 64
1A01:04	SubIndex 004	4. PDO Mapping entry (object 0x6000 (DPO Inputs Ch.1), entry 0x18 (Timestamp 2))	UINT32	RO	0x6000:18, 64

1A01 DPO TxPDO-Map Inputs Ch.2 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A01:0	DPO TxPDO-Map Inputs Ch.2		USINT	RO	0xb (11 _{dec})
1A01:01	SubIndex 001		UDINT	RO	0x60100101 (1611661569 _d ec)
1A01:02	SubIndex 002		UDINT	RO	0x60100201 (1611661825 _d ec)
1A01:03	SubIndex 003		UDINT	RO	0x60100301 (1611662081 _d ec)
1A01:04	SubIndex 004		UDINT	RO	0x60100401 (1611662337 _d ec)
1A01:05	SubIndex 005		UDINT	RO	0x60100501 (1611662593 _d ec)
1A01:06	SubIndex 006		UDINT	RO	0x60100601 (1611662849 _d ec)
1A01:07	SubIndex 007		UDINT	RO	0x60100701 (1611663105 _d ec)
1A01:08	SubIndex 008		UDINT	RO	0x6 (6 _{dec})
1A01:09	SubIndex 009		UDINT	RO	0x60100e01 (1611664897 _d ec)
1A01:0A	SubIndex 010		UDINT	RO	0x60100f01 (1611665153 _d ec)
1A01:0B	SubIndex 011		UDINT	RO	0x60101001 (1611665409 _d ec)

1A02 DPO TxPDO-Map Inputs Ch.3 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A02:0	DPO TxPDO-Map Inputs Ch.3		USINT	RO	0xb (11 _{dec})
1A02:01	SubIndex 001		UDINT	RO	0x60200101 (1612710145 _d ec)
1A02:02	SubIndex 002		UDINT	RO	0x60200201 (1612710401 _d ec)
1A02:03	SubIndex 003		UDINT	RO	0x60200301 (1612710657 _d ec)
1A02:04	SubIndex 004		UDINT	RO	0x60200401 (1612710913 _d ec)
1A02:05	SubIndex 005		UDINT	RO	0x60200501 (1612711169 _d ec)
1A02:06	SubIndex 006		UDINT	RO	0x60200601 (1612711425 _d ec)
1A02:07	SubIndex 007		UDINT	RO	0x60200701 (1612711681 _d ec)
1A02:08	SubIndex 008		UDINT	RO	0x6 (6 _{dec})
1A02:09	SubIndex 009		UDINT	RO	0x60200e01 (1612713473 _d ec)
1A02:0A	SubIndex 010		UDINT	RO	0x60200f01 (1612713729 _d ec)
1A02:0B	SubIndex 011		UDINT	RO	0x60201001 (1612713985 _d ec)

Index 1A02 DPO TxPDO-Map Inputs Ch.2 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A02:0	DPO TxPDO-Map Inputs Ch.2	PDO Mapping TxPDO 3	UINT8	RO	0x0E (14 _{dec})
1A02:01	SubIndex 001	1. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x01 (Error Us))	UINT32	RO	0x6010:01, 1
1A02:02	SubIndex 002	2. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x02 (Error Up))	UINT32	RO	0x6010:02, 1
1A02:03	SubIndex 003	3. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x03 (Warning Us))	UINT32	RO	0x6010:03, 1
1A02:04	SubIndex 004	4. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x04 (Warning Up))	UINT32	RO	0x6010:04, 1
1A02:05	SubIndex 005	5. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x05 (Status Us))	UINT32	RO	0x6010:05, 1
1A02:06	SubIndex 006	6. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x06 (Status Up))	UINT32	RO	0x6010:06, 1
1A02:07	SubIndex 007	7. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x07 (Channel Error))	UINT32	RO	0x6010:07, 1
1A02:08	SubIndex 008	8. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x08 (Error Sum Current))	UINT32	RO	0x6010:08, 1
1A02:09	SubIndex 009	9. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x09 (Warning Sum Current))	UINT32	RO	0x6010:09, 1
1A02:0A	SubIndex 010	10. PDO Mapping entry (5 bits align)	UINT32	RO	0x0000:00, 5
1A02:0B	SubIndex 011	11. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x0F (TxPDO State))	UINT32	RO	0x6010:0F, 1
1A02:0C	SubIndex 012	12. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x10 (TxPDO Toggle))	UINT32	RO	0x6010:10, 1
1A02:0D	SubIndex 013	13. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x11 (Current Us))	UINT32	RO	0x6010:11, 16
1A02:0E	SubIndex 014	14. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x12 (Current Up))	UINT32	RO	0x6010:12, 16

1A03 DPO TxPDO-Map Inputs Ch.4 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A03:0	DPO TxPDO-Map Inputs Ch.4		USINT	RO	0xb (11 _{dec})
1A03:01	SubIndex 001		UDINT	RO	0x60300101 (1613758721 _d ec)
1A03:02	SubIndex 002		UDINT	RO	0x60300201 (1613758977 _d ec)
1A03:03	SubIndex 003		UDINT	RO	0x60300301 (1613759233 _d ec)
1A03:04	SubIndex 004		UDINT	RO	0x60300401 (1613759489 _d ec)
1A03:05	SubIndex 005		UDINT	RO	0x60300501 (1613759745 _d ec)
1A03:06	SubIndex 006		UDINT	RO	0x60300601 (1613760001 _d ec)
1A03:07	SubIndex 007		UDINT	RO	0x60300701 (1613760257 _d ec)
1A03:08	SubIndex 008		UDINT	RO	0x6 (6 _{dec})
1A03:09	SubIndex 009		UDINT	RO	0x60300e01 (1613762049 _d ec)
1A03:0A	SubIndex 010		UDINT	RO	0x60300f01 (1613762305 _d ec)
1A03:0B	SubIndex 011		UDINT	RO	0x60301001 (1613762561 _d ec)

Index 1A03 DPO TxPDO-Map Extended Diag Inputs Ch.2 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A03:0	DPO TxPDO-Map Extended Diag Inputs Ch.2	PDO Mapping TxPDO 4	UINT8	RO	0x04 (4 _{dec})
1A03:01	SubIndex 001	1. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x13 (Peak Value 1))	UINT32	RO	0x6010:13, 16
1A03:02	SubIndex 002	2. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x14 (Peak Value 2))	UINT32	RO	0x6010:14, 16
1A03:03	SubIndex 003	3. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x17 (Timestamp 1))	UINT32	RO	0x6010:17, 64
1A03:04	SubIndex 004	4. PDO Mapping entry (object 0x6010 (DPO Inputs Ch.2), entry 0x18 (Timestamp 2))	UINT32	RO	0x6010:18, 64

1A04 DPO TxPDO-Map Inputs Device (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A04:0	DPO TxPDO-Map Inputs Device		USINT	RO	0xc (12 _{dec})
1A04:01	SubIndex 001		UDINT	RW	0xf6070101 (4127654145 _d ec)
1A04:02	SubIndex 002		UDINT	RW	0xf6070201 (4127654401 _d ec)
1A04:03	SubIndex 003		UDINT	RW	0xf6070301 (4127654657 _d ec)
1A04:04	SubIndex 004		UDINT	RW	0xf6070401 (4127654913 _d ec)
1A04:05	SubIndex 005		UDINT	RW	0xf6070501 (4127655169 _d ec)
1A04:06	SubIndex 006		UDINT	RW	0xf6070601 (4127655425 _d ec)
1A04:07	SubIndex 007		UDINT	RW	0xf6070701 (4127655681 _d ec)
1A04:08	SubIndex 008		UDINT	RW	0x4 (4 _{dec})
1A04:09	SubIndex 009		UDINT	RW	0xf6070c01 (4127656961 _d ec)
1A04:0A	SubIndex 010		UDINT	RW	0x2 (2 _{dec})
1A04:0B	SubIndex 011		UDINT	RW	0xf6070f01 (4127657729 _d ec)
1A04:0C	SubIndex 012		UDINT	RW	0xf6071001 (4127657985 _d ec)

Index 1A04 DPO TxPDO-Map Inputs Ch.3 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A04:0	DPO TxPDO-Map Inputs Ch.3	PDO Mapping TxPDO 5	UINT8	RO	0x0E (14 _{dec})
1A04:01	SubIndex 001	1. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x01 (Error Us))	UINT32	RO	0x6020:01, 1
1A04:02	SubIndex 002	2. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x02 (Error Up))	UINT32	RO	0x6020:02, 1
1A04:03	SubIndex 003	3. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x03 (Warning Us))	UINT32	RO	0x6020:03, 1
1A04:04	SubIndex 004	4. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x04 (Warning Up))	UINT32	RO	0x6020:04, 1
1A04:05	SubIndex 005	5. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x05 (Status Us))	UINT32	RO	0x6020:05, 1
1A04:06	SubIndex 006	6. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x06 (Status Up))	UINT32	RO	0x6020:06, 1
1A04:07	SubIndex 007	7. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x07 (Channel Error))	UINT32	RO	0x6020:07, 1
1A04:08	SubIndex 008	8. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x08 (Error Sum Current))	UINT32	RO	0x6020:08, 1
1A04:09	SubIndex 009	9. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x09 (Warning Sum Current))	UINT32	RO	0x6020:09, 1
1A04:0A	SubIndex 010	10. PDO Mapping entry (5 bits align)	UINT32	RO	0x0000:00, 5
1A04:0B	SubIndex 011	11. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x0F (TxPDO State))	UINT32	RO	0x6020:0F, 1
1A04:0C	SubIndex 012	12. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x10 (TxPDO Toggle))	UINT32	RO	0x6020:10, 1
1A04:0D	SubIndex 013	13. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x11 (Current Us))	UINT32	RO	0x6020:11, 16
1A04:0E	SubIndex 014	14. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x12 (Current Up))	UINT32	RO	0x6020:12, 16

Index 1A05 DPO TxPDO-Map Extended Diag Inputs Ch.3 (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A05:0	DPO TxPDO-Map Extended Diag Inputs Ch.3	PDO Mapping TxPDO 6	UINT8	RO	0x04 (4 _{dec})
1A05:01	SubIndex 001	1. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x13 (Peak Value 1))	UINT32	RO	0x6020:13, 16
1A05:02	SubIndex 002	2. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x14 (Peak Value 2))	UINT32	RO	0x6020:14, 16
1A05:03	SubIndex 003	3. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x17 (Timestamp 1))	UINT32	RO	0x6020:17, 64
1A05:04	SubIndex 004	4. PDO Mapping entry (object 0x6020 (DPO Inputs Ch.3), entry 0x18 (Timestamp 2))	UINT32	RO	0x6020:18, 64

Index 1A06 DPO TxPDO-Map Inputs Ch.4 (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A06:0	DPO TxPDO-Map Inputs Ch.4	PDO Mapping TxPDO 7	UINT8	RO	0x0E (14 _{dec})
1A06:01	SubIndex 001	1. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x01 (Error Us))	UINT32	RO	0x6030:01, 1
1A06:02	SubIndex 002	2. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x02 (Error Up))	UINT32	RO	0x6030:02, 1
1A06:03	SubIndex 003	3. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x03 (Warning Us))	UINT32	RO	0x6030:03, 1
1A06:04	SubIndex 004	4. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x04 (Warning Up))	UINT32	RO	0x6030:04, 1
1A06:05	SubIndex 005	5. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x05 (Status Us))	UINT32	RO	0x6030:05, 1
1A06:06	SubIndex 006	6. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x06 (Status Up))	UINT32	RO	0x6030:06, 1
1A06:07	SubIndex 007	7. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x07 (Channel Error))	UINT32	RO	0x6030:07, 1
1A06:08	SubIndex 008	8. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x08 (Error Sum Current))	UINT32	RO	0x6030:08, 1
1A06:09	SubIndex 009	9. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x09 (Warning Sum Current))	UINT32	RO	0x6030:09, 1
1A06:0A	SubIndex 010	10. PDO Mapping entry (5 bits align)	UINT32	RO	0x0000:00, 5
1A06:0B	SubIndex 011	11. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x0F (TxPDO State))	UINT32	RO	0x6030:0F, 1
1A06:0C	SubIndex 012	12. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x10 (TxPDO Toggle))	UINT32	RO	0x6030:10, 1
1A06:0D	SubIndex 013	13. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x11 (Current Us))	UINT32	RO	0x6030:11, 16
1A06:0E	SubIndex 014	14. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x12 (Current Up))	UINT32	RO	0x6030:12, 16

Index 1A07 DPO TxPDO-Map Extended Diag Inputs Ch.4 (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A07:0	DPO TxPDO-Map Extended Diag Inputs Ch.4	PDO Mapping TxPDO 8	UINT8	RO	0x04 (4 _{dec})
1A07:01	SubIndex 001	1. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x13 (Peak Value 1))	UINT32	RO	0x6030:13, 16
1A07:02	SubIndex 002	2. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x14 (Peak Value 2))	UINT32	RO	0x6030:14, 16
1A07:03	SubIndex 003	3. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x17 (Timestamp 1))	UINT32	RO	0x6030:17, 64
1A07:04	SubIndex 004	4. PDO Mapping entry (object 0x6030 (DPO Inputs Ch.4), entry 0x18 (Timestamp 2))	UINT32	RO	0x6030:18, 64

Index 1A08 DPO TxPDO-Map Inputs Device (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A08:0	DPO TxPDO-Map Inputs Device	PDO Mapping TxPDO 9	UINT8	RO	0x11 (17 _{dec})
1A08:01	SubIndex 001	1. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x01 (Temperature Warning))	UINT32	RO	0xF607:01, 1
1A08:02	SubIndex 002	2. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x02 (Temperature Error))	UINT32	RO	0xF607:02, 1
1A08:03	SubIndex 003	3. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x03 (Us Warning))	UINT32	RO	0xF607:03, 1
1A08:04	SubIndex 004	4. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x04 (Us Error))	UINT32	RO	0xF607:04, 1
1A08:05	SubIndex 005	5. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x05 (Up Warning))	UINT32	RO	0xF607:05, 1
1A08:06	SubIndex 006	6. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x06 (Up Error))	UINT32	RO	0xF607:06, 1
1A08:07	SubIndex 007	7. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x07 (Global Error Bit))	UINT32	RO	0xF607:07, 1
1A08:08	SubIndex 008	8. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x08 (Sum Current Warning))	UINT32	RO	0xF607:08, 1
1A08:09	SubIndex 009	9. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x09 (Sum Current Error))	UINT32	RO	0xF607:09, 1
1A08:0A	SubIndex 010	10. PDO Mapping entry (5 bits align)	UINT32	RO	0x0000:00, 5
1A08:0B	SubIndex 011	11. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x0F (TxPDO State))	UINT32	RO	0xF607:0F, 1
1A08:0C	SubIndex 012	12. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x10 (TxPDO Toggle))	UINT32	RO	0xF607:10, 1
1A08:0D	SubIndex 013	13. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x11 (Current Us))	UINT32	RO	0xF607:11, 16
1A08:0E	SubIndex 014	14. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x12 (Current Up))	UINT32	RO	0xF607:12, 16
1A08:0F	SubIndex 015	15. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x13 (Voltage Us))	UINT32	RO	0xF607:13, 16
1A08:10	SubIndex 016	16. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x14 (Voltage Up))	UINT32	RO	0xF607:14, 16
1A08:11	SubIndex 017	17. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x15 (Temperature))	UINT32	RO	0xF607:15, 16

Index 1A09 DPO TxPDO-Map Extended Diag Inputs Device (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A09:0	DPO TxPDO-Map Extended Diag Inputs Device	PDO Mapping TxPDO 10	UINT8	RO	0x04 (4 _{dec})
1A09:01	SubIndex 001	1. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x16 (Peak Value 1))	UINT32	RO	0xF607:16, 16
1A09:02	SubIndex 002	2. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x17 (Peak Value 2))	UINT32	RO	0xF607:17, 16
1A09:03	SubIndex 003	3. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x18 (Timestamp 1))	UINT32	RO	0xF607:18, 64
1A09:04	SubIndex 004	4. PDO Mapping entry (object 0xF607 (DPO Inputs Device), entry 0x19 (Timestamp 2))	UINT32	RO	0xF607:19, 64

Index 1A10 LOG TxPDO-Map Status (only EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1A10:0	LOG TxPDO-Map Status	PDO Mapping TxPDO 17	UINT8	RO	0x04 (4 _{dec})
1A10:01	SubIndex 001	1. PDO Mapping entry (object 0x6040 (LOG Status), entry 0x01 (Logger Running))	UINT32	RO	0x6040:01, 1
1A10:02	SubIndex 002	2. PDO Mapping entry (15 bits align)	UINT32	RO	0x0000:00, 15
1A10:03	SubIndex 003	3. PDO Mapping entry (object 0x6040 (LOG Status), entry 0x11 (Elapsed Time))	UINT32	RO	0x6040:11, 32
1A10:04	SubIndex 004	4. PDO Mapping entry (object 0x6040 (LOG Status), entry 0x12 (Trigger Reason))	UINT32	RO	0x6040:12, 16

Index 1C00 Sync manager type

Index (hex)	Name	Meaning	Data type	Flags	Default
1C00:0	Sync manager type	Using the Sync Managers	UINT8	RO	0x04 (4 _{dec})
1C00:01	SubIndex 001	Sync-Manager Type Channel 1: Mailbox Write	UINT8	RO	0x01 (1 _{dec})
1C00:02	SubIndex 002	Sync-Manager Type Channel 2: Mailbox Read	UINT8	RO	0x02 (2 _{dec})
1C00:03	SubIndex 003	Sync-Manager Type Channel 3: Process Data Write (Outputs)	UINT8	RO	0x03 (3 _{dec})
1C00:04	SubIndex 004	Sync-Manager Type Channel 4: Process Data Read (Inputs)	UINT8	RO	0x04 (4 _{dec})

1C12 RxPDO assign (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1C12:0	RxPDO assign		USINT	RO	0x5 (5 _{dec})
1C12:01	SubIndex 001		UINT	RW	0x1600 (5632 _{dec})
1C12:02	SubIndex 002		UINT	RW	0x1601 (5633 _{dec})
1C12:03	SubIndex 003		UINT	RW	0x1602 (5634 _{dec})
1C12:04	SubIndex 004		UINT	RW	0x1603 (5635 _{dec})
1C12:05	SubIndex 005		UINT	RW	0x1604 (5636 _{dec})

Index 1C12 RxPDO assign (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1C12:0	RxPDO assign	PDO Assign Outputs	UINT8	RW	0x05 (5 _{dec})
1C12:01	Subindex 001	1. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x1600 (5632 _{dec})
1C12:02	Subindex 002	2. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x1602 (5634 _{dec})
1C12:03	Subindex 003	3. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x1604 (5636 _{dec})
1C12:04	Subindex 004	4. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x1606 (5638 _{dec})
1C12:05	Subindex 005	5. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x1608 (5640 _{dec})
1C12:06	Subindex 006	6. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C12:07	Subindex 007	7. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C12:08	Subindex 008	8. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C12:09	Subindex 009	9. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C12:0A	Subindex 010	10. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C12:0B	Subindex 011	11. allocated RxPDO (contains the index of the associated RxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})

1C13 TxPDO assign (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1C13:0	TxPDO assign		USINT	RO	0x5 (5 _{dec})
1C13:01	SubIndex 001		UINT	RW	0x1a00 (6656 _{dec})
1C13:02	SubIndex 002		UINT	RW	0x1a01 (6657 _{dec})
1C13:03	SubIndex 003		UINT	RW	0x1a02 (6658 _{dec})
1C13:04	SubIndex 004		UINT	RW	0x1a03 (6659 _{dec})
1C13:05	SubIndex 005		UINT	RW	0x1a04 (6660 _{dec})

Index 1C13 TxPDO assign (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
1C13:0	TxPDO assign	PDO Assign Inputs	UINT8	RW	0x05 (5 _{dec})
1C13:01	Subindex 001	1. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x1A00 (6656 _{dec})
1C13:02	Subindex 002	2. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x1A02 (6658 _{dec})
1C13:03	Subindex 003	3. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x1A04 (6660 _{dec})
1C13:04	Subindex 004	4. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x1A06 (6662 _{dec})
1C13:05	Subindex 005	5. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x1A08 (6664 _{dec})
1C13:06	Subindex 006	6. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C13:07	Subindex 007	7. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C13:08	Subindex 008	8. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C13:09	Subindex 009	9. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C13:0A	Subindex 010	10. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})
1C13:0B	Subindex 011	11. allocated TxPDO (contains the index of the associated TxPDO mapping object)	UINT16	RW	0x0000 (0 _{dec})

Index 1C32 SM output parameter

Index (hex)	Name	Meaning	Data type	Flags	Default
1C32:0	SM output parameter	Synchronization parameters for the outputs	UINT8	RO	0x20 (32 _{dec})
1C32:01	Sync mode	Current synchronization mode: <ul style="list-style-type: none"> 0: Free Run 1: Synchron with SM 2 Event 2: DC-Mode - Synchron with SYNC0 Event 3: DC-Mode - Synchron with SYNC1 Event 	UINT16	RW	0x0000 (0 _{dec})
1C32:02	Cycle time	Cycle time (in ns): <ul style="list-style-type: none"> Free Run: cycle time of the local timer Synchron with SM 2 Event: cycle time of the master DC-Mode: SYNC0/SYNC1 Cycle Time 	UINT32	RW	0x000F4240 (1000000 _{dec})
1C32:03	Shift time	Time between SYNC0 event and output of the outputs (in ns, DC mode only)	UINT32	RO	0x00000000 (0 _{dec})
1C32:04	Sync modes supported	Supported synchronization modes: <ul style="list-style-type: none"> Bit 0 = 1: Free Run is supported Bit 1 = 1: Synchron with SM 2 Event is supported Bit 2-3 = 01: DC-Mode is supported Bit 4-5 = 10: Output Shift with SYNC1 Event (only DC mode) Bit 14 = 1: dynamic times (measurement through writing of 1C32:08) 	UINT16	RO	0x0001 (1 _{dec})
1C32:05	Minimum cycle time	Minimum cycle time (in ns)	UINT32	RO	0x000F4240 (1000000 _{dec})
1C32:06	Calc and copy time	Minimum time between SYNC0 and SYNC1 event (in ns, DC mode only)	UINT32	RO	0x00000000 (0 _{dec})
1C32:07	Minimum delay time		UINT32	RO	0x00000000 (0 _{dec})
1C32:08	Get Cycle Time	Possible values: <ul style="list-style-type: none"> 0: Stop measurement of the local cycle time 1: Start measurement of the local cycle time <p>The parameters 1C32:03, 1C32:05, 1C32:06, 1C32:09, 1C33:03, 1C33:06, 1C33:09 are updated with the maximum measured values.</p> <p>For a subsequent measurement the measured values are reset</p>	UINT16	RW	0x0000 (0 _{dec})
1C32:09	Maximum delay time	Time between SYNC1 event and output of the outputs (in ns, DC mode only)	UINT32	RO	0x00000000 (0 _{dec})
1C32:0B	SM event missed counter	Number of missed SM events in OPERATIONAL (DC mode only)	UINT16	RO	0x0000 (0 _{dec})
1C32:0C	Cycle exceeded counter	Number of occasions the cycle time was exceeded in OPERATIONAL (cycle was not completed in time or the next cycle began too early)	UINT16	RO	0x0000 (0 _{dec})
1C32:0D	Shift too short counter	Number of occasions that the interval between SYNC0 and SYNC1 event was too short (DC mode only)	UINT16	RO	0x0000 (0 _{dec})
1C32:20	Sync error	The synchronization was not correct in the last cycle (outputs were output too late; DC mode only)	BOOLEAN	RO	0x00 (0 _{dec})

Index 1C33 SM input parameter

Index (hex)	Name	Meaning	Data type	Flags	Default
1C33:0	SM input parameter	Synchronization parameters for the inputs	UINT8	RO	0x20 (32 _{dec})
1C33:01	Sync mode	Current synchronization mode: <ul style="list-style-type: none"> 0: Free Run 1: Synchron with SM 3 Event (no outputs available) 2: DC - Synchron with SYNC0 Event 3: DC - Synchron with SYNC1 Event 34: Synchron with SM 2 Event (outputs available) 	UINT16	RW	0x0000 (0 _{dec})
1C33:02	Cycle time	as 1C32:02	UINT32	RW	0x000F4240 (1000000 _{dec})
1C33:03	Shift time	Time between SYNC0 event and reading of the inputs (in ns, DC mode only)	UINT32	RO	0x00000000 (0 _{dec})
1C33:04	Sync modes supported	Supported synchronization modes: <ul style="list-style-type: none"> Bit 0: Free Run is supported Bit 1: Synchron with SM 2 Event is supported (outputs available) Bit 1: Synchron with SM 3 Event is supported (no outputs available) Bit 2-3 = 01: DC-Mode is supported Bit 4-5 = 01: Input Shift through local event (outputs available) Bit 4-5 = 10: Input Shift with SYNC1 Event (no outputs available) Bit 14 = 1: dynamic times (measurement through writing of 1C32:08 or 1C33:08) 	UINT16	RO	0x0001 (1 _{dec})
1C33:05	Minimum cycle time	as 1C32:05	UINT32	RO	0x000F4240 (1000000 _{dec})
1C33:06	Calc and copy time	Time between reading of the inputs and availability of the inputs for the master (in ns, only DC mode)	UINT32	RO	0x00000000 (0 _{dec})
1C33:07	Minimum delay time		UINT32	RO	0x00000000 (0 _{dec})
1C33:08	Get Cycle Time	as 1C32:08	UINT16	RW	0x0000 (0 _{dec})
1C33:09	Maximum delay time	Time between SYNC1 event and reading of the inputs (in ns, only DC mode)	UINT32	RO	0x00000000 (0 _{dec})
1C33:0B	SM event missed counter	as 1C32:11	UINT16	RO	0x0000 (0 _{dec})
1C33:0C	Cycle exceeded counter	as 1C32:12	UINT16	RO	0x0000 (0 _{dec})
1C33:0D	Shift too short counter	as 1C32:13	UINT16	RO	0x0000 (0 _{dec})
1C33:20	Sync error	as 1C32:32	BOOLEAN	RO	0x00 (0 _{dec})

F000 Modular Device Profile

Index (hex)	Name	Meaning	Data type	Flags	Default
F000:0	Modular Device Profile		USINT	RO	0x2 (2 _{dec})
F000:01	Index distance		UINT	RO	0x10 (16 _{dec})
F000:02	Maximum number of modules		UINT	RO	0x4 (4 _{dec})

F008 Code word

Index (hex)	Name	Meaning	Data type	Flags	Default
F008:0	Code word	-	UDINT	RO	-

F010 Module Profile List

Index (hex)	Name	Meaning	Data type	Flags	Default
F010:0	Module Profile List		USINT	RO	0x4 (4 _{dec})
F010:01	SubIndex 001		UDINT	RO	0x10e (270 _{dec})
F010:02	SubIndex 002		UDINT	RO	0x10e (270 _{dec})
F010:03	SubIndex 003		UDINT	RO	0x10e (270 _{dec})
F010:04	SubIndex 004		UDINT	RO	0x10e (270 _{dec})

6.3 Profile-specific objects

6000 DPO Inputs Ch.1 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6000:0	DPO Inputs Ch.1		USINT	RO	0x10 (16 _{dec})
6000:01	Error Us	-	BOOL	RO	-
6000:02	Error Up	-	BOOL	RO	-
6000:03	Warning Us	-	BOOL	RO	-
6000:04	Warning Up	-	BOOL	RO	-
6000:05	Status Us	-	BOOL	RO	-
6000:06	Status Up	-	BOOL	RO	-
6000:07	Channel Error	-	BOOL	RO	-
6000:0E	Sync error	-	BOOL	RO	-
6000:0F	TxPDO State	-	BOOL	RO	-
6000:10	TxPDO Toggle	-	BOOL	RO	-

Index 6000 DPO Inputs Ch.1 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6000:0	DPO Inputs Ch.1		UINT8	RO	0x18 (24 _{dec})
6000:01	Error Us		BOOLEAN	RO	0x00 (0 _{dec})
6000:02	Error Up		BOOLEAN	RO	0x00 (0 _{dec})
6000:03	Warning Us		BOOLEAN	RO	0x00 (0 _{dec})
6000:04	Warning Up		BOOLEAN	RO	0x00 (0 _{dec})
6000:05	Status Us		BOOLEAN	RO	0x00 (0 _{dec})
6000:06	Status Up		BOOLEAN	RO	0x00 (0 _{dec})
6000:07	Channel Error		BOOLEAN	RO	0x00 (0 _{dec})
6000:08	Error Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6000:09	Warning Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6000:0F	TxPDO State		BOOLEAN	RO	0x00 (0 _{dec})
6000:10	TxPDO Toggle		BOOLEAN	RO	0x00 (0 _{dec})
6000:11	Current Us		INT16	RO	0x0000 (0 _{dec})
6000:12	Current Up		INT16	RO	0x0000 (0 _{dec})
6000:13	Peak Value 1		INT16	RO	0x0000 (0 _{dec})
6000:14	Peak Value 2		INT16	RO	0x0000 (0 _{dec})
6000:17	Timestamp 1		UINT64	RO	
6000:18	Timestamp 2		UINT64	RO	

6010 DPO Inputs Ch.2 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6010:0	DPO Inputs Ch.2		USINT	RO	0x10 (16 _{dec})
6010:01	Error Us	-	BOOL	RO	-
6010:02	Error Up	-	BOOL	RO	-
6010:03	Warning Us	-	BOOL	RO	-
6010:04	Warning Up	-	BOOL	RO	-
6010:05	Status Us	-	BOOL	RO	-
6010:06	Status Up	-	BOOL	RO	-
6010:07	Channel Error	-	BOOL	RO	-
6010:0E	Sync error	-	BOOL	RO	-
6010:0F	TxPDO State	-	BOOL	RO	-
6010:10	TxPDO Toggle	-	BOOL	RO	-

Index 6010 DPO Inputs Ch.2 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6010:0	DPO Inputs Ch.2		UINT8	RO	0x18 (24 _{dec})
6010:01	Error Us		BOOLEAN	RO	0x00 (0 _{dec})
6010:02	Error Up		BOOLEAN	RO	0x00 (0 _{dec})
6010:03	Warning Us		BOOLEAN	RO	0x00 (0 _{dec})
6010:04	Warning Up		BOOLEAN	RO	0x00 (0 _{dec})
6010:05	Status Us		BOOLEAN	RO	0x00 (0 _{dec})
6010:06	Status Up		BOOLEAN	RO	0x00 (0 _{dec})
6010:07	Channel Error		BOOLEAN	RO	0x00 (0 _{dec})
6010:08	Error Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6010:09	Warning Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6010:0F	TxPDO State		BOOLEAN	RO	0x00 (0 _{dec})
6010:10	TxPDO Toggle		BOOLEAN	RO	0x00 (0 _{dec})
6010:11	Current Us		INT16	RO	0x0000 (0 _{dec})
6010:12	Current Up		INT16	RO	0x0000 (0 _{dec})
6010:13	Peak Value 1		INT16	RO	0x0000 (0 _{dec})
6010:14	Peak Value 2		INT16	RO	0x0000 (0 _{dec})
6010:17	Timestamp 1		UINT64	RO	
6010:18	Timestamp 2		UINT64	RO	

6020 DPO Inputs Ch.3 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6020:0	DPO Inputs Ch.3		USINT	RO	0x10 (16 _{dec})
6020:01	Error Us	-	BOOL	RO	-
6020:02	Error Up	-	BOOL	RO	-
6020:03	Warning Us	-	BOOL	RO	-
6020:04	Warning Up	-	BOOL	RO	-
6020:05	Status Us	-	BOOL	RO	-
6020:06	Status Up	-	BOOL	RO	-
6020:07	Channel Error	-	BOOL	RO	-
6020:0E	Sync error	-	BOOL	RO	-
6020:0F	TxPDO State	-	BOOL	RO	-
6020:10	TxPDO Toggle	-	BOOL	RO	-

Index 6020 DPO Inputs Ch.3 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6020:0	DPO Inputs Ch.3		UINT8	RO	0x18 (24 _{dec})
6020:01	Error Us		BOOLEAN	RO	0x00 (0 _{dec})
6020:02	Error Up		BOOLEAN	RO	0x00 (0 _{dec})
6020:03	Warning Us		BOOLEAN	RO	0x00 (0 _{dec})
6020:04	Warning Up		BOOLEAN	RO	0x00 (0 _{dec})
6020:05	Status Us		BOOLEAN	RO	0x00 (0 _{dec})
6020:06	Status Up		BOOLEAN	RO	0x00 (0 _{dec})
6020:07	Channel Error		BOOLEAN	RO	0x00 (0 _{dec})
6020:08	Error Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6020:09	Warning Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6020:0F	TxPDO State		BOOLEAN	RO	0x00 (0 _{dec})
6020:10	TxPDO Toggle		BOOLEAN	RO	0x00 (0 _{dec})
6020:11	Current Us		INT16	RO	0x0000 (0 _{dec})
6020:12	Current Up		INT16	RO	0x0000 (0 _{dec})
6020:13	Peak Value 1		INT16	RO	0x0000 (0 _{dec})
6020:14	Peak Value 2		INT16	RO	0x0000 (0 _{dec})
6020:17	Timestamp 1		UINT64	RO	
6020:18	Timestamp 2		UINT64	RO	

6030 DPO Inputs Ch.4 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6030:0	DPO Inputs Ch.4		USINT	RO	0x10 (16 _{dec})
6030:01	Error Us	-	BOOL	RO	-
6030:02	Error Up	-	BOOL	RO	-
6030:03	Warning Us	-	BOOL	RO	-
6030:04	Warning Up	-	BOOL	RO	-
6030:05	Status Us	-	BOOL	RO	-
6030:06	Status Up	-	BOOL	RO	-
6030:07	Channel Error	-	BOOL	RO	-
6030:0E	Sync error	-	BOOL	RO	-
6030:0F	TxPDO State	-	BOOL	RO	-
6030:10	TxPDO Toggle	-	BOOL	RO	-

Index 6030 DPO Inputs Ch.4 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
6030:0	DPO Inputs Ch.4		UINT8	RO	0x18 (24 _{dec})
6030:01	Error Us		BOOLEAN	RO	0x00 (0 _{dec})
6030:02	Error Up		BOOLEAN	RO	0x00 (0 _{dec})
6030:03	Warning Us		BOOLEAN	RO	0x00 (0 _{dec})
6030:04	Warning Up		BOOLEAN	RO	0x00 (0 _{dec})
6030:05	Status Us		BOOLEAN	RO	0x00 (0 _{dec})
6030:06	Status Up		BOOLEAN	RO	0x00 (0 _{dec})
6030:07	Channel Error		BOOLEAN	RO	0x00 (0 _{dec})
6030:08	Error Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6030:09	Warning Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
6030:0F	TxPDO State		BOOLEAN	RO	0x00 (0 _{dec})
6030:10	TxPDO Toggle		BOOLEAN	RO	0x00 (0 _{dec})
6030:11	Current Us		INT16	RO	0x0000 (0 _{dec})
6030:12	Current Up		INT16	RO	0x0000 (0 _{dec})
6030:13	Peak Value 1		INT16	RO	0x0000 (0 _{dec})
6030:14	Peak Value 2		INT16	RO	0x0000 (0 _{dec})
6030:17	Timestamp 1		UINT64	RO	
6030:18	Timestamp 2		UINT64	RO	

Index 6040 LOG Status

Index (hex)	Name	Meaning	Data type	Flags	Default
6040:0	LOG Status		UINT8	RO	0x12 (18 _{dec})
6040:01	Logger Running		BOOLEAN	RO	0x00 (0 _{dec})
6040:11	Elapsed Time		UINT32	RO	0x00000000 (0 _{dec})
6040:12	Trigger Reason		UINT16	RO	0x0000 (0 _{dec})

7000 DPO Outputs Ch.1 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7000:0	DPO Outputs Ch.1		USINT	RO	0x6 (6 _{dec})
7000:01	Output Us	-	BOOL	RO	-
7000:02	Output Up	-	BOOL	RO	-
7000:05	Reset Us	-	BOOL	RO	-
7000:06	Reset Up	-	BOOL	RO	-

Index 7000 DPO Outputs Ch.1 EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7000:0	DPO Outputs Ch.1		UINT8	RO	0x11 (17 _{dec})
7000:01	Output Us		BOOLEAN	RO	0x00 (0 _{dec})
7000:02	Output Up		BOOLEAN	RO	0x00 (0 _{dec})
7000:05	Reset Us		BOOLEAN	RO	0x00 (0 _{dec})
7000:06	Reset Up		BOOLEAN	RO	0x00 (0 _{dec})
7000:11	Reset Extended Diag Data		BOOLEAN	RO	0x00 (0 _{dec})

7010 DPO Outputs Ch.2 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7010:0	DPO Outputs Ch.2		USINT	RO	0x6 (6 _{dec})
7010:01	Output Us	-	BOOL	RO	-
7010:02	Output Up	-	BOOL	RO	-
7010:05	Reset Us	-	BOOL	RO	-
7010:06	Reset Up	-	BOOL	RO	-

Index 7010 DPO Outputs Ch.2 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7010:0	DPO Outputs Ch.2		UINT8	RO	0x11 (17 _{dec})
7010:01	Output Us		BOOLEAN	RO	0x00 (0 _{dec})
7010:02	Output Up		BOOLEAN	RO	0x00 (0 _{dec})
7010:05	Reset Us		BOOLEAN	RO	0x00 (0 _{dec})
7010:06	Reset Up		BOOLEAN	RO	0x00 (0 _{dec})
7010:11	Reset Extended Diag Data		BOOLEAN	RO	0x00 (0 _{dec})

7020 DPO Outputs Ch.3 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7020:0	DPO Outputs Ch.3		USINT	RO	0x6 (6 _{dec})
7020:01	Output Us	-	BOOL	RO	-
7020:02	Output Up	-	BOOL	RO	-
7020:05	Reset Us	-	BOOL	RO	-
7020:06	Reset Up	-	BOOL	RO	-

Index 7020 DPO Outputs Ch.3 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7020:0	DPO Outputs Ch.3		UINT8	RO	0x11 (17 _{dec})
7020:01	Output Us		BOOLEAN	RO	0x00 (0 _{dec})
7020:02	Output Up		BOOLEAN	RO	0x00 (0 _{dec})
7020:05	Reset Us		BOOLEAN	RO	0x00 (0 _{dec})
7020:06	Reset Up		BOOLEAN	RO	0x00 (0 _{dec})
7020:11	Reset Extended Diag Data		BOOLEAN	RO	0x00 (0 _{dec})

7030 DPO Outputs Ch.4 (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7030:0	DPO Outputs Ch.4		USINT	RO	0x6 (6 _{dec})
7030:01	Output Us	-	BOOL	RO	-
7030:02	Output Up	-	BOOL	RO	-
7030:05	Reset Us	-	BOOL	RO	-
7030:06	Reset Up	-	BOOL	RO	-

Index 7030 DPO Outputs Ch.4 (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
7030:0	DPO Outputs Ch.4		UINT8	RO	0x11 (17 _{dec})
7030:01	Output Us		BOOLEAN	RO	0x00 (0 _{dec})
7030:02	Output Up		BOOLEAN	RO	0x00 (0 _{dec})
7030:05	Reset Us		BOOLEAN	RO	0x00 (0 _{dec})
7030:06	Reset Up		BOOLEAN	RO	0x00 (0 _{dec})
7030:11	Reset Extended Diag Data		BOOLEAN	RO	0x00 (0 _{dec})

Index 7040 LOG Control

Index (hex)	Name	Meaning	Data type	Flags	Default
7040:0	LOG Control		UINT8	RO	0x02 (2 _{dec})
7040:01	Start Logger		BOOLEAN	RO	0x00 (0 _{dec})
7040:02	Stop Logger		BOOLEAN	RO	0x00 (0 _{dec})

Index 800F DPO Vendor data Ch.1

Index (hex)	Name	Meaning	Data type	Flags	Default
800F:0	DPO Vendor data Ch.1		UINT8	RO	0x14 (20 _{dec})
800F:11	GainS		UINT16	RW	0x4000 (16384 _{dec})
800F:12	OffsetS		INT16	RW	0x0000 (0 _{dec})
800F:13	GainP		UINT16	RW	0x4000 (16384 _{dec})
800F:14	OffsetP		INT16	RW	0x0000 (0 _{dec})

Index 801F DPO Vendor data Ch.2

Index (hex)	Name	Meaning	Data type	Flags	Default
801F:0	DPO Vendor data Ch.2		UINT8	RO	0x14 (20 _{dec})
801F:11	GainS		UINT16	RW	0x4000 (16384 _{dec})
801F:12	OffsetS		INT16	RW	0x0000 (0 _{dec})
801F:13	GainP		UINT16	RW	0x4000 (16384 _{dec})
801F:14	OffsetP		INT16	RW	0x0000 (0 _{dec})

Index 802F DPO Vendor data Ch.3

Index (hex)	Name	Meaning	Data type	Flags	Default
802F:0	DPO Vendor data Ch.3		UINT8	RO	0x14 (20 _{dec})
802F:11	GainS		UINT16	RW	0x4000 (16384 _{dec})
802F:12	OffsetS		INT16	RW	0x0000 (0 _{dec})
802F:13	GainP		UINT16	RW	0x4000 (16384 _{dec})
802F:14	OffsetP		INT16	RW	0x0000 (0 _{dec})

Index 803F DPO Vendor data Ch.4

Index (hex)	Name	Meaning	Data type	Flags	Default
803F:0	DPO Vendor data Ch.4		UINT8	RO	0x14 (20 _{dec})
803F:11	GainS		UINT16	RW	0x4000 (16384 _{dec})
803F:12	OffsetS		INT16	RW	0x0000 (0 _{dec})
803F:13	GainP		UINT16	RW	0x4000 (16384 _{dec})
803F:14	OffsetP		INT16	RW	0x0000 (0 _{dec})

Index F000 Modular Device Profile

Index (hex)	Name	Meaning	Data type	Flags	Default
F000:0	Modular Device Profile	General information for the Modular Device Profile	UINT8	RO	0x02 (2 _{dec})
F000:01	Index distance	Index distance of the objects of the individual channels	UINT16	RO	0x0010 (16 _{dec})
F000:02	Maximum number of modules	Number of channels	UINT16	RO	0x0005 (5 _{dec})

Index F008 Code word

Index (hex)	Name	Meaning	Data type	Flags	Default
F008:0	Code word		UINT32	RW	0x00000000 (0 _{dec})

Index F010 Module Profile List

Index (hex)	Name	Meaning	Data type	Flags	Default
F010:0	Module Profile List		UINT8	RO	0x05 (5 _{dec})
F010:01	SubIndex 001		UINT32	RO	0x0000010E (270 _{dec})
F010:02	SubIndex 002		UINT32	RO	0x0000010E (270 _{dec})
F010:03	SubIndex 003		UINT32	RO	0x0000010E (270 _{dec})
F010:04	SubIndex 004		UINT32	RO	0x0000010E (270 _{dec})
F010:05	SubIndex 005		UINT32	RO	0x00000384 (900 _{dec})

F607 DPO Inputs Device (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
F607:0	DPO Inputs Device		USINT	RO	0x10 (16 _{dec})
F607:01	Temperature Warning	-	BOOL	RO	-
F607:02	Temperature Error	-	BOOL	RO	-
F607:03	Us Warning	-	BOOL	RO	-
F607:04	Us Error	-	BOOL	RO	-
F607:05	Up Warning	-	BOOL	RO	-
F607:06	Up Error	-	BOOL	RO	-
F607:07	Global Error Bit	-	BOOL	RO	-
F607:0C	Reset Input	-	BOOL	RO	-
F607:0F	TxPDO State	-	BOOL	RO	-
F607:10	TxPDO Toggle	-	BOOL	RO	-

Index F607 DPO Inputs Device (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
F607:0	DPO Inputs Device		UINT8	RO	0x19 (25 _{dec})
F607:01	Warning Temperature		BOOLEAN	RO	0x00 (0 _{dec})
F607:02	Error Temperature		BOOLEAN	RO	0x00 (0 _{dec})
F607:03	Warning Us		BOOLEAN	RO	0x00 (0 _{dec})
F607:04	Error Us		BOOLEAN	RO	0x00 (0 _{dec})
F607:05	Warning Up		BOOLEAN	RO	0x00 (0 _{dec})
F607:06	Error Up		BOOLEAN	RO	0x00 (0 _{dec})
F607:07	Global Error Bit		BOOLEAN	RO	0x00 (0 _{dec})
F607:08	Warning Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
F607:09	Error Sum Current		BOOLEAN	RO	0x00 (0 _{dec})
F607:0F	TxPDO State		BOOLEAN	RO	0x00 (0 _{dec})
F607:10	TxPDO Toggle		BOOLEAN	RO	0x00 (0 _{dec})
F607:11	Current Us		INT16	RO	0x0000 (0 _{dec})
F607:12	Current Up		INT16	RO	0x0000 (0 _{dec})
F607:13	Voltage Us		INT16	RO	0x0000 (0 _{dec})
F607:14	Voltage Up		INT16	RO	0x0000 (0 _{dec})
F607:15	Temperature		INT16	RO	0x0000 (0 _{dec})
F607:16	Peak Value 1		INT16	RO	0x0000 (0 _{dec})
F607:17	Peak Value 2		INT16	RO	0x0000 (0 _{dec})
F607:18	Timestamp 1		UINT64	RO	
F607:19	Timestamp 2		UINT64	RO	

F707 DPO Outputs Device (EP9214-0023, EP9214-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
F707:0	DPO Outputs Device		USINT	RO	0x4 (4 _{dec})
F707:01	Enable Control Via Fieldbus	-	BOOL	RO	-
F707:04	Global Reset	-	BOOL	RO	-

Index F707 DPO Outputs Device (EP9224-0023, EP9224-0024)

Index (hex)	Name	Meaning	Data type	Flags	Default
F707:0	DPO Outputs Device		UINT8	RO	0x11 (17 _{dec})
F707:01	Enable Control Via Fieldbus	0 _{bin} : All outputs are set according to their default values (80n0:02, 80n0:03) 1 _{bin} : All outputs are set according to their PDOs (70n0:01, 70n0:02) See chapter Switch output voltages [► 57].	BOOLEAN	RO	0x00 (0 _{dec})
F707:04	Global Reset	Reset all errors.	BOOLEAN	RO	0x00 (0 _{dec})
F707:11	Reset Extended Diag Data	Reset all values of the peak value detector. See chapter Peak value detector [► 54].	BOOLEAN	RO	0x00 (0 _{dec})

Index F81F DPO Vendor Data Device

Index (hex)	Name	Meaning	Data type	Flags	Default
F81F:0	DPO Vendor Data Device		UINT8	RO	0x1A (26 _{dec})
F81F:10	Enable Calibration Mode		BOOLEAN	RW	0x00 (0 _{dec})
F81F:11	GainS		UINT16	RW	0x4000 (16384 _{dec})
F81F:12	OffsetS		INT16	RW	0x0000 (0 _{dec})
F81F:13	GainP		UINT16	RW	0x4000 (16384 _{dec})
F81F:14	OffsetP		INT16	RW	0x0000 (0 _{dec})
F81F:15	Gain US		UINT16	RW	0x4000 (16384 _{dec})
F81F:16	Offset US		INT16	RW	0x0000 (0 _{dec})
F81F:17	Gain UP		UINT16	RW	0x4000 (16384 _{dec})
F81F:18	Offset UP		INT16	RW	0x0000 (0 _{dec})
F81F:19	Gain Temperature		UINT16	RW	0x4000 (16384 _{dec})
F81F:1A	Offset Temperature		INT16	RW	0x0000 (0 _{dec})

7 Appendix

7.1 General operating conditions

Protection rating according to IP code

The degrees of protection are defined and divided into different classes in the IEC 60529 standard (EN 60529). Degrees of protection are designated by the letters "IP" and two numerals: **IPxy**

- Numeral x: Dust protection and contact protection
- Numeral y: Protection against water

x	Meaning
0	Not protected
1	Protected against access to dangerous parts with the back of the hand. Protected against solid foreign objects of 50 mm Ø
2	Protected against access to dangerous parts with a finger. Protected against solid foreign objects of 12.5 mm Ø
3	Protected against access to dangerous parts with a tool. Protected against solid foreign objects of 2.5 mm Ø
4	Protected against access to dangerous parts with a wire. Protected against solid foreign objects of 1 mm Ø
5	Protection against access to dangerous parts with a wire. Dust-protected. Ingress of dust is not prevented completely, although the quantity of dust able to penetrate is limited to such an extent that the proper function of the device and safety are not impaired
6	Protection against access to dangerous parts with a wire. Dust-tight. No ingress of dust

y	Meaning
0	Not protected
1	Protection against vertically falling water drops
2	Protection against vertically falling water drops when enclosure tilted up to 15°
3	Protection against spraying water. Water sprayed at an angle of up to 60° on either side of the vertical shall have no harmful effects
4	Protection against splashing water. Water splashed against the enclosure from any direction shall have no harmful effects
5	Protection against water jets.
6	Protection against powerful water jets.
7	Protected against the effects of temporary immersion in water. Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is immersed in water at a depth of 1 m for 30 minutes

Chemical resistance

The resistance refers to the housing of the IP67 modules and the metal parts used. In the table below you will find some typical resistances.

Type	Resistance
Water vapor	unstable at temperatures > 100 °C
Sodium hydroxide solution (ph value > 12)	stable at room temperature unstable > 40 °C
Acetic acid	unstable
Argon (technically pure)	stable

Key

- resistant: Lifetime several months
- non inherently resistant: Lifetime several weeks
- not resistant: Lifetime several hours resp. early decomposition

7.2 Accessories

Labeling material, protective caps

Ordering information	Description
ZS5000-0010	Protective cap for M8 sockets, IP67 (50 pieces)
ZS5100-0000	Inscription labels, unprinted, 4 strips of 10
ZS5000-xxxx	Printed inscription labels on enquiry

Cables

A complete overview of pre-assembled cables can be found on the Beckhoff website: [Link](#).

Ordering information	Description	Link
ZK1090-3xxx-xxxx	EtherCAT cable M8, green	Website
ZK1093-3xxx-xxxx	EtherCAT cable M8, yellow	Website
ZK2000-2xxx-xxxx	Sensor cable M8, 3-pin	Website
ZK2020-3xxx-xxxx	Power cable M8, 4-pin	Website
ZK203x-xxxx-xxxx	Power cable 7/8", 5-pin	Website
ZK205x-xxxx-xxxx	Power cable M12, 5-pin, L-coded	Website

Tools

Ordering information	Description
ZB8801-0000	Torque wrench for plugs, 0.4...1.0 Nm
ZB8801-0001	Torque cable key for M8 / wrench size 9 for ZB8801-0000



Further accessories

Further accessories can be found in the price list for fieldbus components from Beckhoff and online at <https://www.beckhoff.com>.

7.3 Version identification of EtherCAT devices

7.3.1 General notes on marking

Designation

A Beckhoff EtherCAT device has a 14-digit designation, made up of

- family key
- type
- version
- revision

Example	Family	Type	Version	Revision
EL3314-0000-0016	EL terminal 12 mm, non-pluggable connection level	3314 4-channel thermocouple terminal	0000 basic type	0016
ES3602-0010-0017	ES terminal 12 mm, pluggable connection level	3602 2-channel voltage measurement	0010 high-precision version	0017
CU2008-0000-0000	CU device	2008 8-port fast ethernet switch	0000 basic type	0000

Notes

- The elements mentioned above result in the **technical designation**. EL3314-0000-0016 is used in the example below.
- EL3314-0000 is the order identifier, in the case of "-0000" usually abbreviated to EL3314. "-0016" is the EtherCAT revision.
- The **order identifier** is made up of
 - family key (EL, EP, CU, ES, KL, CX, etc.)
 - type (3314)
 - version (-0000)
- The **revision** -0016 shows the technical progress, such as the extension of features with regard to the EtherCAT communication, and is managed by Beckhoff.
In principle, a device with a higher revision can replace a device with a lower revision, unless specified otherwise, e.g. in the documentation.
Associated and synonymous with each revision there is usually a description (ESI, EtherCAT Slave Information) in the form of an XML file, which is available for download from the Beckhoff web site.
From 2014/01 the revision is shown on the outside of the IP20 terminals, see Fig. "EL2872 with revision 0022 and serial number 01200815".
- The type, version and revision are read as decimal numbers, even if they are technically saved in hexadecimal.

7.3.2 Version identification of IP67 modules

The serial number/ data code for Beckhoff IO devices is usually the 8-digit number printed on the device or on a sticker. The serial number indicates the configuration in delivery state and therefore refers to a whole production batch, without distinguishing the individual modules of a batch.

Structure of the serial number: **KK YY FF HH**

KK - week of production (CW, calendar week)

YY - year of production

FF - firmware version

HH - hardware version

Example with serial number 12 06 3A 02:

12 - production week 12

06 - production year 2006

3A - firmware version 3A

02 - hardware version 02

Exceptions can occur in the **IP67 area**, where the following syntax can be used (see respective device documentation):

Syntax: D ww yy x y z u

D - prefix designation

ww - calendar week

yy - year

x - firmware version of the bus PCB

y - hardware version of the bus PCB

z - firmware version of the I/O PCB

u - hardware version of the I/O PCB

Example: D.22081501 calendar week 22 of the year 2008 firmware version of bus PCB: 1 hardware version of bus PCB: 5 firmware version of I/O PCB: 0 (no firmware necessary for this PCB) hardware version of I/O PCB: 1

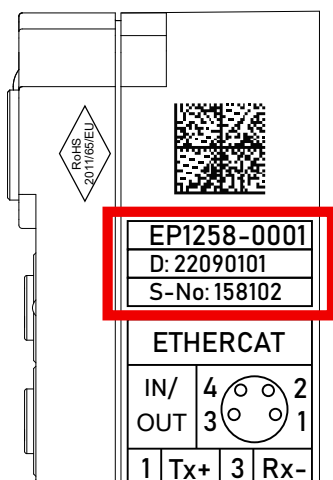


Fig. 9: EP1258-00001 IP67 EtherCAT Box with batch number/DateCode 22090101 and unique serial number 158102

7.3.3 Beckhoff Identification Code (BIC)

The Beckhoff Identification Code (BIC) is increasingly being applied to Beckhoff products to uniquely identify the product. The BIC is represented as a Data Matrix Code (DMC, code scheme ECC200), the content is based on the ANSI standard MH10.8.2-2016.

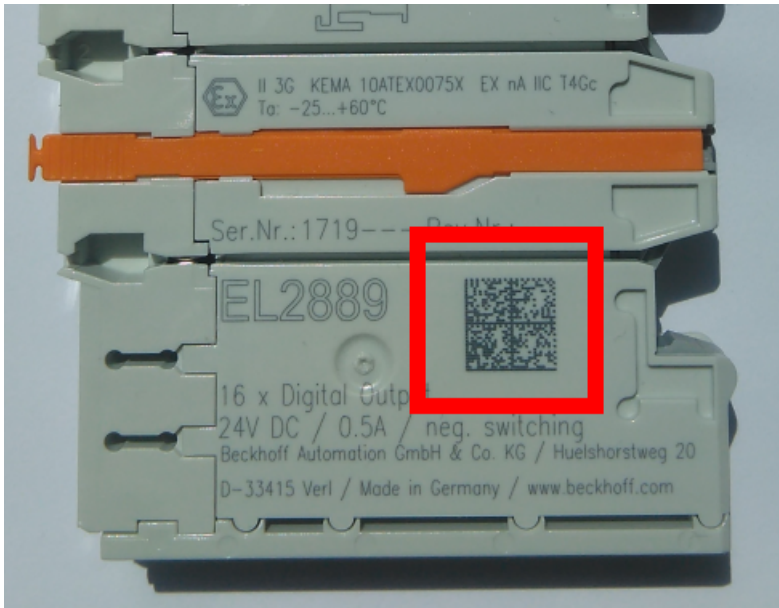


Fig. 10: BIC as data matrix code (DMC, code scheme ECC200)

The BIC will be introduced step by step across all product groups.

Depending on the product, it can be found in the following places:

- on the packaging unit
- directly on the product (if space suffices)
- on the packaging unit and the product

The BIC is machine-readable and contains information that can also be used by the customer for handling and product management.

Each piece of information can be uniquely identified using the so-called data identifier (ANSI MH10.8.2-2016). The data identifier is followed by a character string. Both together have a maximum length according to the table below. If the information is shorter, spaces are added to it.

Following information is possible, positions 1 to 4 are always present, the other according to need of production:

Position	Type of information	Explanation	Data identifier	Number of digits incl. data identifier	Example
1	Beckhoff order number	Beckhoff order number	1P	8	1P 072222
2	Beckhoff Traceability Number (BTN)	Unique serial number, see note below	SBTN	12	SBTN k4p562d7
3	Article description	Beckhoff article description, e.g. EL1008	1K	32	1K EL1809
4	Quantity	Quantity in packaging unit, e.g. 1, 10, etc.	Q	6	Q1
5	Batch number	Optional: Year and week of production	2P	14	2P 401503180016
6	ID/serial number	Optional: Present-day serial number system, e.g. with safety products	51S	12	51S 678294
7	Variant number	Optional: Product variant number on the basis of standard products	30P	12	30P F971, 2*K183
...					

Further types of information and data identifiers are used by Beckhoff and serve internal processes.

Structure of the BIC

Example of composite information from positions 1 to 4 and with the above given example value on position 6. The data identifiers are highlighted in bold font:

1P072222**SBTN**k4p562d7**1K**EL1809 **Q1** **51S**678294

Accordingly as DMC:



Fig. 11: Example DMC **1P**072222**SBTN**k4p562d7**1K**EL1809 **Q1** **51S**678294

BTN

An important component of the BIC is the Beckhoff Traceability Number (BTN, position 2). The BTN is a unique serial number consisting of eight characters that will replace all other serial number systems at Beckhoff in the long term (e.g. batch designations on IO components, previous serial number range for safety products, etc.). The BTN will also be introduced step by step, so it may happen that the BTN is not yet coded in the BIC.

NOTICE

This information has been carefully prepared. However, the procedure described is constantly being further developed. We reserve the right to revise and change procedures and documentation at any time and without prior notice. No claims for changes can be made from the information, illustrations and descriptions in this documentation.

7.3.4 Electronic access to the BIC (eBIC)

Electronic BIC (eBIC)

The Beckhoff Identification Code (BIC) is applied to the outside of Beckhoff products in a visible place. If possible, it should also be electronically readable.

The interface that the product can be electronically addressed by is crucial for the electronic readout.


EtherCAT devices (IP20, IP67)

All Beckhoff EtherCAT devices have an ESI-EEPROM which contains the EtherCAT identity with the revision number. The EtherCAT slave information, also colloquially known as the ESI/XML configuration file for the EtherCAT master, is stored in it. See the corresponding chapter in the EtherCAT system manual ([Link](#)) for the relationships.

Beckhoff also stores the eBIC in the ESI-EEPROM. The eBIC was introduced into Beckhoff IO production (terminals, box modules) in 2020; as of 2023, implementation is largely complete.

The user can electronically access the eBIC (if present) as follows:

- With all EtherCAT devices, the EtherCAT master (TwinCAT) can read the eBIC from the ESI-EEPROM
 - From TwinCAT 3.1 build 4024.11, the eBIC can be displayed in the online view.
 - To do this, check the "Show Beckhoff Identification Code (BIC)" checkbox under EtherCAT → Advanced Settings → Diagnostics:

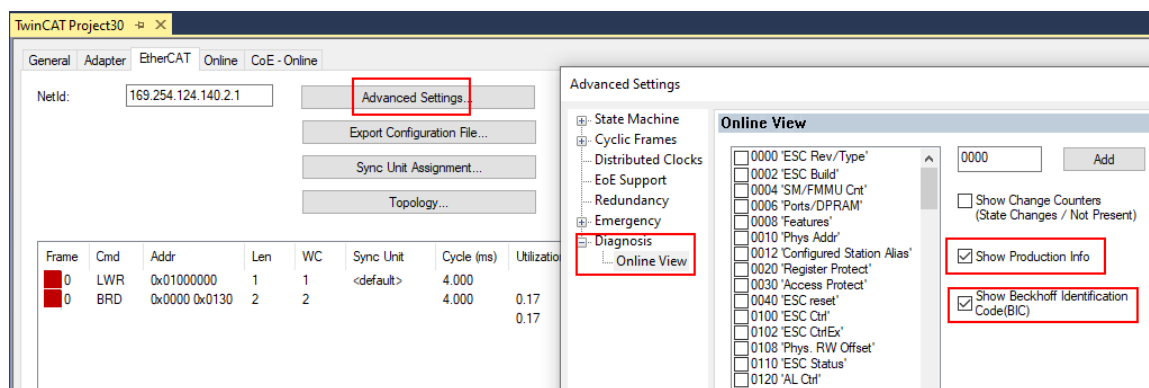

- The BTN and its contents are then displayed:

No	Addr	Name	State	CRC	Fw	Hw	Production Data	ItemNo	BTN	Description	Quantity	BatchNo	SerialNo
1	1001	Term 1 (EK1100)	OP	0, 0	0	0	—	—	—	—	—	—	—
2	1002	Term 2 (EL1018)	OP	0, 0	0	0	2020 KW36 Fr	072222	k4p562d7	EL1809	1	—	678294
3	1003	Term 3 (EL3204)	OP	0, 0	7	6	2012 KW24 Sa	—	—	—	—	—	—
4	1004	Term 4 (EL2004)	OP	0, 0	0	0	—	072223	k4p562d7	EL2004	1	—	678295
5	1005	Term 5 (EL1008)	OP	0, 0	0	0	—	—	—	—	—	—	—
6	1006	Term 6 (EL2008)	OP	0, 0	0	12	2014 KW14 Mo	—	—	—	—	—	—
7	1007	Term 7 (EK1110)	OP	0	1	8	2012 KW25 Mo	—	—	—	—	—	—

- Note: As shown in the figure, the production data HW version, FW version, and production date, which have been programmed since 2012, can also be displayed with "Show production info".
- Access from the PLC: From TwinCAT 3.1. build 4024.24, the functions *FB_EcReadBIC* and *FB_EcReadBTN* for reading into the PLC are available in the Tc2_EtherCAT library from v3.3.19.0.
- EtherCAT devices with a CoE directory may also have the object 0x10E2:01 to display their own eBIC, which can also be easily accessed by the PLC:

- The device must be in PREOP/SAFEOP/OP for access:

Index	Name	Flags	Value
1000	Device type	RO	0x015E1389 (22942601)
1008	Device name	RO	ELM3704-0000
1009	Hardware version	RO	00
100A	Software version	RO	01
100B	Bootloader version	RO	J0.1.27.0
+ 1011:0	Restore default parameters	RO	> 1 <
+ 1018:0	Identity	RO	> 4 <
- 10E2:0	Manufacturer-specific Identification C...	RO	> 1 <
10E2:01	SubIndex 001	RO	1P158442SBTN0008jekp1KELM3704 Q1 2P482001000016
+ 10F0:0	Backup parameter handling	RO	> 1 <
+ 10F3:0	Diagnosis History	RO	> 21 <
10F8	Actual Time Stamp	RO	0x170bf6277e

- The object 0x10E2 will be preferentially introduced into stock products in the course of necessary firmware revision.
- From TwinCAT 3.1. build 4024.24, the functions *FB_EcCoEReadBIC* and *FB_EcCoEReadBTN* for reading into the PLC are available in the Tc2_EtherCAT library from v3.3.19.0
- The following auxiliary functions are available for processing the BIC/BTN data in the PLC in *Tc2_Uilities* as of TwinCAT 3.1 build 4024.24
 - *F_SplitBIC*: The function splits the Beckhoff Identification Code (BIC) sBICValue into its components using known identifiers and returns the recognized substrings in the ST_SplittedBIC structure as a return value
 - *BIC_TO_BTN*: The function extracts the BTN from the BIC and returns it as a return value
- Note: If there is further electronic processing, the BTN is to be handled as a string(8); the identifier "SBTN" is not part of the BTN.
- Technical background
The new BIC information is written as an additional category in the ESI-EEPROM during device production. The structure of the ESI content is largely dictated by the ETG specifications, therefore the additional vendor-specific content is stored using a category in accordance with the ETG.2010. ID 03 tells all EtherCAT masters that they may not overwrite these data in the event of an update or restore the data after an ESI update.
The structure follows the content of the BIC, see here. The EEPROM therefore requires approx. 50..200 bytes of memory.
- Special cases
 - If multiple hierarchically arranged ESCs are installed in a device, only the top-level ESC carries the eBIC information.
 - If multiple non-hierarchically arranged ESCs are installed in a device, all ESCs carry the eBIC information.
 - If the device consists of several sub-devices which each have their own identity, but only the top-level device is accessible via EtherCAT, the eBIC of the top-level device is located in the CoE object directory 0x10E2:01 and the eBICs of the sub-devices follow in 0x10E2:nn.

7.4 Support and Service

Beckhoff and their partners around the world offer comprehensive support and service, making available fast and competent assistance with all questions related to Beckhoff products and system solutions.

Beckhoff's branch offices and representatives

Please contact your Beckhoff branch office or representative for local support and service on Beckhoff products!

The addresses of Beckhoff's branch offices and representatives round the world can be found on her internet pages: www.beckhoff.com

You will also find further documentation for Beckhoff components there.

Support

The Beckhoff Support offers you comprehensive technical assistance, helping you not only with the application of individual Beckhoff products, but also with other, wide-ranging services:

- support
- design, programming and commissioning of complex automation systems
- and extensive training program for Beckhoff system components

Hotline: +49 5246 963 157
e-mail: support@beckhoff.com
web: www.beckhoff.com/support

Service

The Beckhoff Service Center supports you in all matters of after-sales service:

- on-site service
- repair service
- spare parts service
- hotline service

Hotline: +49 5246 963 460
e-mail: service@beckhoff.com
web: www.beckhoff.com/service

Headquarters Germany

Beckhoff Automation GmbH & Co. KG

Hülshorstweg 20
33415 Verl
Germany

Phone: +49 5246 963 0
e-mail: info@beckhoff.com
web: www.beckhoff.com

Trademark statements

Beckhoff®, ATRO®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, MX-System®, Safety over EtherCAT®, TC/BSD®, TwinCAT®, TwinCAT/BSD®, TwinSAFE®, XFC®, XPlanar® and XTS® are registered and licensed trademarks of Beckhoff Automation GmbH.

Beckhoff Automation GmbH & Co. KG
Hülshorstweg 20
33415 Verl
Germany
Phone: +49 5246 9630
info@beckhoff.com
www.beckhoff.com