

Inductive Proximity Sensor Specifications

Bulletin Numbers 802PR, 871C, 871D, 871F, 871FM, 871L, 871P, 871R, 871T, 871TM, 871TS, 871Z, 871ZC, 871ZT, 872C, 872L

Topic
Summary of Changes on page 1
Additional Resources on page 2
Inductive Proximity Sensors Basics on page 7
Tubular Sensors on page 28
Rectangular Sensors on page 135
Ring Sensors on page 231
Accessories on page 233
Accessories – Tubular Sensors on page 237
Accessories – VersaCube Sensors on page 250

Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes. Translated versions are not always available for each revision.

Topic	Location
Updated 871L and 872L 3-wire DC Rectangular Sensors product selection table.	Product Selection on page 189
Updated Ring Sensor section	871R 3-wire DC Ring Sensors on page 231

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation. You can view or download publications at rok.auto/literature.

Resource	Description
802PR Inductive Proximity Sensor Installation Instructions, publication 802PR-IN001	Provides information to install 802PR sensors.
871F Proximity Sensors Installation Instructions, publication 871F-IN001	Provides information to install 871F sensors.
871F 2-Wire AC/DC Proximity Sensors Installation Instructions, publication 871F-IN002	Provides information to install a 2-wire AC/DC 871F sensor.
871FM Inductive Sensors with IO-Link Interface, publication 871FM-UM001	Provides information to mount and install 871FM extended range sensors.
Miniature Metal Flat Pack Inductive Sensors with IO-Link User Manual, publication 871FM-UM002	Provides information to install, configure, and troubleshoot 871FM flat pack sensors.
871L AC/DC Limit Switch Style Inductive Proximity Sensor Installation Instructions, publication 871L-IN001	Provides information to install 871L AC/DC sensors.
871L DC Limit Switch Style Inductive Proximity Sensor Installation Instructions, publication 871L-IN002	Provides information to install 871L DC sensors.
871P DC Inductive Proximity Can Motion Sensor Installation Instructions, publication 871P-IN003	Provides information to install 871P sensors.
871P VersaCube Proximity Sensor Mounting and Wiring Instructions, publication 871P-IN002	Provides information to mount and wire 871P VersaCube® sensors.
871P VersaCube Proximity Sensor Installation Instructions, publication 871P-IN004	Provides information to install 871P VersaCube sensors.
871C Miniature Inductive Sensors with IO-Link Interface User Manual, publication 871C-UM001	Provides information to install, configure, and troubleshoot 871C sensors.
Safety Guidelines for the Application, Installation, and Maintenance of Solid-state Control, publication SGI-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, rok.auto/certifications .	Provides declarations of conformity, certificates, and other certification details.

Terminology

Active Face

Portion of the sensor from which the electromagnetic field or ultrasonic pulse emanates.

Axial Approach

The approach of the target with its center maintained on the reference axis.

Complementary Outputs

A proximity sensor that features both normally open (N.O.) and normally closed (N.C.) outputs, which can be used simultaneously.

Correction Factors

Suggested multiplication factors that take variations in the target material composition into account. When figuring actual sensing distance, multiply this factor with the nominal sensing distance.

Current Consumption

The current consumed by the proximity switch when the output device is in the off condition.

Damping Material

Material that causes a decrease in the strength of the electromagnetic or electrical field that the sensing coil produces.

Differential Travel (Hysteresis)

The distance between the operating point and the release point. (See [Hysteresis on page 3.](#))

Dual Output

Sensor that has two outputs, which can be complementary or of one type (that is, two N.O. or two N.C.).

Effective Operating Distance (Sr)

The operating distance of an individual proximity switch measured at a stated temperature, voltage, and mounting condition.

False Pulse

An undesired change in the state of the output of the proximity switch that lasts for more than 2 milliseconds.

Flush Mounting

A shielded proximity sensor that can be flush mounted in metal up to the plane of the active sensing face.

Free Zone

The area around the proximity switch that must be kept free from any damping material.

Hysteresis

The difference, in percentage (%), of the nominal sensing distance between the operate (switch ON) and release point (switch OFF) when the target is moving away from the sensor's active face. Without sufficient hysteresis, a proximity sensor chatters (continuously switches on and off) when significant vibration is applied to the target or sensor.

Isolated Output

An output that is optically separated from the input and other output and independent of the other output to a specified level.

Isolation Voltage

Maximum rated voltage between isolated outputs or input and output.

Lateral Approach

The approach of the target perpendicular to the reference axis.

Leakage Current

Current that flows through the output when the output is in an off condition or de-energized. This current is necessary to supply power to the electronics of the sensor.

Light-emitting Diode (LED)

Semi-conductor that generates monochromatic light when current flows in the conductive direction. An LED is the standard light source for most photoelectric sensors. Shown as  in wiring diagrams.

Maximum Inrush Current

The maximum current level at which the proximity sensor can be operated for a short time.

Maximum Load Current

The maximum current level at which the proximity sensor can be continuously operated.

Micro Connector

- 3-pin



- 4-pin



Mini Connector

- 3-pin



- 4-pin



Minimum Load Current

The minimum amount of current required by the sensor to maintain reliable operation.

Nonferrous Metal

Any metal that does not contain iron.

Normally Closed (N.C.)

Output opens when an object is detected in the active switching area.




Normally Open (N.O.)

Output closes when an object is detected in the active switching area.



NPN/Sinking

The sensor switches the load to the negative terminal. Connect the load between the sensor output and positive terminal.



Operating Distance, Assured


0...81% of the rated operating distance for inductive proximity switches.

Operating Distance, Rated

The operating distance that the manufacturer specifies and is used as a reference value. Also known as nominal sensing distance.

PNP/Sourcing

The sensor switches the load to the positive terminal. Connect the load between the sensor output and negative terminal.



Programmable Output (N.O. or N.C.)

Output which can be changed from N.O. to N.C. or N.C. to N.O. by way of a switch or jumper wire. Also known as selectable output.

Repeatability

The variation of the effective operating distance that is measured at room temperature and constant supply voltage. It is expressed as a percentage of the sensing distance.

Residual Voltage

The voltage across the sensor output while energized and carrying maximum load current.

Response Time

The sum of the time needed for a string of electronic circuits to translate a change in light into a change of output status.

Reverse Polarity Protection

A circuit that uses a diode to avoid damage to the control in case the polarity of the power supply is accidentally reversed.

Ripple

The variance between peak-to-peak values in DC voltage. It is expressed in percentage of rated voltage.

Sensing Distance


The distance at which an approaching target activates (changes the state of) the proximity output.

Sensing Range

The sensing range is the distance within which the sensor detects a target under fluctuations of temperature and voltage.

Shielded

Sensor that can be flush mounted in metal up to the plane of the active sensing face.



Short Circuit Protection (SCP)

Sensor that is protected from damage when a shorted condition exists for an indefinite or defined period.

Switching Frequency

The maximum number of times per second the sensor can change state (ON and OFF) usually expressed in Hertz (Hz). As measured in DIN EN 50010.

Target

Object that activates the sensor.

Three-wire Proximity Switch


An AC or DC proximity sensor with three leads, two of which supply power and a third that switches the load.

Two-wire Proximity Switch

A proximity sensor that switches a load that is connected in series to the power supply. Power for the proximity switch is always obtained through the load.

Unshielded

Sensors that have longer sensing distances and a wider magnetic field but are sensitive to surrounding metal.



Voltage Drop

The maximum voltage drop across a conducting sensor.

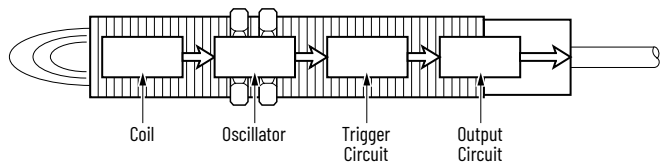
Voltage Symbols

- AC (⌚)
- AC/DC (⌚)
- DC (—)


Weld Field Immunity (WFI)

The ability of a sensor not to false trigger in the presence of strong electromagnetic fields.

Inductive Proximity Sensors Basics




Inductive proximity sensors are designed to operate by generating an electromagnetic field and detecting the eddy current losses that are generated when ferrous and nonferrous metal target objects enter the field. The sensor consists of a coil on a ferrite core, an oscillator, a trigger-signal level detector, and an output circuit. As a metal object advances into the field, eddy currents are induced in the target. The result is a loss of energy and a smaller amplitude of oscillation. The detector circuit then recognizes a specific change in amplitude and generates a signal that turns the solid-state output ON or OFF.

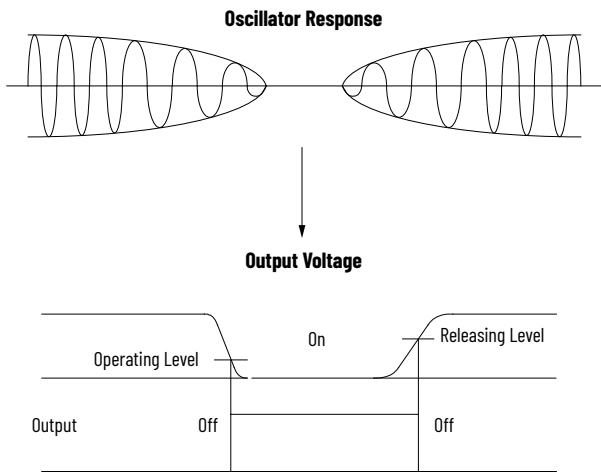

A metal target that approaches an inductive proximity sensor absorbs the energy that the oscillator generates. When the target is in close range, the energy drain stops the oscillator and changes the output state.

Standard Target

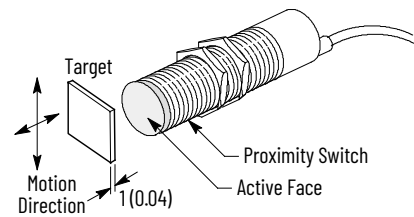Figure 1. Standard Target [mm (in.)]



The active face of an inductive proximity switch is the surface where a high-frequency electromagnetic field emerges.

A standard target is a mild steel square, 1 mm (0.04 in.) thick, with side lengths equal to the diameter of the active face or three times the nominal switching distance, whichever is greater.

Target Correction Factors

To determine the sensing distance for materials other than the standard mild steel, a correction factor is used. The composition of the target has a large effect on the sensing distance of inductive proximity sensors. If a target constructed from one of the materials that are listed in the following table is used, multiply the nominal sensing distance by the correction factor that is listed to determine the nominal

sensing distance for that target. Ferrous-selective sensors do not detect brass, aluminum, or copper, while nonferrous selective sensors do not detect steel or ferrous-type stainless steels.

The correction factors that are listed in the following table can be used as a general guideline. Common materials and their specific correction factors are listed on each product specification page.

Nominal Sensing Range x Correction Factor = Sensing Range

Table 1. Correction Factors

Target Material	Approximate Correction Factor
Mild steel	1.0
Stainless steel	0.85
Brass	0.50
Aluminum	0.45
Copper	0.40

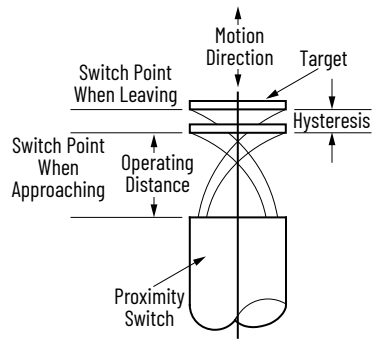
The size and shape of the target can also affect the sensing distance. Use the following as a general guideline when correcting for the size and shape of a target:

- Flat targets are preferable
- Rounded targets can reduce the sensing distance
- Nonferrous materials usually reduce the sensing distance for all-metal sensing models
- Targets smaller than the sensing face typically reduce the sensing distance
- Targets larger than the sensing face can increase the sensing distance
- Foils can increase the sensing distance

Hysteresis (Differential Travel)


The difference between the operate and release points is called hysteresis or differential travel. The amount of target travel that is required for release after operation must be accounted for when you select target and sensor locations. Hysteresis is required to help prevent chattering (turning on and off rapidly) when the sensor is subjected to shock and vibration or when the target is stationary at the nominal sensing distance.

Vibration amplitudes must be smaller than the hysteresis band to avoid chatter.



Switching Frequency

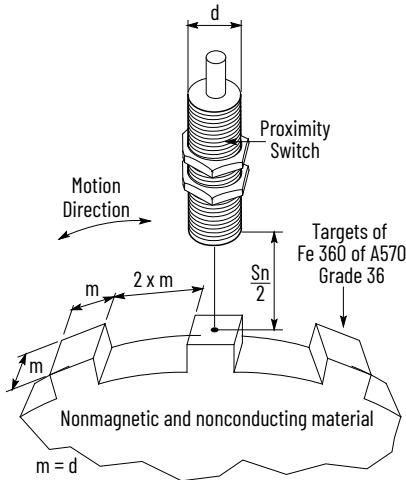
The switching frequency is the maximum speed at which a sensor delivers discrete individual pulses as the target enters and leaves the sensing field. This value is always dependent on target size, distance from sensing face, speed of target, and switch type. This value indicates the maximum possible number of switching operations per second. IEC 60947-5-2 specifies the measuring method for determining switching frequency with standard targets.



Ripple

Ripple is the alternating voltage that is superimposed on the DC voltage (peak-to-peak) in percent (%).

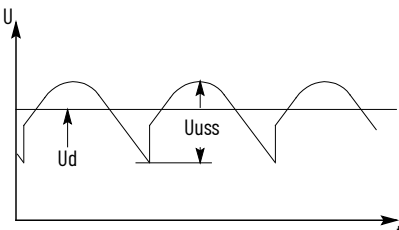For the operation of DC voltage switches, a filtered DC voltage with a ripple of 10% maximum is required (according to DIN 41755).



Mounting Considerations for Weld Field Immune Proximity Sensors

More reliable operation is dependent on the strength of the magnetic field and the distance between the current line and the sensor.

Figure 2. Perpendicular Mounting to the Current Line


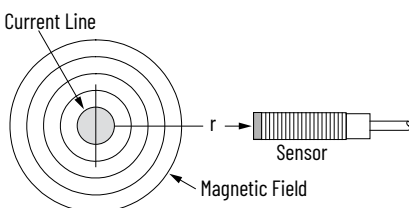


Figure 3. Parallel Mounting to the Current Line

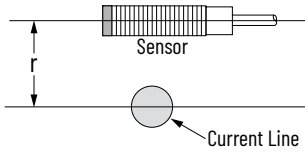


Use the following chart or formulas to determine the spacing requirements between the current line and proximity sensor. Select a distance that falls within the safe zone.

- $H = I/2\pi r$
- $B = H/0.796$
- Gauss - $10 \cdot B$

where:

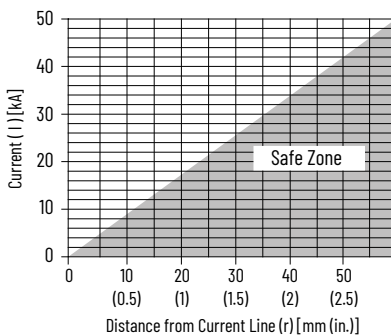- I = welding current (kA)
- H = field strength (kA/m)
- B = flux (mT)
- r = distance between sensor and current carrying lines (m)



Series Connected Sensors

Sensors can be connected in series with a load. For proper operation, the load voltage must be less than or equal to the minimum supply voltage minus the voltage drops across the seriesconnected proximity sensors.

Figure 4. Wiring Diagram for Series Connected Current Sink Sensors (NPN)


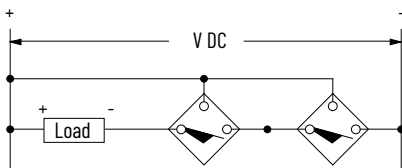


Figure 5. Wiring Diagram for Series Connected Current Source Sensors (PNP)

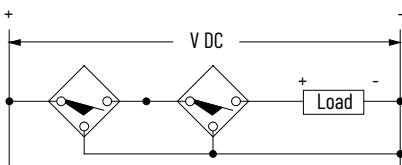


Parallel Connected Sensors

Sensors can be connected in parallel to energize a load. To determine the maximum allowable number of sensors for an application, the sum of the maximum leakage current of the sensors that are connected in parallel must be less than the maximum OFF-state current of the load device.




ATTENTION: Use care when designing parallel proximity circuits. If too much leakage current flows into the load it can cause the solidstate input to change state or a small relay not to drop out. Sensors that are connected in parallel do not provide a higher load current capability.

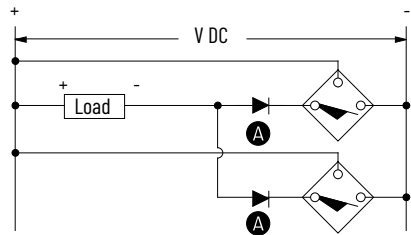Figure 6. Wiring Diagram for Parallel Connected Current Sink Sensors (NPN)




Item	Description
A	Add diode as shown to each output to maintain individual output indicator function.

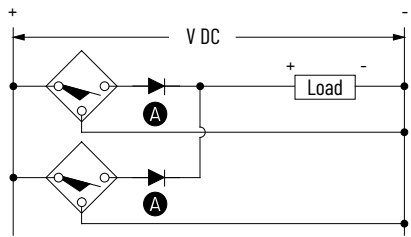Figure 7. Wiring Diagram for Parallel Connected Current Source Sensors (PNP)




Item	Description
A	Add diode as shown to each output to maintain individual output indicator function.

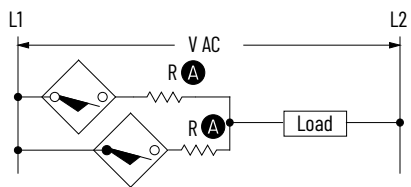Figure 8. Wiring Diagram for Parallel Connected AC Sensors



Item	Description
A	Add R in series with sensor to maintain minimum voltage when sensor is switching.

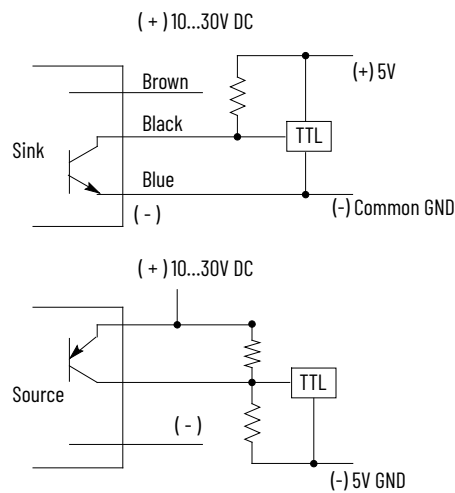TTL Wiring




ATTENTION: When using sourcing outputs, ground must be floating and cannot be common, or short circuit results.

Shielded vs. Unshielded Inductive Sensors


Shielded construction includes a metal band which surrounds the ferrite core and coil arrangement. Unshielded sensors do not have this metal band.

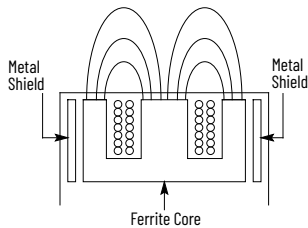Figure 9. Shielded Sensor



Shielded construction includes a metal band which surrounds the ferrite core and coil arrangement.

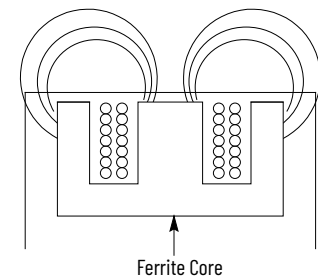Figure 10. Unshielded Sensor




Unshielded sensors do not have this metal band.

Space Between Shielded Sensors (Flush-mount) and Metal Surfaces

Shielded proximity sensors allow the electromagnetic field to be concentrated to the front of the sensor face. Shielded construction allows the proximity to be mounted flush in the surrounding metal without causing a false trigger.

Tubular Style

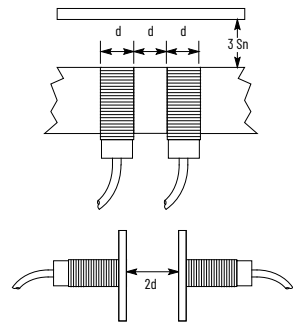
Figure 11. Tubular Style



d = diameter or width of active sensing face


S_n = nominal sensing distance

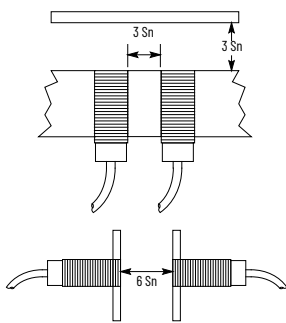Figure 12. Tubular Style Extended Sensing (Bul. 872C)



S_n = nominal sensing distance

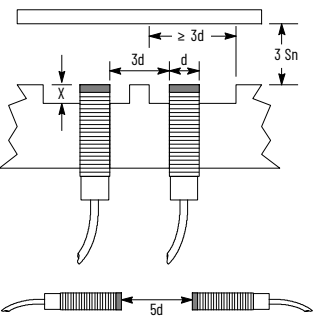Figure 13. Tubular-style Long-range Sensing (Bul. 872C)




d = diameter or width of active sensing face

S_n = nominal sensing distance

X = see following table

Sensing Face Diameter [mm (in.)]	Dimension X [mm (in.)]
6.5 (0.26)	1 (0.04)
12 (0.47)	2 (0.08)
18 (0.71)	4 (0.16)
30 (1.18)	6 (0.24)

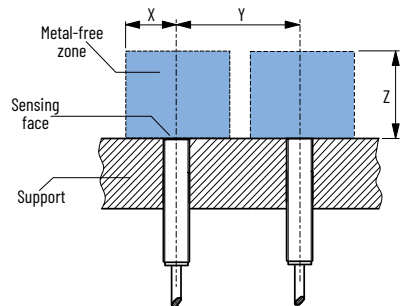
Figure 14. 871TM 3-wire DC Long Range Sensors Spacing



Sensor Diameter [mm (in.)]	Dimension [mm (in.)]		
	X	Y	Z
8 (0.31)	6 (0.24)	22 (0.87)	9 (0.35)
12 (0.47)	12 (0.47)	50 (1.97)	18 (0.71)
18 (0.71)	25 (0.98)	50 (1.97)	30 (1.18)
30 (1.18)	45 (1.77)	110 (4.33)	60 (2.36)


Limit Switch Style

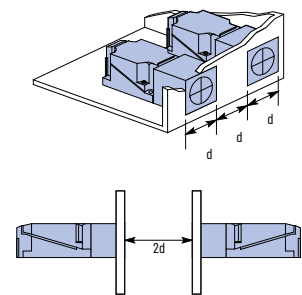Figure 15. Limit Switch Style (Bul. 871L/872L)



d = diameter or width of active sensing face

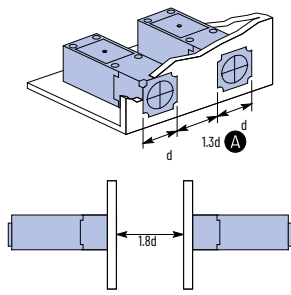Figure 16. Limit Switch Style (Bul. 802PR)




(A) Catalog numbers 802PR-LB or 802PR-XB can be mounted side by side.

d = diameter or width of active sensing face


Flat Pack Style

Figure 17. Flat Pack Style (Bul. 871F)




d = diameter or width of active sensing face

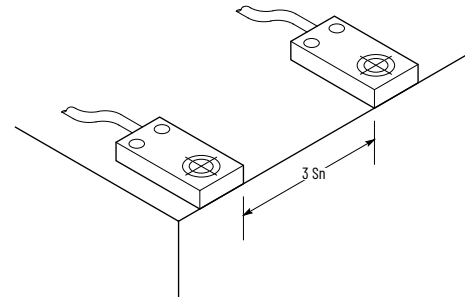Figure 18. Miniature Flat Pack Style (Bul. 871FM)



Sn = nominal sensing distance

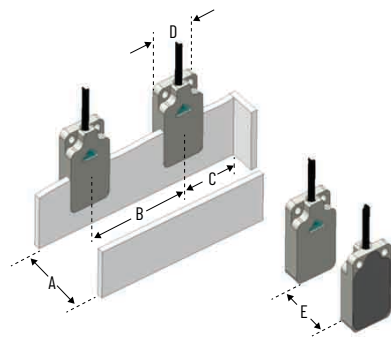
Figure 19. 871FM Miniature Metal Flat Pack Sensors Spacing



Sensor [WxLxH mm (in.)]	Dimension [mm (in.)]				
	A	B	C	D	E
20 x 32 x 8 (0.79 x 1.26 x 0.31) shielded, 7 (0.28) sensing	24 (0.94)	24 (0.94)	20 (0.79)	20 (0.79)	48 (1.89)
30 x 52 x 14 (1.18 x 2.05 x 0.55) shielded, 10 (0.39) sensing	45 (1.77)	45 (0.79)	30 (1.18)	30 (1.18)	90 (3.54)


Cube Style

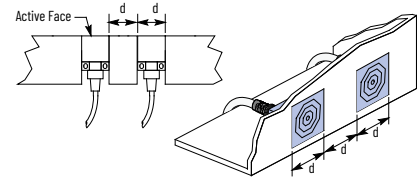Figure 20. 871P VersaCube® Sensor (2- and 3-wire)



d = diameter or width of active sensing face

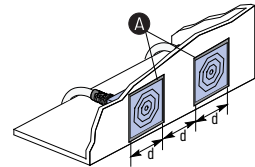Figure 21. 871P VersaCube Sensor (4-wire)




(A) See following table.

d = diameter or width of active sensing face

Surrounding Metal Thickness [mm (in.)]	Number of Sides	Orientation	Opening Required [mm (in.)]	Metal-free Clear Zone (Each Side) [mm (in.)]
< 3 (0.12)	4	Front sensing face with bracket on back	44 x 44 (1.73 x 1.73)	4 (0.16)
3 (0.12)	1, 2, or 3		40 x 40 (1.57 x 1.57)	None
≥ 3 (0.12)	4		41 x 41 (1.61 x 1.61)	1 (0.04)

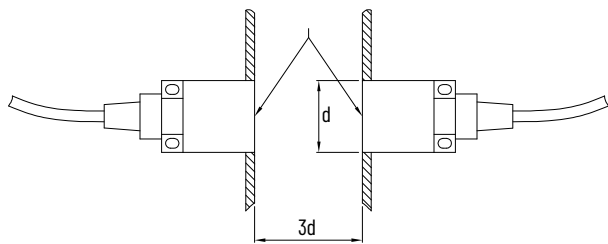Figure 22. Spacing Between Opposing Sensors




d = diameter or width of active sensing face

Space Between Unshielded Sensors (Nonflush-mount) and Metal Surfaces

Longer sensing distances can be obtained by using an unshielded sensor. Unshielded proximity sensors require a metal-free zone around the sensing face. Metal immediately opposite the sensing face must be no closer than three times the rated nominal sensing distance of the sensor.

Tubular Style

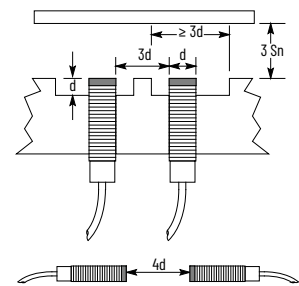
Figure 23. Tubular Style



d = diameter or width of active sensing face


Sn = nominal sensing distance

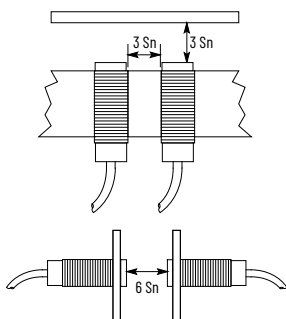Figure 24. Tubular Style Extended Sensing (Bul. 872C)



Sn = nominal sensing distance

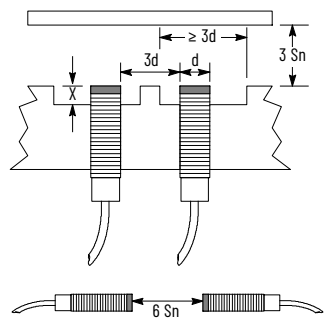Figure 25. Tubular-style Long-range Sensing (Bul. 872C)




(X) See following table.

d = diameter or width of active sensing face

Sn = nominal sensing distance

Sensing Face Diameter [mm (in.)]	Dimension X [mm (in.)]
8 (0.31)	8 (0.31)
12 (0.47)	13 (0.51)
18 (0.71)	20 (0.79)
30 (1.18)	35 (1.38)

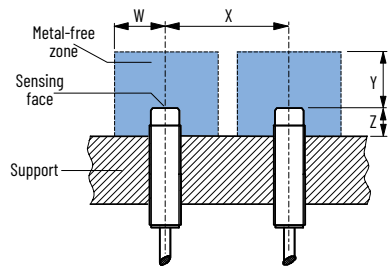Figure 26. 871TM 3-wire DC Long Range Sensors Spacing



Sensor Diameter [mm (in.)]	Dimensions [mm (in.)]			
	W	X	Y	Z
8 (0.31)	18 (0.71)	60 (2.36)	18 (0.71)	Aluminum: 9 (0.35) Steel: 14 (0.55) Brass: 10 (0.39) Stainless steel: 13 (0.51)
12 (0.47)	12 (0.47)	50 (1.97)	18 (0.71)	Aluminum: 13 (0.51) Steel: 21 (0.83) Brass: 14 (0.55)

Sensor Diameter [mm (in.)]	Dimensions [mm (in.)]			
	W	X	Y	Z
				Stainless steel: 20 (0.79)
18 (0.71)	25 (0.98)	50 (1.97)	30 (1.18)	Aluminum: 22 (0.87) Steel: 36 (1.42) Brass: 22 (0.87) Stainless steel: 43 (1.69)
30 (1.18)	45 (1.77)	110 (4.33)	60 (2.36)	Aluminum: 31 (1.22) Steel: 17 (0.67) Brass: 34 (1.34) Stainless steel: 17 (0.67)

Limit Switch Style

Figure 27. Limit Switch Style (Bul. 871L and 872L)


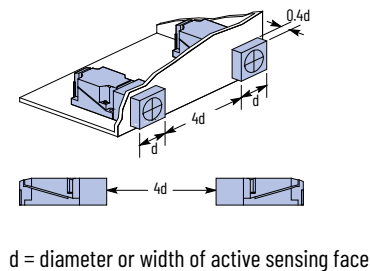


Figure 28. Limit Switch Style (Bul. 802PR)

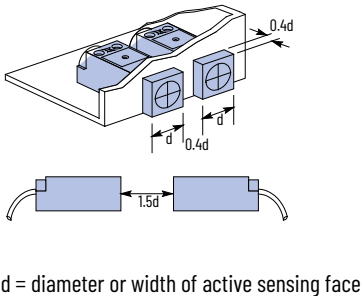

Flat Pack Style

Figure 29. Flat Pack Style (Bul. 871F)



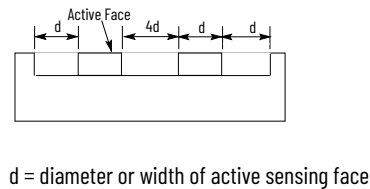


Figure 30. Miniature Flat Pack Style (Bul. 871FM)

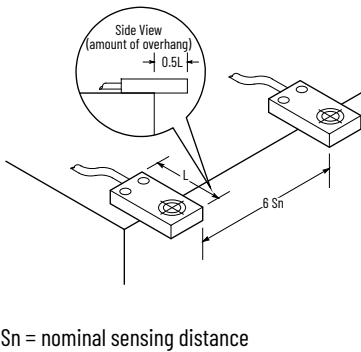


Cube Style

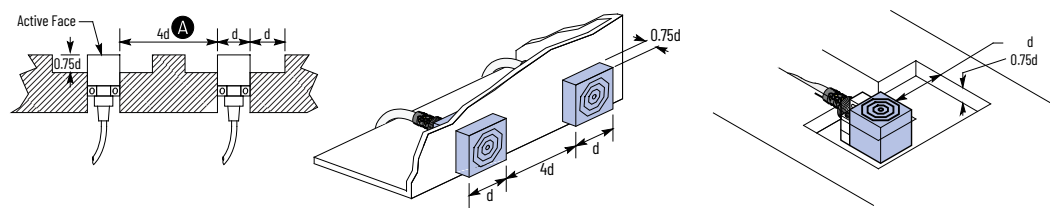Figure 31. 871P VersaCube Sensor (2- and 3-wire)




(A) 3d for weld field immune models.
d = diameter or width of active sensing face
Sn = nominal sensing distance

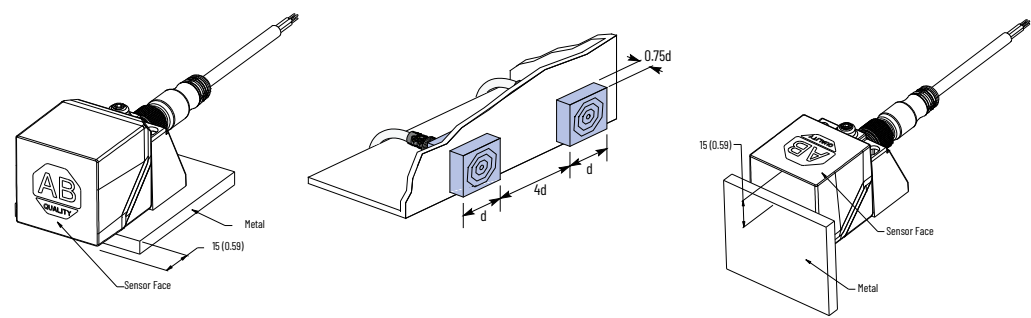Figure 32. 871P VersaCube Sensor (4-wire [mm (in.)])



Surrounding Metal Thickness [mm (in.)]	Number of Sides	Orientation	Metal-free Clear Zone (Each Side) [mm (in.)]
3 (0.12)	1	Front sensing face with bracket on back	15 (0.59) protrusion
		Side sensing face with bracket on back	15 (0.59) protrusion ¹
	2, 3, or 4	Front sensing face with bracket on back	30 (1.18) protrusion

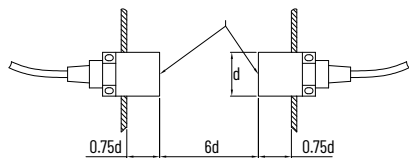Figure 33. Spacing Between Opposing Sensors



1. Sensing distance deviation can be up to -15%.

Enclosure Ratings

NEMA Enclosures

Table 2. Enclosures for Nonhazardous Locations

For a Degree of Protection Against:	Designed to Meet Tests No. ²	Type							
		For Indoor Use			Outdoor Use		Indoor or Outdoor		
		1	12	13	3R	3	4	4X	6P
Incidental contact with enclosed equipment	6.2	✓	✓	✓	✓	✓	✓	✓	✓
Falling dirt	6.2	✓	✓	✓	✓	✓	✓	✓	✓
Rust	6.8	✓	✓	✓	✓	✓	✓	✓	✓
Circulating dust, lint, fibers and flyings ³	6.5.1.2 (2)	–	✓	✓	–	✓	✓	✓	✓
Windblown dust	6.5.1.1 (2)	–	–	–	–	✓	✓	✓	✓
Falling liquids and light splashing	6.3.2.2	–	✓	✓	–	✓	✓	✓	✓
Rain (Test evaluated per 6.4.2.1)	6.4.2.1	–	–	–	✓	✓	✓	✓	✓
Rain (Test evaluated per 6.4.2.2)	6.4.2.2	–	–	–	–	✓	✓	✓	✓
Snow and sleet	6.6.2.2	–	–	–	✓	✓	✓	✓	✓
Hosedown and splashing water	6.7	–	–	–	–	–	✓	✓	✓
Occasional prolonged submersion	6.11 (2)	–	–	–	–	–	–	–	✓
Oil and coolant	6.3.2.2		✓	✓	–	–	–	–	–
Oil or coolant spraying and splashing	6.12	–	–	✓	–	–	–	–	–
Corrosive agents	6.9	–	–	–	✓	✓	–	✓	✓

IMPORTANT: For indoor locations only unless cataloged with additional NEMA Type enclosure numbers suitable for outdoor use as shown in the previous table. Some control devices (if so listed in the catalog) are suitable for Division 2 hazardous location use in enclosures for non-hazardous locations. For explanation of CLASSES, DIVISIONS and GROUPS, refer to the National Electrical Code.

Classifications of hazardous locations are subject to the approval of the authority having jurisdiction. See the National Electrical Code.

2. See below for abridged description of NEMA enclosure test requirements. See NEMA Standards Publication No. 250 for complete test specifications.

3. Nonhazardous materials, not Class III ignitable or combustible.

Table 3. Enclosures for Hazardous Locations (Division 1 or 2)

For A Degree of Protection Against Atmospheres Typically Containing: 4	Designed to Meet Tests: 5	Class (National Electrical Code)	Type						
			7, Class I Group:				9, Class II Group:		
			A	B	C	D	E	F	G
Acetylene	Explosion Test Hydrostatic Test Temperature Test	I	✓	—	—	—	—	—	—
Hydrogen, manufactured gas		I	✓	✓	—	—	—	—	—
Diethyl Ether, Ethylene, Hydrogen Sulfide		I	—	—	✓	—	—	—	—
Acetone, Butane, Gasoline, Propane, Toluene		I	—	—	✓	✓	—	—	—
Metal dusts and other combustible dusts with resistivity < 10 ⁵ ohm-cm	Dust Penetration Test Temperature Test with Dust Blanket	II	—	—	—	—	✓	—	—
Carbon black, charcoal, coal, or coke dusts (10 ² ...10 ⁸ ohm-cm)		II	—	—	—	—	—	✓	—
Combustible dusts with resistivity ≥ 10 ⁵ ohm-cm		II	—	—	—	—	—	—	✓
Fibers, flyings	6	III	—	—	—	—	—	—	✓

5. See abridged description of test requirements below. For complete requirements, see UL Standard 698, compliance with which is required by NEMA enclosure standards.

4. For listing of additional materials and information noting the properties of liquids, gases, and solids, see NFPA 497M-1991, Classification of Gases, Vapors, and Dusts for Electrical Equipment in Hazardous (Classified) Locations.

6. UL 698 does not include test requirements for Class III. Products that meet Class II, Group G requirements are acceptable for Class III.

IEC Enclosure Classification

The degree of protection is indicated by two letters (IP) and two numerals. International Standard IEC 529 contains descriptions and associated test requirements that define the degree of protection each numeral specifies. The following table indicates the general degree of protection—see the Abridged Descriptions of IEC Enclosure Test Requirements below. For complete test requirements, refer to IEC 529.

First Numeral 7		Second Numeral 7	
Protection of persons against access to hazardous parts and protection against penetration of solid foreign objects.		Protection against ingress of water under test conditions specified in IEC 529.	
0	Nonprotected	0	Nonprotected
1	Back of hand; objects greater than 50 mm (1.97 in.) diameter	1	Vertically falling drops of water
2	Finger; objects greater than 12.5 mm (0.49 in.) diameter	2	Vertically falling drops of water with enclosure tilted 15°
3	Tools or objects greater than 2.5 mm (0.1 in.) diameter	3	Spraying water
4	Tools or objects greater than 1.0 mm (0.04 in.) diameter	4	Splashing water
5	Dust-protected (dust may enter during specified test, but must not interfere with operation of the equipment or impair safety)	5	Water jets
6	Dusttight (no dust observable inside enclosure at end of test)	6	Powerful water jets
		7	Temporary submersion
		8	Continuous submersion
		9	Close range high-pressure washdown



IP41 describes an enclosure that is designed to protect against the entry of tools or objects greater than 1 mm (0.04 in.) in diameter and to protect against vertically dripping water under specified test conditions.

IMPORTANT: All first numerals and second numerals up to and including characteristic numeral 6, imply compliance also with the requirements for all lower characteristic numerals in their respective series (first or second). Second numerals 7 and 8 do not imply suitability for exposure to water jets (second characteristic numeral 5 or 6) unless dual coded; for example, IP_5/IP_7.

7. The IEC standard permits the use of certain supplementary letters with the characteristic numerals, for example, IP69K (K signifies high temperature water).

Applications

Table 4. Typical Applications



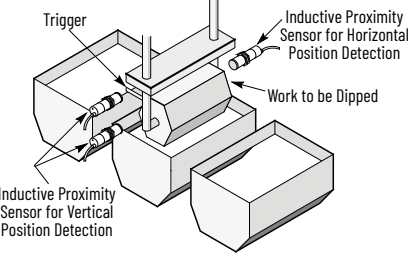


Application	Example
Machine Tools	
Plating Line	
Plating Line	
Grinding Machines	
Wood Industry	

Table 4. Typical Applications (continued)



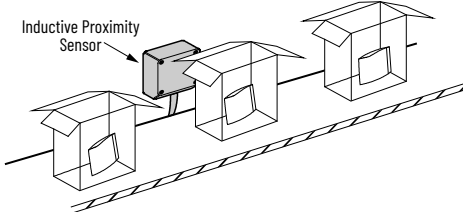
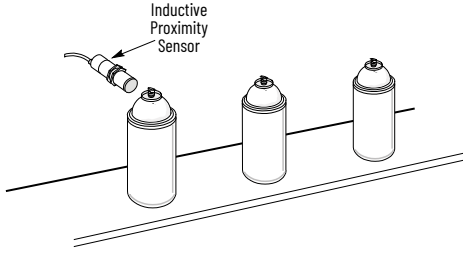
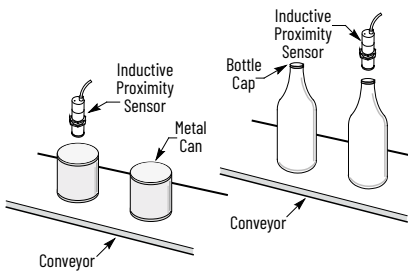
Application	Example
Conveyor Belts	 <p>The diagram shows a conveyor belt with several metal parts (represented by small rectangles) moving from right to left, as indicated by an arrow. An inductive proximity sensor is positioned below the belt, detecting the metal parts. Labels include 'Metal Parts' and 'Inductive Proximity Sensor'.</p>
Petroleum Industry (Valve Position)	 <p>The diagram shows a handwheel on a valve stem. Two sensors, labeled '87ITM', are positioned to detect the handwheel's position. Label 'A' points to the top sensor, and label 'B' points to the bottom sensor. Text below the diagram states: 'A = Open valve indicator' and 'B = Closed valve indicator'.</p>
Foil Seasoning Bag	 <p>The diagram shows a sequence of three cardboard boxes on a conveyor belt. An inductive proximity sensor is positioned above the first box, detecting a foil seasoning bag inside. Labels include 'Inductive Proximity Sensor'.</p> <p>The inductive proximity sensor is detecting a foil seasoning bag inside a cardboard container.</p>
Can Tops	 <p>The diagram shows three cans on a conveyor belt. An inductive proximity sensor is positioned above the first can, detecting its top. Label includes 'Inductive Proximity Sensor'.</p> <p>The ferrous-selective inductive proximity sensor is helping sort ferrous and nonferrous can tops.</p>
Food Industry	 <p>The diagram shows a conveyor belt with metal cans and bottle caps. Two inductive proximity sensors are positioned above the belt. One sensor is detecting a metal can, and the other is detecting a bottle cap. Labels include 'Inductive Proximity Sensor', 'Metal Can', 'Bottle Cap', and 'Conveyor'.</p>

Table 4. Typical Applications (continued)

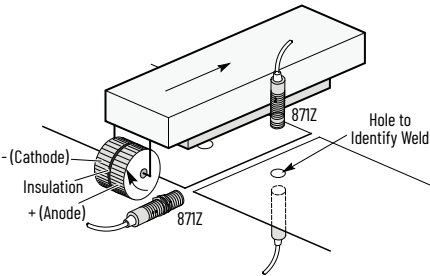
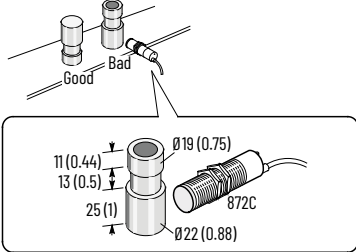


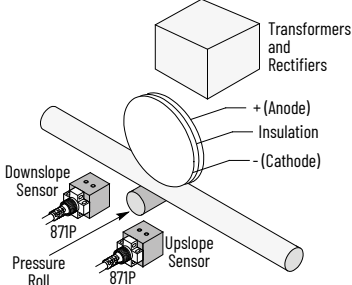
Application	Example
Stainless-steel Sheet Welder	
On Line Parts Sorting	
Railroad Yard Position Sensing	
Coolant-resistant Sensing	
Up- and Downslope Control of Continuous Tube Welder	

Table 4. Typical Applications (continued)





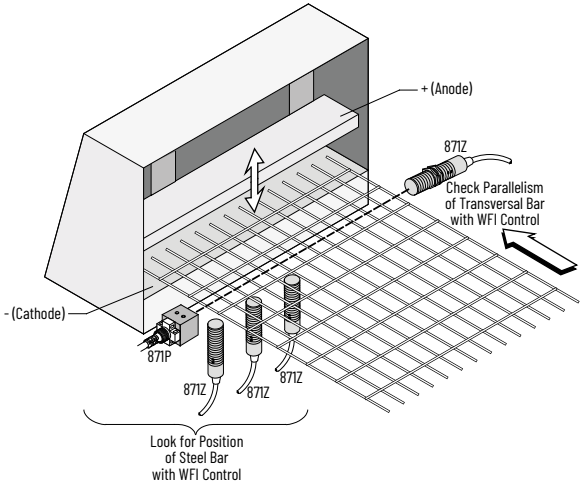
Application	Example
Nut Placement on Transformer	 <p>Transformer</p>
Closed Barrier Indicator	 <p>871TM Indicates When Barrier is Closed</p>
Detect Presence of Bushing in Piston	 <p>A = Sensing path</p>
Control the Presence of Mild Steel Bars in Grate Welding	 <p>+ (Anode)</p> <p>871Z Check Parallelism of Transversal Bar with WFI Control</p> <p>- (Cathode)</p> <p>871P</p> <p>871Z</p> <p>871Z</p> <p>Look for Position of Steel Bar with WFI Control</p>

Table 4. Typical Applications (continued)

Application	Example
Elevator Positioning	<div><p>Rockwell Automation produces rail-guide inductive proximity sensors for the positioning of elevator cars. These sensors offer increased accuracy and longer life when compared to typical mechanical switches. They are a cost-effective solution for lowering your repair costs and downtime. Contact your local Rockwell Automation sales office or Allen-Bradley distributor for a proximity sensor that meets your requirements.</p></div>

Tubular Sensors

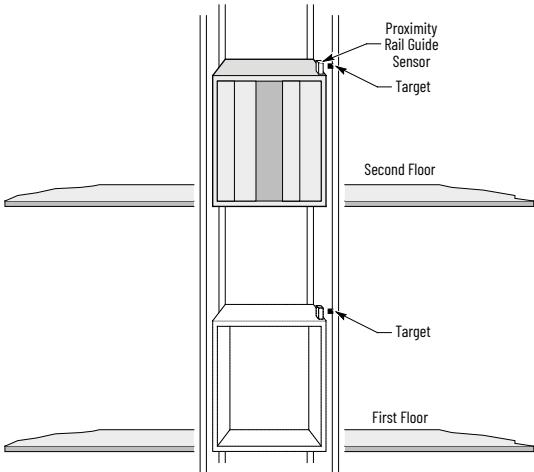871C 2-wire AC Full Featured Tubular Sensors



871C Cable Style – 18 mm and 30 mm Diameter

871C Mini Quick Disconnect
Style – 12 mm, 18 mm, and 30 mm Diameter871C AC Micro Quick Disconnect
Style – 12 mm, 18 mm, and 30 mm Diameter

Specifications

Attribute	12 mm Diameter	18 mm and 30 mm Diameter
Load current	5...200 mA	5...250 mA
Inrush current (one cycle)	≤ 2 A	≤ 4 A
Leakage current	≤ 1.9 mA at 120V AC	
Operating voltage	20...250V AC	
Voltage drop	≤ 10V at 5...200 mA	≤ 10V at 5...250 mA
Repeatability	≤ 10% at constant temperature	
Hysteresis	10% typical	
Protection type	False pulse, transient noise, short circuit, overload (trigger at 250 mA typical)	False pulse, transient noise, short circuit, overload (trigger at 320 mA typical)
Certifications	UL Listed, CSA Certified, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 1, 2, 3, 3R, 4, 4X, 6, 6P, 12, 13; IP67 (IEC529)	
Housing material	Plastic face, threaded nickel-plated brass barrel	
Connection type	<ul style="list-style-type: none"> Cable: 2 m (6.5 ft) length, 2-conductor PVC Quick disconnect: 3-pin AC micro, 3-pin mini 	
Status indicator	<ul style="list-style-type: none"> Red: Output energized/short circuit (flashing) Green: Power 	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock	30 g (1.06 oz), 11 ms	
Vibration	55 Hz, 1 mm (0.04 in.) amplitude, 3 planes	

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.9
Brass	0.5
Aluminum	0.45
Copper	0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.		
					Cable Style	Mini QD Style	AC Micro QD Style
12 (0.47)	2 (0.08)	Yes	N.O.	30	871C-A2N12-A2	871C-A2N12-N3	871C-A2N12-R3
			N.C.	20	871C-A2C12-A2	871C-A2C12-N3	871C-A2C12-R3
18 (0.71)	5 (0.2)	Yes	N.O.	30	871C-A5N18-A2	871C-A5N18-N3	871C-A5N18-R3
			N.C.	20	871C-A5C18-A2	871C-A5C18-N3	871C-A5C18-R3
30 (1.18)	10 (0.39)	Yes	N.O.	30	871C-A10N30-A2	871C-A10N30-N3	871C-A10N30-R3
			N.C.	20	871C-A10C30-A2	871C-A10C30-N3	871C-A10C30-R3
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F	889R-F3ECA-2


Approximate Dimensions

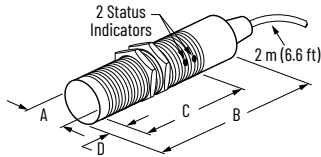Figure 34. Cable Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	78.99 (3.11)	47.24 (1.86)	0.8 (0.03)
M18 x 1	Yes	18 (0.71)	74.68 (2.94)	61.6 (2.43)	
M30 x 1.5	Yes	30 (1.18)	77.52 (3.05)	64.31 (2.53)	

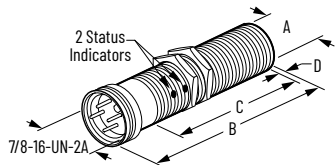Figure 35. Mini QD Style



Thread Size	Dimensions [mm (in.)]		
	A	B	C
M12 x 1	12 (0.47)	93.45 (3.68)	46.08 (1.81)
M18 x 1	18 (0.71)	75.82 (2.99)	53.9 (2.12)
M30 x 1.5	30 (1.18)	86.66 (3.41)	64.31 (2.53)

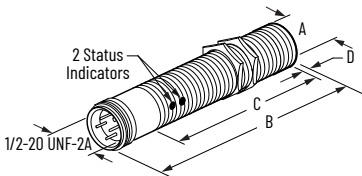Figure 36. AC Micro QD Style



Thread Size	Dimensions [mm (in.)]		
	A	B	C
M12 x 1	12 (0.47)	90.42 (3.56)	46.99 (1.85)
M18 x 1	18 (0.71)	83.54 (3.29)	61.6 (2.43)
M30 x 1.5	30 (1.18)	86 (3.39)	64.31 (2.53)

Wiring Diagrams


Table 5. Cable Style

Normally Open	Normally Closed

IMPORTANT: Load can be switched to brown wire.

Table 6. Mini QD Style

Normally Open or Normally Closed




IMPORTANT:

- No ground wire on 12 mm. Attach housing to ground.
- Load can be switched to pin 3.

Table 7. AC Micro QD Style

Normally Open or Normally Closed



IMPORTANT:

- No ground wire on 12 mm. Attach housing to ground.
- Load can be switched to pin 2.

871C 2-wire AC Plastic Barrel Tubular Sensors



871C Cable Style – 18 mm and 30 mm Diameter

Specifications

Attribute	18 mm Diameter	30 mm Diameter
Load current	≤ 180 mA	≤ 300 mA
Inrush current (one cycle)	≤ 1 A	≤ 3 A
Leakage current	≤ 1.7 mA	
Operating voltage	24...250V AC	
Voltage drop	≤ 11V	
Hysteresis	≤ 20% typical	
Protection type	Transient noise	
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 1, 2, 3, 4, 4X, 12, 13; IP67 (IEC529)	
Housing material	Plastic face and threaded barrel	
Connection type	Cable: 2 m (6.5 ft) length, 2-conductor PVC	
Status indicator	Red: Output energized	
Operating temperature	-25...+55 °C (-13...+131 °F)	
Shock	30 g (1.06 oz), 11 ms	
Vibration	55 Hz, 1 mm (0.039 in.) amplitude, 3 planes	

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.3...0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
					Cable Style
18 (0.71)	5 (0.2)	Yes	N.O.	8	871C-C5S18
			N.C.		871C-D5S18
	8 (0.31)	No	N.O.		871C-C8R18
			N.C.		871C-D8R18
30 (1.18)	10 (0.39)	Yes	N.O.		871C-C10S30
	15 (0.59)	No	N.O.		871C-C15R30
			N.C.		871C-D15R30

Approximate Dimensions

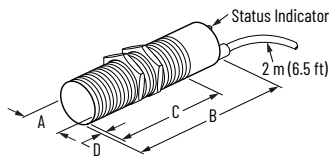Figure 37. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M18 x 1	Yes	18 (0.71)	81 (3.19)	61 (2.4)	2 (0.08)
	No 8				
M30 x 1.5	Yes	30 (1.18)			
	No 8				

Wiring Diagrams

Table 8. Cable Style

Normally Open	Normally Closed

IMPORTANT: Load can be switched to black wire.

8. Unshielded proximity sensors require a metal-free zone around the sensing face. Any metal immediately opposite the sensing face must be no closer than three times the rated nominal sensing distance of the sensor.

871C 3-wire DC Analog Output Tubular Sensors



871C Cable Style — 12 mm, 18 mm, and 30 mm Diameter

Specifications

Attribute	12 mm Diameter	18 mm Diameter	30 mm Diameter
Analog output	0...10V sourcing		
Load current	5 mA		
Operating voltage	18...30V DC		
Repeatability	≤1%		
Ripple	10%		
Slew speed	1.0 V/ms	0.7 V/ms	0.1 V/ms
Δ Output/Δ distance	0.25 mm/V	0.375 mm/V	0.875 mm/V
Linearity tolerance	6.25%		
Temperature drift	±0.3V		
Protection type	Transient noise, reverse polarity, short circuit, and overload		
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations		
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13; IP67 (IEC529)		
Housing material	Nickel-plated brass barrel, plastic face (PBT)		
Connection type	Cable: 2 m (6.5 ft) length, 3-conductor PVC		
Status indicator	None		
Operating temperature	-25...+70 °C (-13...+158 °F)		
Shock	30 g (1.06 oz), 11 ms		
Vibration	55 Hz, 1 mm amplitude, 3 planes		

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Barrel Diameter [mm (in.)]	Linear Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.
						Cable Style
12 (0.47)	0.5...2.5 (0.02...0.1)	Yes	Analog voltage	PNP	100	871C-D3AP12-E2
18 (0.71)	1...4 (0.04...0.16)	Yes			100	871C-D4AP18-E2
30 (1.18)	1...9 (0.04...0.35)	Yes			400	871C-D9AP30-E2
	7...14 (0.27...0.55)	No			30	871C-D14AP30-E2

Approximate Dimensions

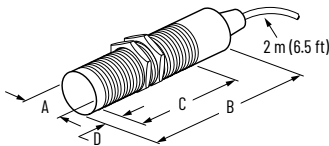


Figure 38. Cable Style



Thread Size	Dimensions [mm (in.)]			
	A	B	C	D
12 mm	12 (0.47)	81 (3.15)	58 (2.28)	12 (0.47)
18 mm	18 (0.71)			
30 mm	30 (1.18)		70 (2.75)	




Wiring Diagrams

Table 9. Cable Style

12 mm Diameter	18 mm Diameter	30 mm Diameter
		

Nominal Output

Table 10. Cable Style

12 mm Diameter	18 mm Diameter	30 mm Diameter
		

IMPORTANT: Load can be switched to black wire.

871C 3-wire DC Mini Tubular Sensors



			
871C NAMUR Cable/Micro QD	871C NAMUR Micro Quick Disconnect	871C NAMUR Micro Quick Disconnect	871C NAMUR Micro Quick Disconnect
Style — 8 mm, 12 mm, 18 mm, and 30 mm	Style — 8 mm, 12 mm, 18 mm, and 30 mm	Style — 8 mm, 12 mm, 18 mm, and 30 mm	Style — 8 mm, 12 mm, 18 mm, and 30 mm

Specifications

Attribute	3 mm Smooth Barrel and 4 mm Threaded Barrel	4 mm Smooth Barrel and 5 mm Threaded Barrel
Environmental		
Operating environment	NEMA 1, 2, 3, 4, 12, 13 IP67 (IEC 529)	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Vibration	55 Hz, 1 mm amplitude, 3 planes	
Shock	30 g (1.06 oz), 11 ms	
Electrical		
Load current	≤ 100 mA	< 200 mA
Leakage current	≤ 0.1 mA	
Operating voltage	10...30V DC	
Voltage drop	≤ 2V	
Repeatability	≤ 5%	
Hysteresis	10% typical	
Protection type	False pulse, transient noise, reverse polarity, and short circuit	
IO-Link (Enabled on Normally Open, PNP Models Only)		
Protocol	IO-Link V1.0	
Interface type	IO-Link	
Mode	COM 2 (38.4 kBd)	

Inductive Proximity Sensor Specifications

Attribute	3 mm Smooth Barrel and 4 mm Threaded Barrel	4 mm Smooth Barrel and 5 mm Threaded Barrel
Cycle time 1	10.4 ms, minimum	
SIO (standard I/O)	Supported (pin 4 for either IO-Link or standard I/O)	
Mechanical		
Housing material	Small threaded or smooth stainless steel barrel, polyester face	
Status indicator	Yellow: Output energized	
Status indicator (IO-Link mode)	Steady yellow: Sensor in IO-Link mode	
Connection type	Pico™ QD (M8), 2 m (6.6 ft) cable, Pico with lead	

Correction Factors


Sensor Type/ Target Material	3 mm Diameter Smooth		4 mm Diameter Smooth or Threaded		5 mm Diameter Smooth or Threaded	
	0.6 mm Sr	1.0 mm Sr	0.8 mm Sr	1.5 mm Sr	1 mm Sr	1.5 mm Sr
Steel	1	1	1	1	1	1
Copper	0.5	0.45	0.45	0.4	0.45	0.4
Aluminum	0.55	0.5	0.5	0.4	0.5	0.4
Brass	0.65	0.6	0.55	0.5	0.55	0.5
Stainless steel 304	0.8	0.8	0.8	0.75	0.8	0.75

Product Selection

Barrel Diameter [mm (in.)]	Barrel Type [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.		
							Cable Style	Pico QD Style	Pico with Lead Style
3 (0.12)	Smooth	0.6 (0.02)	Yes	N.O.	NPN	5000	871C-DM1NN3-E2	—	871C-DM1NN3-AP3
					PNP		871C-DM1NP3-E2	—	871C-DM1NP3-AP3
		1 (0.04)			NPN	3000	871C-MM1NN3-E2	—	871C-MM1NN3-AP3
					PNP		871C-MM1NP3-E2	—	871C-MM1NP3-AP3
4 (0.16)	Threaded	0.8 (0.03)			NPN	5000	871C-D1NN4-E2	—	871C-D1NN4-AP3
					PNP		871C-D1NP4-E2	—	871C-D1NP4-AP3
		1 (0.04)			NPN	3000	871C-M1NN4-E2	—	871C-M1NN4-AP3
					PNP		871C-M1NP4-E2	—	871C-M1NP4-AP3
	Smooth	0.8 (0.03)			NPN	5000	871C-DM1NN4-E2	871C-DM1NN4-P3	—
					PNP		871C-DM1NP4-E2	871C-DM1NP4-P3	871C-DM1NP4-AP3
		1.5 (0.06)			NPN	3000	871C-MM2NN4-E2	871C-MM2NN4-P3	—
					PNP		871C-MM2NP4-E2	871C-MM2NP4-P3	—
5 (0.2)	Threaded	1 (0.04)			NPN	5000	871C-D1NN5-E2	871C-D1NN5-P3	—
					PNP		871C-D1NP5-E2	871C-D1NP5-P3	—
		1.5 (0.06)			NPN	3000	871C-M2NN5-E2	871C-M2NN5-P3	—
					PNP		871C-M2NP5-E2	871C-M2NP5-P3	—
Recommended standard QD cordset: -2 = 2 m (6.5 ft)								889P-F3AB-2	


Approximate Dimensions

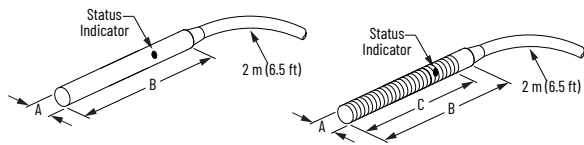Figure 39. Cable Style




Smooth Diameter	Thread Size	Shielded	Dimensions [mm (in.)]		
			A	B	C
3	—	Yes	3 (0.12)	22 (0.87)	—
4	—		4 (0.16)	25 (0.98)	—
4	M4 x 0.5	Yes	4 (0.16)	22 (0.87)	19 (0.75)
5	M5 x 0.5		5 (0.2)	25 (0.98)	20 (0.79)

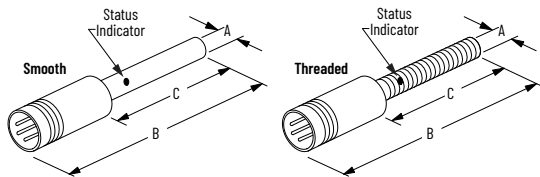Figure 40. Pico QD Style



Smooth Diameter	Thread Size	Shielded	Dimensions [mm (in.)]		
			A	B	C
4	—	Yes	4 (0.16)	38 (1.5)	19 (0.74)
5	M5 x 0.5		5 (0.2)	38 (1.5)	23 (0.9)

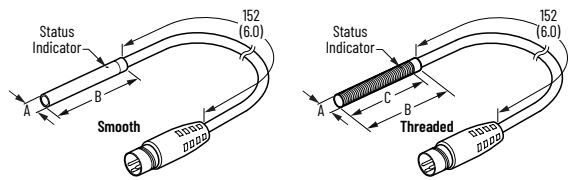Figure 41. Pico with Lead Style [mm (in.)]



Smooth Diameter	Shielded	Dimensions [mm (in.)]		
		A	B	C
3	Yes	3 (0.1)	22 (0.87)	—
4		4 (0.16)	22 (0.87)	19 (0.74)

Wiring Diagrams

Figure 42. Cable Style – Normally Open


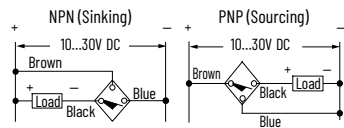


Figure 43. Pico QD and Pico with Lead Style – Normally Open

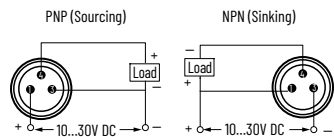

871C 3-wire DC Extended Temperature Tubular Sensors



871C Cable Style
12 mm, 18 mm, and 30 mm Diameter



871C DC M12 Micro Quick Disconnect Style
12 mm, 18 mm, and 30 mm Diameter

Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameter
Load current	1...200 mA
Leakage current	≤ 10 µA
Operating voltage	10...30V DC
Voltage drop	≤ 2.4V
Repeatability	≤ 10%
Hysteresis	≤ 15% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13; IP67 (IEC529)
Housing material	Threaded nickel-plated brass barrel, plastic face
Connection type	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) length, 3-conductor PURQuick disconnect: 4-pin M12 micro style
Status indicator	Orange: Output energized
Operating temperature	-40...+100 °C (-40...+212 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.9
Brass	0.5
Aluminum	0.45
Copper	0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						Cable Style	Micro QD Style
12 (0.47)	2 (0.08)	Yes	N.O.	PNP	2000	871C-DT2NP12-U2	871C-DT2NP12-D4
	4 (0.16)	No			1000	871C-DT4NP12-U2	871C-DT4NP12-D4
18 (0.71)	5 (0.2)	Yes	N.O.	PNP	1000	871C-DT5NP18-U2	871C-DT5NP18-D4
	8 (0.31)	No			500	871C-DT8NP18-U2	871C-DT8NP18-D4
30 (1.18)	10 (0.39)	Yes	N.O.	PNP	500	871C-DT10NP30-U2	871C-DT10NP30-D4
	15 (0.59)	No			300	871C-DT15NP30-U2	871C-DT15NP30-D4
Recommended cordset: 2 m (6.5 ft)							889D-F4AC-2


Approximate Dimensions

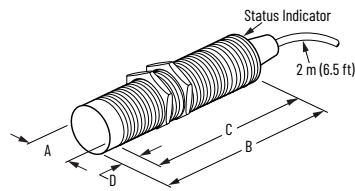Figure 44. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	40 (1.57)	40 (1.57)	—
	No			34 (1.34)	6 (0.24)
M18 x 1	Yes	18 (0.71)		40 (1.57)	—
	No			32 (1.26)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)		40 (1.57)	—
	No			28 (1.12)	12 (0.47)

Figure 45. M12 Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	60 (2.36)	40 (1.57)	—
	No			34 (1.34)	6 (0.24)
M18 x 1	Yes	18 (0.71)		40 (1.57)	—
	No			32 (1.26)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)		40 (1.57)	—
	No			28 (1.12)	12 (0.47)

Wiring Diagrams

Figure 46. Cable Style – Normally Open





Figure 47. M12 Micro QD Style – Normally Open, PNP (Sourcing)



871T 2-wire AC Stainless Steel Barrel Tubular Sensors



871T Cable Style
12 mm and 18 mm Diameter



871T Mini Quick Disconnect Style
18 mm Diameter

Specifications

Attribute	12 mm Diameter	18 mm Diameter
Load current	≤ 300 mA	≤ 500 mA
Inrush current (one cycle)	≤ 3 A	≤ 5 A
Leakage current	≤ 1.5 mA	
Operating voltage	20...132V AC	
Voltage drop	6.5V AC at 500 mA, 10V AC at 20 mA (RMS)	
Repeatability	≤ 10%	
Hysteresis	≤ 10% typical	
Protection type	False pulse, transient noise	
Certifications	UL Listed, CSA Certified, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 1, 2, 3, 4, 12 and 13; IP67 (IEC529)	
Housing material	Stainless steel 303 barrel, plastic face	
Connection type	<ul style="list-style-type: none">Cable: 3 m (10 ft) length, 12 mm (2 conductor PVC, 18 mm; 3conductor PVCQuick disconnect: 3-pin mini style	
Status indicator	Red: Output Energized	
Operating temperature	-40...+70 °C (-40...+158 °F)	
Shock	30 g (1.06 oz), 11 ms	
Vibration	55 Hz, 1 mm amplitude, 3 planes	

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.9
Brass	0.3...0.5
Aluminum	0.3...0.4
Copper	0.3...0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.	
					Cable Style	Mini QD Style
12 (0.47)	2 (0.08)	Yes	N.O.	50	871T-G2A12	—
	4 (0.16)	No			871T-G4B12	—
	2 (0.08)	Yes	N.C.		871T-H2A12	—
	4 (0.16)	No			871T-H4B12	—
18 (0.71)	5 (0.2)	Yes	N.O.		871T-G5A18	871T-G5J18
	8 (0.31)	No			871T-G8B18	871T-G8K18
	5 (0.2)	Yes	N.C.		871T-H5A18	871T-H5J18
	8 (0.31)	No			871T-H8B18	871T-H8K18
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F


Approximate Dimensions

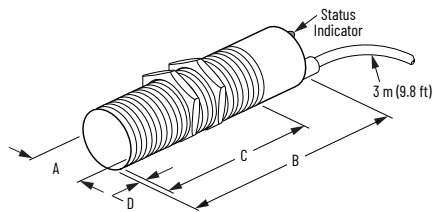Figure 48. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B (Max)	C (Min)	D (Max)
M12 x 1	Yes	12 (0.47)	80 (23.15)	53.8 (2.12)	0.8 (0.03)
	No			46.5 (1.83)	8.1 (0.32)
M18 x 1	Yes	18 (0.71)	81.5 (3.21)	55.6 (2.19)	0.8 (0.03)
	No		81.3 (3.2)	43.7 (1.72)	12.3 (0.48)

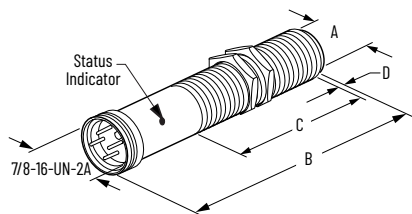

Figure 49. Mini QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B (Max)	C (Min)	D (Max)
M18 x 1	Yes	18 (0.71)	96.9 (3.81)	51.9 (2.04)	0.8 (0.03)
	No			40.4 (1.59)	12.3 (0.48)


Wiring Diagrams

Table 11. Cable Style

Normally Open	Normally Closed
	

IMPORTANT: No green wire on 12 mm models. Attach housing to ground.

Table 12. Mini QD Style

Normally Open or Normally Closed


IMPORTANT: Load can be switched to pin 3.

871T 4-wire AC Ferrous Selective Tubular Sensors



871T Cable Style
18 mm Diameter



871T Mini Quick Disconnect Style
18 mm Diameter

Specifications

Attribute	18 mm Diameter
Load current	≤ 500 mA
Inrush current (one cycle)	≤ 5 A
Supply Current, min	5 mA
Leakage current	≤ 1.7 mA
Operating voltage	20...132V AC
Voltage drop	<ul style="list-style-type: none">N.O. output: 6.5V AC at 500 mA, 10V AC at 20 mA (RMS)N.C. output: 1.7V AC at 500 mA (RMS)
Isolation voltage	800V AC (output to output); 1500V AC (output to housing)
Repeatability	≤ 10%
Hysteresis	≤ 10% typical
Protection type	False pulse, transient noise
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 3, 4, 12 and 13; IP67 (IEC529)
Housing material	Stainless steel face and threaded barrel
Connections	<ul style="list-style-type: none">Cable: 3.6 m (12 ft) length, 5-conductor PVCQuick disconnect: 5-pin mini style
Status indicator	<ul style="list-style-type: none">Red: Output energizedGreen: Power
Operating temperature	0...70 °C (32...158 °F)

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel ⁹	0.8...1.1
Brass	0.0
Aluminum	0.0
Copper	0.0

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.	
					Cable Style	Mini QD 5-pin Style
18 (0.71)	5 (0.2)	Yes	N.O. and N.C.	10	871T-A5A18FE-12	871T-A5J18FE
Recommended standard QD cordset: -6F = 1.8 m (6 ft)						889N-F5AFC-6F

Approximate Dimensions

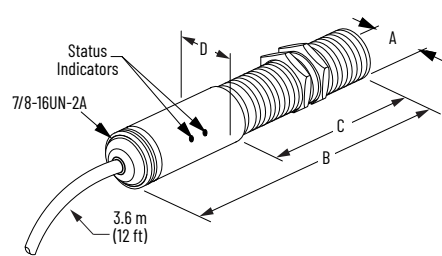
Figure 50. Cable Style



Thread Size	Dimensions [mm (in.)]			
	A	B (Max)	C (Min)	D (Max)
M18 x 1	18 (0.71)	101.6 (4)	50.8 (2)	20.3 (0.8)

9. Stainless steel 10% contains carbon.

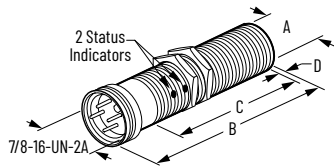
Figure 51. Mini QD Style



Thread Size	Dimensions [mm (in.)]			
	A	B (Max)	C (Min)	D (Max)
M18 x 1	18 (0.71)	101.6 (4)	50.8 (2)	20.3 (0.8)

Wiring Diagrams

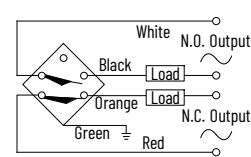
Figure 52. Cable Syle – Complementary N.O. or N.C.



IMPORTANT:

- N.O. output must be wired for operation. N.C. output is optional.
- N.O. load can be switched to white wire.
- N.C. load can be switched to red wire.

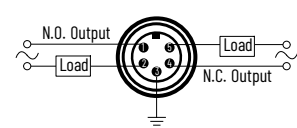Figure 53. Mini QD Style – N.O. or N.C.



IMPORTANT:

- N.O. output must be wired for operation. N.C. output is optional.
- N.O. load can be switched to pin 1.
- N.C. load can be switched to pin 4.

871TM 3-wire DC Weld Field Immune Tubular Sensors

 <p>871TM DC Pico Quick Disconnection Style</p> <p>8 mm</p>	 <p>871TM DC Micro Quick Disconnect Style</p> <p>12 mm</p>	 <p>871TM DC Micro Quick Disconnect Style</p> <p>18 mm</p>
--	---	---

Specifications

Attribute	8 mm, 12 mm, and 18 mm
Load current	≤ 200 mA
Leakage current	≤ 0.1 mA
Operating voltage	10...30V DC
Voltage drop	≤ 2V DC at 200 mA
Repeatability	≤ 5% at constant temperature, maximum sensing range
Hysteresis	15% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit (trigger at 340 mA typical), overload
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	IP68/IP69K
Housing material	Stainless steel face and threaded barrel, resistant to weld splatter
Connection type	Quick disconnect: 4-pin micro style, 3-pin Pico style
Status indicators	Yellow: Output energized/360° visibility flashing status indicator indicates target that is located between 80...100% of rated sensing distance
Operating temperature	-25...+85 °C (-13...+185 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes
Weld field Immunity	≤ 40 mT (400 Gauss)

Correction Factors


Target Material	Barrel Size and Sensing Range		
	M8	M12	M18
	3 mm	6 mm	10 mm
Steel	1.00		
Copper	1.00	0.85	1.15
Aluminum	1.00	1.00	1.40
Brass	1.30	1.30	1.50
Stainless steel (1 mm/2 mm)	0.4/0.70	0.5/0.90	0.1/0.6

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						Pico QD Style	Micro QD Style
8 (0.31)	3	Yes	N.O.	PNP	≤ 15	871TM-MW3NP8-P3	—
12 (0.47)	6	Yes	N.O.	PNP		—	871TM-MW6NP12-D4
18 (0.71)	10	Yes	N.O.	PNP		—	871TM-MW10NP18-D4


Approximate Dimensions

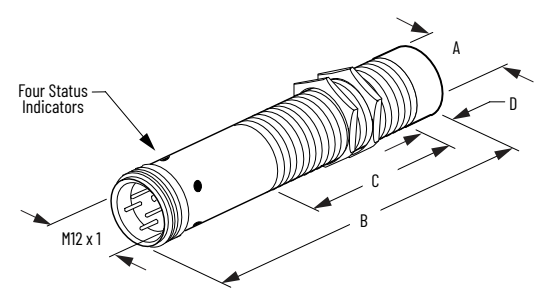Figure 54. Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	60 (2.36)	41 (1.61)	—
M18 x 1	Yes	18 (0.71)	63.5 (2.5)	42.5 (1.67)	—

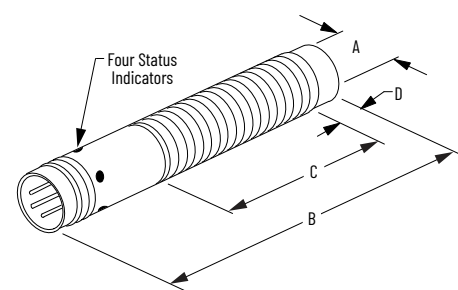Figure 55. Pico QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M8 x 1	Yes	8 (0.31)	60 (2.35)	45.5 (1.79)	—

Wiring Diagrams

Figure 56. Micro QD Style – N.O.





Figure 57. Pico QD Style – N.O.



871TM 3-wire DC Standard Range Tubular Sensors



 <p>871TM 12 mm Diameter Cable and DC Micro Quick Disconnect Variants</p>	 <p>871TM 18 mm Diameter Cable and DC Micro Quick Disconnect Variants</p>	 <p>871TM 30 mm Diameter Cable and DC Micro Quick Disconnect Variants</p>
--	--	--

Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameter
Load current	≤ 200 mA
Capacitive Load	≤ 1 mF
Leakage current	≤ 0.1 mA
Operating voltage	10...30V DC
Voltage drop	≤ 2V DC at 200 mA
Repeatability	≤ 5% at constant temperature
Hysteresis	10% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit (trigger at 340 mA typical), overload
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	12 mm, 18 mm, 30 mm diameter models: IP68/IP69K
Housing material	Stainless steel face and threaded barrel
Connection type	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) lengthQuick disconnect: 4-pin micro style
Status indicators	Yellow: Output energized/360° status indicator visibility, flashing status indicator indicates target that is located between 80...100% of rated sensing distance
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Inductive Proximity Sensor Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameter
IO-Link (Enabled on Normally Open, PNP Models Only)	
Protocol	IO-Link V1.1
Interface Type	IO-Link
Mode	COM2 (38.4 kBd)
Cycle Time, min 10	8 ms
SIO (Standard I/O)	Supported (pin 4 for either IO-Link or standard I/O)

Correction Factors

Instructions for unshielded sensor:

1. To determine the appropriate correction factor, only use [Table 13: Sensor Type and Target Material Correction Factor on page 58](#).
2. To determine derated sensing distance (if applicable), multiply the sensor type with the target material by the sensing range.

Instructions for shielded sensor:

1. To determine the appropriate correction factor, use [Table 13: Sensor Type and Target Material Correction Factor on page 58](#) and [Table 14: Surrounding Material on page 59](#).
2. In [Table 13: Sensor Type and Target Material Correction Factor on page 58](#), determine the appropriate correction factor, based on the type and the target material.
3. In [Table 14: Surrounding Material on page 59](#), multiply the result from [Table 13: Sensor Type and Target Material Correction Factor on page 58](#) by the material the sensor is mounted in. The result is the final correction factor.

Table 13. Sensor Type and Target Material Correction Factor

Sensor Type/ Target Material (No Surrounding Metal)	M12		M18		M30	
	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded
Steel	1.0	1.0	1.0	1.0	1.0	1.0
Copper	0.9	0.9	0.8	0.9	0.7	0.9
Aluminum	1.1	1.0	1.0	1.1	1.1	1.1
Brass	1.5	1.3	1.3	1.4	1.3	1.4
Stainless steel (1 mm)	0.2	0.2	0.6	0.4	0.8	0.3
Stainless steel (2 mm)	0.6	0.6	0.8	0.8	0.9	0.6

10. These products have been tested to comply with IO-Link test specification IEC 61131-9. Environmental EMC and Physical Layer testing have not been performed with the device running in IO-Link mode.

Table 14. Surrounding Material

Surrounding Material Type	M12	M18	M30
Steel	1.0	1.0	0.9
Aluminum	0.9	0.9	0.9
Brass	0.9	0.9	0.8
Stainless steel	0.9	0.9	0.9


Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						M12 Micro QD Style	PUR Cable Style
12 (0.47)	3 (0.12)	Shielded	N.C.	NPN	100	871TM-M3CN12-D4	—
				PNP		871TM-M3CP12-D4	—
			N.O.	NPN		871TM-M3NN12-D4	871TM-M3NN12-A2
				PNP		871TM-M3NP12-D4	871TM-M3NP12-A2
	4 (0.16)	Unshielded	N.C.	NPN	100	871TM-N4CN12-D4	—
				PNP		871TM-N4CP12-D4	—
			N.O.	NPN		871TM-N4NN12-D4	871TM-N4NN12-A2
				PNP		871TM-N4NP12-D4	871TM-N4NP12-A2
18 (0.71)	5 (0.2)	Shielded	N.C.	NPN	100	871TM-M5CN18-D4	—
				PNP		871TM-M5CP18-D4	—
			N.O.	NPN		871TM-M5NN18-D4	871TM-M5NN18-A2
				PNP		871TM-M5NP18-D4	871TM-M5NP18-A2
	8 (0.31)	Unshielded	N.C.	PNP	100	871TM-N8CP18-D4	—
				NPN		871TM-N8NN18-D4	871TM-N8NN18-A2
			N.O.	PNP		871TM-N8NP18-D4	871TM-N8NP18-A2
				NPN			
30 (1.18)	10 (0.39)	Shielded	N.C.	PNP	50	871TM-M10CP30-D4	—
			N.O.	NPN		871TM-M10NN30-D4	871TM-M10NN30-A2
				PNP		871TM-M10NP30-D4	871TM-M10NP30-A2

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						M12 Micro QD Style	PUR Cable Style
	15 (0.59)	Unshielded	N.C.	PNP	50	871TM-N15CP30-D4	—
			N.O.	NPN		871TM-N15NN30-D4	871TM-N15NN30-A2
				PNP		871TM-N15NP30-D4	871TM-N15NP30-A2


Approximate Dimensions

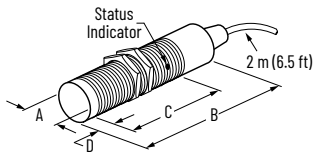Figure 58. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	50 (1.97)	50 (1.97)	—
	No			45 (1.77)	5 (0.2)
M18 x 1	Yes	18 (0.71)	51 (2.01)	51 (2.01)	—
	No			44 (1.73)	7 (0.28)
M30 x 1.5	Yes	30 (1.18)	50 (1.97)	50 (1.97)	—
	No			40 (1.57)	10 (0.39)

Figure 59. M12 Micro QD Style







Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	60 (2.36)	41 (1.61)	—
	No			36 (1.42)	5 (0.2)
M18 x 1	Yes	18 (0.71)	63.5 (2.5)	42 (1.65)	—
	No			35 (1.38)	7 (0.28)
M30 x 1.5	Yes	30 (1.18)	63.5 (2.5)	42 (1.65)	—
	No			32 (1.26)	10 (0.39)

Wiring Diagrams

Table 15. Cable Style

Normally Open	Normally Closed
<p>NPN (Sinking)</p> <p>PNP (Sourcing)</p>	<p>NPN (Sinking)</p> <p>PNP (Sourcing)</p>

Table 16. M12 Micro QD Style

Normally Open	Normally Closed
<div><p>NPN (Sinking)</p><p>PNP (Sourcing)</p></div>	<div><p>NPN (Sinking)</p><p>PNP (Sourcing)</p></div>

871TM 3-wire DC Long-range Sensing Tubular Sensors



			
871TM M8 Pico Quick Disconnection Style	871TM DC M12 Micro Quick Disconnect Style	871TM DC Cable Style	871TM DC M12 Micro Quick Disconnect Style
8 mm Diameter	12 mm Diameter	18 mm Diameter	30 mm Diameter

Specifications

Attribute	8 mm, 12 mm, 18 mm, and 30 mm Diameter
Load current	≤ 200 mA
Capacitive Load	≤ 1 mF
Leakage current	≤ 0.1 mA
Operating voltage	10...30V DC
Voltage drop	≤ 2V DC at 200 mA
Repeatability	≤ 5% at constant temperature
Hysteresis	10% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit (trigger at 340 mA typical), overload
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	<ul style="list-style-type: none">12 mm, 18 mm, 30 mm diameter models: IP68/IP69K8 mm diameter quick disconnect models: IP678 mm diameter cable models: IP68
Housing material	Stainless steel face and threaded barrel
Connection type	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) lengthQuick disconnect: 4-pin micro style, 3-pin Pico style
Status indicators	Yellow: Output energized/360° status indicator visibility, flashing status indicator indicates target that is located between 80...100% of rated sensing distance
Operating temperature	-25...+70 °C (-13...+158 °F)

Attribute	8 mm, 12 mm, 18 mm, and 30 mm Diameter
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes
IO-Link (Enabled on Normally Open, PNP Models Only)	
Protocol	IO-Link V1.1
Interface Type	IO-Link
Mode	COM2 (38.4 kBd)
Cycle Time, min ¹¹	8 ms
SIO (Standard I/O)	Supported (pin 4 for either IO-Link or standard I/O)

Correction Factors

Instructions for unshielded sensor:

1. To determine the appropriate correction factor, only use [Table 17: Sensor Type and Target Material Correction Factor on page 64](#).
2. To determine derated sensing distance (if applicable), multiply the sensor type with the target material by the sensing range.

Instructions for shielded sensor:

1. To determine the appropriate correction factor, use [Table 17: Sensor Type and Target Material Correction Factor on page 64](#) and [Table 18: Surrounding Material on page 65](#).
2. In [Table 17: Sensor Type and Target Material Correction Factor on page 64](#), determine the appropriate correction factor, based on the type and the target material.
3. In [Table 18: Surrounding Material on page 65](#), multiply the result from [Table 17: Sensor Type and Target Material Correction Factor on page 64](#) by the material the sensor is mounted in. The result is the final correction factor.

Table 17. Sensor Type and Target Material Correction Factor

Sensor Type/ Target Material (No Surrounding Metal)	8 mm Diameter		12 mm Diameter		18 mm Diameter		30 mm Diameter	
	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded
Steel	1	1	1	1	1	1	1	1
Copper	0.90	0.85	0.85	0.80	0.80	0.90	0.90	0.90
Aluminum	1	1	1	1	1	1	1	1
Brass	1.35	1.4	1.3	1.4	1.2	1.35	1.3	1.2
Stainless steel	0.3/0.6	0.3/0.9	0.5/0.9	NA/0.65	0.5/0.9	0.2/0.7	0.35/0.7	NA/0.25

11. These products have been tested to comply with IO-Link test specification IEC 61131-9. Environmental EMC and Physical Layer testing have not been performed with the device running in IO-Link mode.

Table 18. Surrounding Material

Surrounding Material Type	8 mm Diameter	12 mm Diameter	18 mm Diameter	30 mm Diameter
	Shielded			
Steel	1	0.7	0.75	0.9
Aluminum	0.9	1.15	0.9	0.7
Brass	0.9	1.05	0.75	0.6
Stainless steel	1	0.8	0.8	1.3

The following table shows the protrusion distance from the mounting device for the unshielded sensor face.

Table 19. Protrusion Distance

Surrounding Material Type	8 mm Diameter	12 mm Diameter	18 mm Diameter	30 mm Diameter
	Unshielded [mm (in.)]			
Steel	15 (0.59)	22 (0.87)	36 (1.42)	18 (0.71)
Aluminum	9 (0.35)	13 (0.51)	22 (0.87)	34 (1.34)
Brass	10 (0.39)	15 (0.59)	22 (0.87)	34 (1.34)
Stainless steel	14 (0.55)	21 (0.83)	43 (1.69)	18 (0.71)

Product Selection


Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.		
						PUR Cable Style	M12 Micro QD Style	M8 Pico QD Style
8 (0.31)	3 (0.12)	Yes	N.O.	NPN	≤ 700	871TM-M3NN8-J2	871TM-M3NN8-D4	871TM-M3NN8-P3
				PNP		871TM-M3NP8-J2	871TM-M3NP8-D4	871TM-M3NP8-P3
	6 (0.23)	No		NPN		871TM-N6NN8-J2	871TM-N6NN8-D4	871TM-N6NN8-P3
				PNP		871TM-N6NP8-J2	871TM-N6NP8-D4	871TM-N6NP8-P3
	3 (0.12)	Yes	N.C.	NPN		871TM-M3CN8-J2	871TM-M3CN8-D4	871TM-M3CN8-P3
				PNP		871TM-M3CP8-J2	871TM-M3CP8-D4	871TM-M3CP8-P3
	6 (0.23)	No		NPN		871TM-N6CN8-J2	871TM-N6CN8-D4	871TM-N6CN8-P3
				PNP		871TM-N6CP8-J2	871TM-N6CP8-D4	871TM-N6CP8-P3
12 (0.47)	6 (0.23)	Yes	N.O.	NPN	400	871TM-M6NN12-A2	871TM-M6NN12-D4	—

Inductive Proximity Sensor Specifications

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.		
						PUR Cable Style	M12 Micro QD Style	M8 Pico QD Style
				PNP		871TM-M6NP12-A2	871TM-M6NP12-D4	—
	10 (0.39)	No		NPN		871TM-N10NN12-A2	871TM-N10NN12-D4	—
				PNP		871TM-N10NP12-A2	871TM-N10NP12-D4	—
	6 (0.23)	Yes	N.C.	NPN		871TM-M6CN12-A2	871TM-M6CN12-D4	—
				PNP		871TM-M6CP12-A2	871TM-M6CP12-D4	—
	10 (0.39)	No		NPN		871TM-N10CN12-A2	871TM-N10CN12-D4	—
				PNP		871TM-N10CP12-A2	871TM-N10CP12-D4	—
18 (0.71)	10 (0.39)	Yes	N.O.	NPN	200	871TM-M10NN18-A2	871TM-M10NN18-D4	—
				PNP		871TM-M10NP18-A2	871TM-M10NP18-D4	—
	20 (0.79)	No		NPN		871TM-N20NN18-A2	871TM-N20NN18-D4	—
				PNP		871TM-N20NP18-A2	871TM-N20NP18-D4	—
	10 (0.39)	Yes	N.C.	NPN		871TM-M10CN18-A2	871TM-M10CN18-D4	—
				PNP		871TM-M10CP18-A2	871TM-M10CP18-D4	—
	20 (0.79)	No		NPN		871TM-N20CN18-A2	871TM-N20CN18-D4	—
				PNP		871TM-N20CP18-A2	871TM-N20CP18-D4	—
30 (1.18)	20 (0.79)	Yes	N.O.	NPN	80	871TM-M20NN30-A2	871TM-M20NN30-D4	—
				PNP		871TM-M20NP30-A2	871TM-M20NP30-D4	—
	40 (1.57)	No		NPN		871TM-N40NN30-A2	871TM-N40NN30-D4	—
				PNP		871TM-N40NP30-A2	871TM-N40NP30-D4	—
	20 (0.79)	Yes	N.C.	NPN		871TM-M20CN30-A2	871TM-M20CN30-D4	—
				PNP		871TM-M20CP30-A2	871TM-M20CP30-D4	—
	40 (1.57)	No		NPN		871TM-N40CN30-A2	871TM-N40CN30-D4	—
				PNP		871TM-N40CP30-A2	871TM-N40CP30-D4	—
Recommended cordset: 2 m (6.5 ft) 4-pin DC micro (straight)							889D-F4AC-2	889P-F3AB-2


Approximate Dimensions

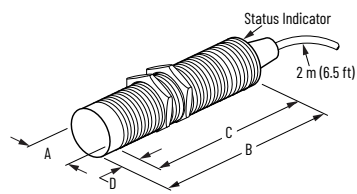Figure 60. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M8 x 1	Yes	8 (0.31)	46 (1.81)	45 (1.76)	—
	No			41 (1.61)	4 (0.16)
M12 x 1	Yes	12 (0.47)	51 (2.01)	50. (1.96)	—
	No			45 (1.77)	5 (0.19)
M18 x 1	Yes	18 (0.71)	51 (2.01)	50 (1.96)	—
	No			43 (1.69)	7 (0.27)
M30 x 1.5	Yes	30 (1.18)	51 (2.01)	50 (1.96)	—
	No			40 (1.57)	10 (0.39)

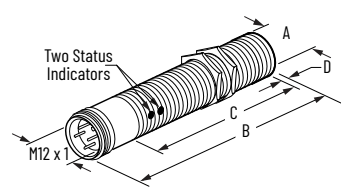
Figure 61. M12 Micro Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M8 x 1	Yes	8 (0.31)	66 (2.59)	46 (1.81)	—
	No			42 (1.65)	4 (0.16)
M12 x 1	Yes	12 (0.47)	60 (2.26)	41. (1.61)	—
	No			36 (1.42)	5 (0.19)
M18 x 1	Yes	18 (0.71)	63.5 (2.5)	42.5 (1.67)	—
	No			35.5 (1.4)	7 (0.27)

Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M30 x 1.5	Yes	30 (1.18)	63.5 (2.50)	42.5 (1.67)	—
	No			32.5 (1.28)	10 (0.39)

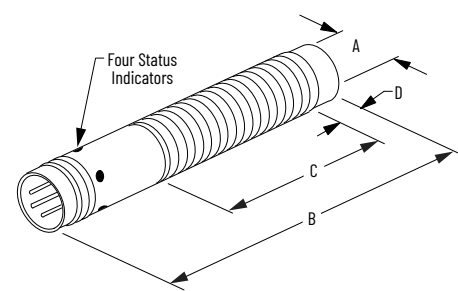Figure 62. M8 Pico Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B (Max)	C (Min)	D (Max)
M8 x 1	Yes	8 (0.31)	60 (2.36)	46 (1.81)	—
	No			42 (1.65)	4 (0.16)

Wiring Diagrams

Table 20. Cable Style

Normally Open	Normally Closed
<p>NPN (Sinking)</p> <p>PNP (Sourcing)</p>	<p>NPN (Sinking)</p> <p>PNP (Sourcing)</p>

Table 21. M12 Micro QD Style







Normally Open	Normally Closed
<p>NPN (Sinking)</p>  <p>PNP (Sourcing)</p> 	<p>NPN (Sinking)</p>  <p>PNP (Sourcing)</p> 

Table 22. M8 Pico Style

Normally Open	Normally Closed
<p>NPN (Sinking)</p> 	<p>PNP (Sourcing)</p> 

871TM 2-wire AC/DC All Stainless Steel Tubular Sensors

 <p>871TM AC/DC Cable Style 12 mm, 18 mm, and 30 mm Diameter</p>	 <p>871TM AC/DC Mini Quick Disconnect Style 12 mm, 18 mm, and 30 mm Diameter</p>	 <p>871TM AC Micro Quick Disconnect Style 12 mm, 18 mm, and 30 mm Diameter</p>	 <p>871TM AC/DC EAC M12 Micro Quick Disconnect Style 12 mm Diameter</p>	 <p>871TM AC/DC ToughLink Cable Style 12 mm, 18 mm, and 20 mm Diameter</p>
---	---	---	---	---

Specifications

Attribute	12 mm Diameter	18 mm and 30 mm Diameter
Load current	5...200 mA	5...250 mA
Inrush current (one cycle)	≤ 2 A	≤ 4 A
Leakage current	≤ 1.9 mA at 120V AC	
Operating voltage	20...250V AC/DC	
Voltage drop	≤ 10V at 5...200 mA	≤ 10V at 5...250 mA
Repeatability	≤ 10% at constant temperature	
Hysteresis	7% typical	
Protection type	False pulse, transient noise, short circuit (trigger at 5 A typical), and overload (trigger at 260 mA typical)	False pulse, transient noise, short circuit (trigger at 8 A typical), and overload (trigger at 320 mA typical)
Certifications	UL Listed, CSA Certified, CE Marked for all applicable directives, UKCA Marked for all applicable regulations, and CCC Certified (select models)	
Enclosure type rating	NEMA 1, 2, 3, 3R, 4, 4X, 6, 6P, 12, 13; IP67 (IEC 529) all models; 1200 psi (8270 kPa) washdown; ToughLink and micro connector versions are also rated IP69K (IEC 529)	
Housing material	Stainless steel face and threaded barrel	
Connection type	<ul style="list-style-type: none"> Cable: 2 m (6.5 ft) length; A2 - 2-conductor 22 AWG PVC, C2 - 2-conductor 22 AWG ToughLink, H2 - 3-conductor 18 AWG ToughLink Quick disconnect: 3-pin mini style, 3-pin micro style, 4-pin EAC M12 micro style 	
Status indicators	<ul style="list-style-type: none"> Red: Output energized Green: Power Short circuit: Red and green flashing 	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock	30 g (1.06 oz), 11 ms	

Inductive Proximity Sensor Specifications

Attribute	12 mm Diameter	18 mm and 30 mm Diameter
Vibration	55 Hz, 1 mm amplitude, 3 planes	

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.9...1.0
Brass	0.3...0.5
Aluminum	0.1...0.4
Aluminum (≤ 0.02 thick)	0.9...1.1
Copper	0.1...0.2

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shie Ided	Output Config.	Switching Frequency [Hz]	Cat. No.				
					PVC Cable	ToughLink Cable	Mini QD	Micro QD	EAC Micro
12 (0.47)	3 (0.12)	Yes	N.O.	35	871TM-B3N12-A2 12	871TM-B3N12-C2	871TM-B3N12-N3	871TM-B3N12-R3	—
			N.C.	30	871TM-B3C12-A2 12	871TM-B3C12-C2	871TM-B3C12-N3	871TM-B3C12-R3	—
	4 (0.16)	No	N.O.	20	871TM-B4N12-A2 12	871TM-B4N12-C2	871TM-B4N12-N3	871TM-B4N12-R3	871TM-B4N12-B4 12
			N.C.	15	871TM-B4C12-A2	871TM-B4C12-C2	871TM-B4C12-N3	871TM-B4C12-R3	—
18 (0.71)	5 (0.2)	Yes	N.O.	20	871TM-B5N18-A2 12	871TM-B5N18-H2	871TM-B5N18-N3	871TM-B5N18-R3	—
			N.C.	15	871TM-B5C18-A2	871TM-B5C18-H2	871TM-B5C18-N3	871TM-B5C18-R3	—
	8 (0.31)	No	N.O.	15	871TM-B8N18-A2 12	871TM-B8N18-H2 12	871TM-B8N18-N3	871TM-B8N18-R3	—
			N.C.	12	871TM-B8C18-A2 12	871TM-B8C18-H2	871TM-B8C18-N3	871TM-B8C18-R3	—
30 (1.18)	10 (0.39)	Yes	N.O.	15	871TM-B10N30-A2 12	871TM-B10N30-H2	871TM-B10N30-N3	871TM-B10N30-R3	—
			N.C.	12	871TM-B10C30-A2	871TM-B10C30-H2	871TM-B10C30-N3	871TM-B10C30-R3	—
	15 (0.59)	No	N.O.	12	871TM-B15N30-A2 12	871TM-B15N30-H2 12	871TM-B15N30-N3 12	871TM-B15N30-R3 12	—
			N.C.	10	871TM-B15C30-A2 12	871TM-B15C30-H2	871TM-B15C30-N3	871TM-B15C30-R3	—
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)							889N-F3AFC-6F	889R-F3ECA-2	889B-F3AC-2


Approximate Dimensions

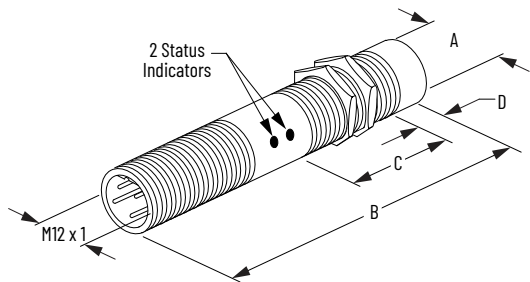Figure 63. EAC M12 Micro QD Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	No	12 (0.47)	83 (3.27)	31.7 (1.25)	9.4 (0.37)

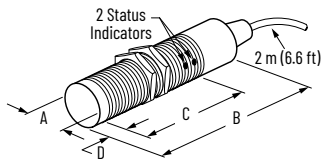Figure 64. Cable Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	72.1 (2.84)	38.4 (1.51)	2.5 (0.1)
	No			31.5 (1.24)	9.4 (0.37)
M18 x 1	Yes	18 (0.71)	74.7 (2.94)	60 (2.35)	2.5 (0.1)
	No			48.2 (1.9)	14.4 (0.56)
M30 x 1.5	Yes	30 (1.18)	77.2 (3.04)	61.3 (2.41)	2.5 (0.1)
	No			46.1 (1.81)	17.9 (0.7)

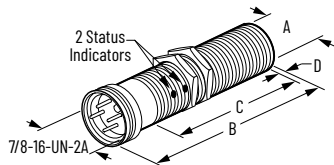Figure 65. Mini QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	85.6 (3.37)	37.8 (1.49)	2.5 (0.1)
	No			31.7 (1.25)	9.4 (0.37)
M18 x 1	Yes	18 (0.71)	56.1 (2.21)	54.9 (2.16)	2.5 (0.1)
	No			43.1 (1.7)	14.4 (0.56)
M30 x 1.5	Yes	30 (1.18)	68.1 (2.68)	61.3 (2.41)	2.5 (0.1)
	No			46.1 (1.81)	17.9 (0.7)

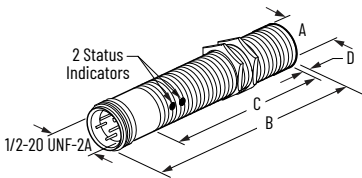
Figure 66. AC Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	83.4 (3.28)	38.4 (1.51)	2.5 (0.1)
	No			31.5 (1.24)	9.4 (0.37)
M18 x 1	Yes	18 (0.71)	84.3 (3.32)	60 (2.36)	2.5 (0.1)
	No			48.2 (1.9)	14.4 (0.56)
M30 x 1.5	Yes	30 (1.18)	85.7 (3.37)	61.3 (2.41)	2.5 (0.1)
	No			46.1 (1.81)	17.9 (0.7)

Wiring Diagrams

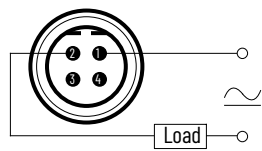Figure 67. EAC M12 Micro QD Style – N.O.



IMPORTANT:

- No ground pin. Attach housing to ground.
- Load can be switched to Pin 2.


Table 23. Cable Style

Normally Open (N.O)	Normally Closed (N.C.)

IMPORTANT:

- No green wire on 12 mm and on sensors with PVC cable (-A2). Attach housing to ground.
- Load can be switched to brown wire.


Figure 68. Mini QD Style – N.O. or N.C.



IMPORTANT:

- No ground pin on 12 mm. Attach housing to ground.
- Load can be switched to Pin 3.

Figure 69. AC Micro QD Style – N.O. or N.C.



IMPORTANT:

- No ground pin on 12 mm. Attach housing to ground.
- Load can be switched to Pin 2.

871TM 2-wire AC/DC PLC Interfacer

 <p>871TM AC/DC Cable Style 12 mm, 18 mm, and 30 mm Diameter</p>	 <p>871TM AC/DC Mini Quick Disconnect Style 12 mm, 18 mm, and 30 mm Diameter</p>	 <p>871TM AC Micro Quick Disconnect Style 12 mm, 18 mm, and 30 mm Diameter</p>	 <p>871TM AC/DC EAC M12 Micro Quick Disconnect Style 12 mm Diameter</p>	 <p>871TM AC/DC ToughLink Cable Style 12 mm, 18 mm, and 30 mm Diameter</p>
---	---	---	---	---

Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameter
Load current	2...25 mA
Leakage current	≤ 0.9 mA at 24V DC ≤ 1.7 mA at 20...120V AC/DC ≤ 2.5 mA at 121...250V AC/DC
Operating voltage	20...250V AC/DC (standard models) 20...132V AC/DC (high temperature models)
Voltage drop	≤ 8 V at 25 mA DC ≤ 10 V at 25 mA AC
Repeatability	10% typical
Hysteresis	10% typical
Protection type	False pulse, transient noise, radio frequency (10V per meter, frequency range 20...1000 MHz) ¹³
Certifications	UL Listed, CSA Certified, CE Marked for all applicable directives, UKCA Marked for all applicable regulations, and CCC Certified (select models)
Enclosure type rating	NEMA 1, 2, 3, 3R, 4, 4X, 6, 6P, 12, 13; IP67 (IEC 529) all models; 1200 psi (8270 kPa) washdown; ToughLink and micro connector versions are also rated IP69K (IEC 529)
Housing material	Stainless steel face and threaded short barrel
Connection type	<ul style="list-style-type: none"> Cable: 2 m (6.5 ft) length, A2 - 2-conductor 22 AWG PVC, C2 - 2-conductor 22 AWG ToughLink, H2 - 2-conductor 18 AWG ToughLink Quick disconnect: 3-pin mini style, 3-pin micro style, 4-pin EAC M12 micro style
Status indicators	Red: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F) (standard models) 0...100 °C (32...212 °F) (high temperature models)
Shock	30 g (1.06 oz), 11 ms (standard models)

13. Radio frequency protection is not available on high temperature models.

Inductive Proximity Sensor Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameter
	5 g (0.18 oz), 11 ms (high temperature models)
Vibration	55 Hz, 1 mm amplitude, 3 planes (standard models) 30...120 Hz, 1 mm amplitude, 3 planes (high temperature models)

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.8...1.0
Brass	0.4...0.7
Aluminum	0.4...0.7
Copper	0.1...0.2

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Config.	Switching Frequency [Hz]	Cat. No.				
					PVC Cable	ToughLink Cable	Mini QD	Micro QD	EAC Micro
12 (0.47)	2 (0.08)	Yes	N.O.	75	871TM-BH2N12-A2 14	871TM-BH2N12-C2 14	871TM-BH2N12-N3 14	871TM-BH2N12-R3 14	871TM-BH2N12-B4 14
	4 (0.16)	No		35	871TM-BH4N12-A2 14	871TM-BH4N12-C2	871TM-BH4N12-N3	871TM-BH4N12-R3	—
	2 (0.08)	Yes	N.C.	75	—	—	—	871TM-BH2C12-R3	—
	4 (0.16)	No		35	—	—	—	871TM-BH4C12-R3	—
18 (0.71)	5 (0.2)	Yes	N.O.	65	871TM-BH5N18-A2 14	871TM-BH5N18-H2	871TM-BH5N18-N3 15	871TM-BH5N18-R3	—
	8 (0.31)	No		30	871TM-BH8N18-A2 14	871TM-BH8N18-H2 16	871TM-BH8N18-N3 17	871TM-BH8N18-R3	—
	5 (0.2)	Yes	N.C.	65	—	—	—	871TM-BH5C18-R3	—
	8 (0.31)	No		30	—	—	—	871TM-BH8C18-R3	—
30 (1.18)	10 (0.39)	Yes	N.O.	45	871TM-BH10N30-A2 14	871TM-BH10N30-H2	871TM-BH10N30-N3 18	871TM-BH10N30-R3 14	—
	15 (0.59)	No		20	871TM-BH15N30-A2 14	871TM-BH15N30-H2	871TM-BH15N30-N3	871TM-BH15N30-R3	—
	10 (0.39)	Yes	N.C.	45	871TM-BH10C30-A2	871TM-BH10C30-H2	871TM-BH10C30-N3	871TM-BH10C30-R3	—
	15 (0.59)	No		20	871TM-BH15C30-A2	871TM-BH15C30-H2	871TM-BH15C30-N3	871TM-BH15C30-R3	—
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)							889N-F3AFC-6F	889R-F3ECA-2	889B-F3AC-2

14. CCC Certified

15. For a high temperature model, order Cat. No. 871TM-BX21-N3.


16. For a high temperature model, order Cat. No. 871TM-BX22-H2.

17. For a high temperature model, order Cat. No. 871TM-BX22-N3.

18. For a high temperature model, order Cat. No. 871TM-BX23-N3.


Approximate Dimensions

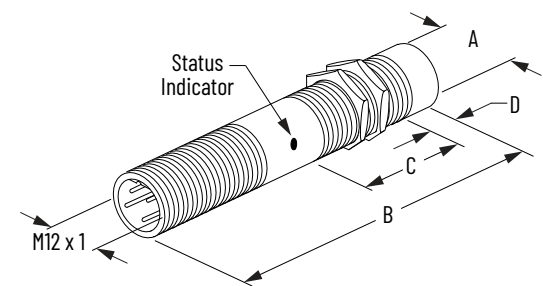Figure 70. EAC M12 Micro QD Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	No	12 (0.47)	61 (2.4)	26.4 (1.04)	2.5 (0.1)

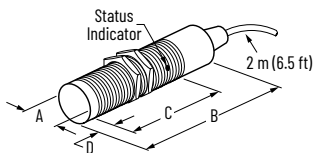Figure 71. Cable Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	49.8 (1.96)	26.4 (1.04)	2.5 (0.1)
	No			19.5 (0.77)	9.4 (0.37)
M18 x 1	Yes	18 (0.71)	55.4 (2.18)	41.7 (1.64)	2.5 (0.1)
	No				14.5 (0.57)
M30 x 1.5	Yes	30 (1.18)	57.9 (2.28)	41.9 (1.65)	2.5 (0.1)
	No			39.4 (1.55)	18 (0.71)

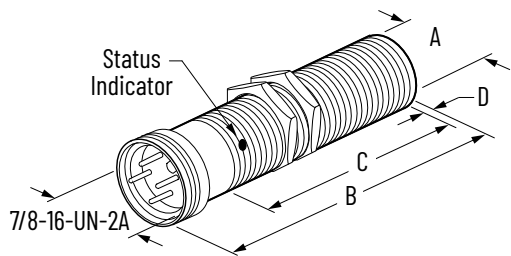Figure 72. Mini QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	63.5 (2.5)	25.4 (1)	2.5 (0.1)
	No			18.5 (0.73)	9.4 (0.37)
M18 x 1	Yes	18 (0.71)	56.1 (2.21)	35.1 (1.38)	2.5 (0.1)
	No			29.2 (1.15)	14.5 (0.57)
M30 x 1.5	Yes	30 (1.18)	68.1 (2.68)	49.1 (1.65)	2.5 (0.1)
	No			39.4 (1.55)	18 (0.71)

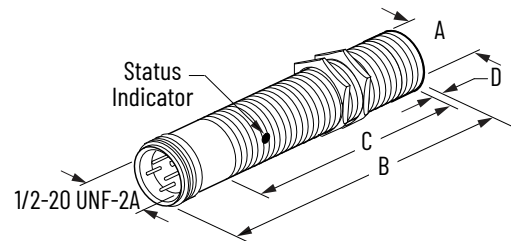
Figure 73. Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	83.4 (3.28)	26.4 (1.04)	2.5 (0.1)
	No			19.6 (0.77)	9.4 (0.37)
M18 x 1	Yes	18 (0.71)	84.3 (3.32)	41.7 (1.64)	2.5 (0.1)
	No				14.5 (0.57)
M30 x 1.5	Yes	30 (1.18)	85.7 (3.37)	41.9 (1.65)	2.5 (0.1)
	No			39.4 (1.55)	18 (0.71)

Wiring Diagrams

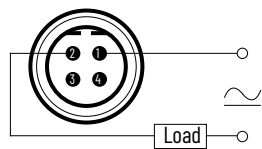
Figure 74. EAC M12 Micro QD Style – N.O.



IMPORTANT:

- No ground pin. Attach housing to ground.
- Load can be switched to Pin 2.

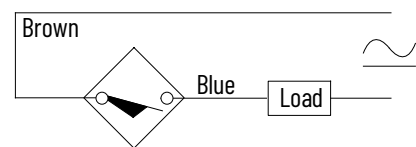
Figure 75. Cable Style – N.O.



IMPORTANT:

- Attach housing to ground.
- Load can be switched to brown wire.

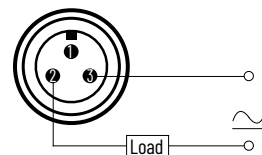
Figure 76. Mini QD Style – N.O.



IMPORTANT:

- Attach housing to ground.
- Load can be switched to Pin 3.

Figure 77. Micro QD Style – N.O. or N.C.



IMPORTANT:

- No ground pin on 12 mm. Attach housing to ground.
- Load can be switched to Pin 3.

871TS Food and Beverage



871TS DC M12 Micro Quick Disconnect Style
12 mm and 18 mm Diameter

Specifications

Attribute	12 mm and 18 mm Diameter
Load current	≤ 200 mA
Leakage current	≤ 15 µA
Operating voltage	10...30V DC
Voltage drop	≤ 2.0V
Repeatability	≤ 5%
Hysteresis	≤ 10% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 3R, 4, 4X, 6, 6P, 12, 13; IP67, IP68, and IP69K
Housing material	Stainless steel 316L barrel, PPS (FDA Certified) plastic face
Connection type	Quick disconnect: 4-pin M12 micro style
Status indicator	Yellow: Output energized
Operating temperature	-40...+80 °C (-40...+176 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0

Inductive Proximity Sensor Specifications


Target Material	Correction Factors
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.
						Micro QD Cable
12 (0.47) threaded	2 (0.08)	Yes	N.O. and N.C.	NPN	2000	871TS-D2BN12-D4
				PNP		871TS-D2BP12-D4
	4 (0.16)	Yes		NPN	2000	871TS-M4BN12-D4
				PNP		871TS-M4BP12-D4
	4 (0.16)	No		NPN	2000	871TS-D4BN12-D4
				PNP		871TS-D4BP12-D4
	8 (0.31)	No		NPN	2000	871TS-N8BN12-D4
				PNP		871TS-N8BP12-D4
18 (0.71) threaded	5 (0.2)	Yes	N.O. and N.C.	NPN	1500	871TS-D5BN18-D4
				PNP		871TS-D5BP18-D4
	8 (0.31)	Yes		NPN	1500	871TS-M8BN18-D4
				PNP		871TS-M8BP18-D4
	8 (0.31)	No		NPN	1500	871TS-D8BN18-D4
				PNP		871TS-D8BP18-D4
	12 (0.47)	No		NPN	1500	871TS-N12BN18-D4
				PNP		871TS-N12BP18-D4
18 (0.71) smooth	8(0.31)	Yes	N.O. and N.C.	PNP	1500	871TS-MM8BP18-D4
	12(0.47)	No		PNP	1500	871TS-NM12BP18-D4
Recommended standard QD cordset: -2 = 2 m (6.5 ft)						889D-F4AC-2

Approximate Dimensions

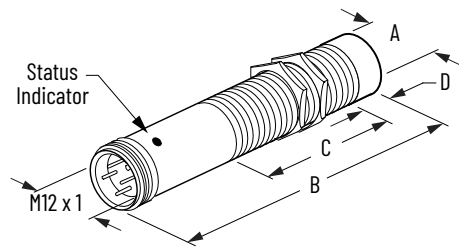Figure 78. Micro QD Style



Barrel Type	Thread Size	Shielded	Dimensions [mm (in.)]			
			A	B	C	D
Threaded	M12 x 1	Yes	12 (0.47)	65 (2.56)	38.1 (1.5)	—
		No			32.5 (1.28)	6.5 (0.26)
	M18 x 1	Yes	18 (0.71)	63 (2.48)	34.5 (1.36)	—
		No			26.5 (1.04)	8 (0.31)
Smooth	18 x 1	Yes	18 (0.71)	63 (2.48)	—	—
		No			—	8 (0.31)

Wiring Diagrams

Table 24. Micro QD Style – N.O. or N.C.

NPN (Sinking)	PNP (Sourcing)
<p>The NPN (Sinking) wiring diagram shows a sensor with two pins. The top pin is connected to a load (N.C.) and the bottom pin is connected to a load (N.O.). Both loads are connected to a 10...30V DC source. The sensor is shown with a cross-section view.</p>	<p>The PNP (Sourcing) wiring diagram shows a sensor with two pins. The top pin is connected to a load (N.C.) and the bottom pin is connected to a load (N.O.). Both loads are connected to a 10...30V DC source. The sensor is shown with a cross-section view.</p>

IMPORTANT:

- No ground pin on 12 mm. Attach housing to ground.
- Load can be switched to Pin 3.

871Z 3-wire DC Weld Field Immune Sensors



871Z DC Mini Quick Disconnect Style
18 mm and 30 mm Diameter



871Z DC M12 Micro Quick Disconnect Style
12 mm, 18 mm, and 30 mm Diameter

Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameter
Load current	≤ 200 mA
Load current, min	1 mA
Leakage current	≤ 10 µA
Operating voltage	10...30V DC
Voltage drop	≤ 2.4V
Repeatability	≤ 10%
Hysteresis	≤ 15% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload
Weld field immunity	20,000 A at 25.4 mm (1 in.)
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 12 and 13; IP67 (IEC529)
Housing material	Threaded PTFE-coated brass barrel and PTFE face
Connection type	Quick disconnect: 4-pin mini style, 4-pin M12 micro style
Status indicator	Red: Output Energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.3...0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						Mini QD Style	M12 Micro QD Style
12 (0.47)	2 (0.08)	Yes	N.O.	PNP	15	—	871Z-DW2NP12-D4
18 (0.71)	5 (0.2)					871Z-DW5NP18-N4	871Z-DW5NP18-D4
30 (1.18)	10 (0.39)					871Z-DW10NP30-N4	871Z-DW10NP30-D4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F4AFC-6F	889D-F4WE-2


Approximate Dimensions

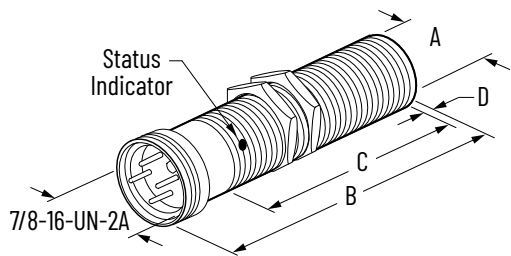Figure 79. Mini QD Style



Thread Size	Shielded	Dimensions [mm (in.)]		
		A	B	C
M18 x 1	Yes	18 (0.71)	90 (3.54)	53 (2.09)
M30 x 1		30 (1.18)	90 (3.54)	56 (2.2)

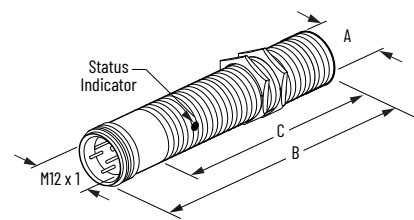Figure 80. M12 Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]		
		A	B	C
M12 x 1	Yes	12 (0.47)	70 (2.76)	50 (1.97)
M18 x 1		18 (0.71)	80 (3.15)	60 (2.36)
M30 x 1		30 (1.18)	80 (3.15)	60 (2.36)

Wiring Diagrams

Figure 81. Mini QD Style – N.O.


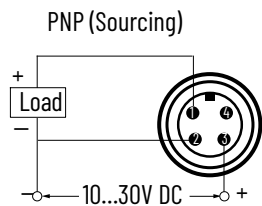


Figure 82. M12 Micro QD Style – N.O.

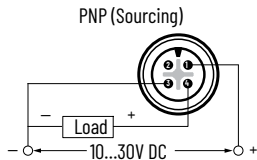

871Z 2-wire AC/DC Weld Field Immune Sensors



871Z AC/DC Cable Style
18 mm and 30 mm Diameter



871Z AC/DC Mini Quick Disconnect Style
12 mm, 18 mm, and 30 mm Diameter



871Z AC Micro Quick Disconnect Style
12 mm, 18 mm, and 30 mm Diameter

Specifications

Attribute	12 mm Diameter	18 mm and 30 mm Diameter
Load current	5...200 mA	5...250 mA
Inrush current (one cycle)	≤ 2 A	≤ 4 A
Leakage current	≤ 1.9 mA at 120V AC	
Operating voltage	20...250V AC/DC	
Voltage drop	≤ 10V at 5...200 mA	≤ 10V at 5...250 mA
Repeatability	≤ 10% at constant temperature	
Hysteresis	7% typical	
Protection type	Short circuit (trigger at 5 A typical), false pulse, reverse polarity (DC output), overload (trigger at 260 mA typical), and transient noise	Short circuit (trigger at 8 A typical), false pulse, reverse polarity (DC output), overload (trigger at 320 mA typical), and transient noise
Weld field immunity	20,000 A at 25.4 mm (1 in.)	
Certifications	UL Listed, CSA Certified, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 1, 2, 3, 3R, 4, 4X, 6, 6P, 12, 13; IP67 (IEC529)	
Housing material	Threaded PTFE-coated brass barrel and thermoset plastic face	
Connection type	<ul style="list-style-type: none"> Cable: 2 m (6.5 ft) length; H2 - 3 conductor 18 AWG ToughLink Quick disconnect: 3-pin micro style, 3-pin mini style 	
Status indicator	<ul style="list-style-type: none"> Red: Output energized Red flashing: Short circuit/overload Green: Power 	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock	30 g (1.06 oz), 11 ms	
Vibration	55 Hz, 1 mm amplitude, 3 planes	

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.3...0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.		
					Cable Style	Mini QD Style	Micro QD Style
12 (0.47)	2 (0.08)	Yes	N.O.	30	—	871Z-BW2N12-N3	871Z-BW2N12-R3
			N.C.	20	—	871Z-BW2C12-N3	871Z-BW2C12-R3
	4 (0.16)	No	N.O.	30	—	871Z-BW4N12-N3	871Z-BW4N12-R3
			N.C.	20	—	871Z-BW4C12-N3	871Z-BW4C12-R3
18 (0.71)	5 (0.2)	Yes	N.O.	30	871Z-BW5N18-H2	871Z-BW5N18-N3	871Z-BW5N18-R3
			N.C.	20	871Z-BW5C18-H2	871Z-BW5C18-N3	871Z-BW5C18-R3
30 (1.18)	10 (0.39)	Yes	N.O.	30	871Z-BW10N30-H2	871Z-BW10N30-N3	871Z-BW10N30-R3
			N.C.	20	871Z-BW10C30-H2	871Z-BW10C30-N3	—
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3WFC-6F	889R-F3WEA-2


Approximate Dimensions

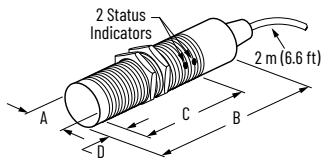Figure 83. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)] ¹⁹			
		A	B	C	D
M18 x 1	Yes	18 (0.71)	74.68 (2.94)	61.6 (2.43)	0.8 (0.03)
M30 x 1	No	30 (1.18)	77.52 (3.05)	64.3 (2.53)	

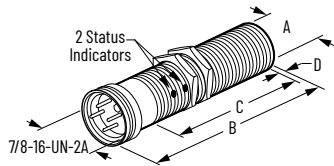
Figure 84. Mini QD Style



Thread Size	Shielded	Dimensions [mm (in.)] ¹⁹			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	93.45 (3.68)	46.2 (1.82)	0.8 (0.03)
	No			40.7 (1.52)	8.1 (0.32)
M18 x 1	Yes	18 (0.71)	75.82 (2.99)	57.28 (2.26)	0.8 (0.03)
M30 x 1	No	30 (1.18)	86.66 (3.41)	64.3 (2.53)	0.8 (0.03)

19. Rear portion of barrel left uncoated for ground contact on 12 mm models

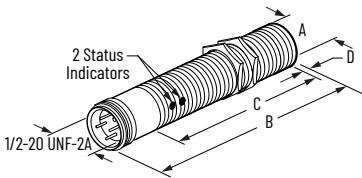Figure 85. Micro QD Style




Thread Size	Shielded	Dimensions [mm (in.)] 19			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	90.1 (3.55)	46.7 (1.85)	0.8 (0.03)
	No			39.7 (1.56)	8.1 (0.32)
M18 x 1	Yes	18 (0.71)	83.5 (3.29)	61.6 (2.43)	0.8 (0.03)
M30 x 1	No	30 (1.18)	86 (3.38)	64.3 (2.53)	0.8 (0.03)

Wiring Diagrams

Table 25. Cable Style

Normally Open (N.O.)	Normally Closed (N.C.)


Figure 86. Mini QD Style – N.O.



IMPORTANT:

- No ground pin on 12 mm. Attach hosing to ground.
- Load can be switched to Pin 3.

Figure 87. Micro QD Style – N.O. or N.C.



IMPORTANT:

- No ground pin on 12 mm. Attach hosing to ground.
 - Load can be switched to Pin 2.
-

871ZT 3-wire DC Weld Field Immune/Equal Sensing Sensors



871ZT DC M12 Micro Quick Disconnect Style
12 mm, 18 mm, and 30 mm Diameter

Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameter
Load current, max	200 mA
Load current, min	1 mA
Leakage current	< 0.08 mA
Operating voltage	10...30V DC
Voltage drop	≤ 2.5V
Repeatability	≤ 5% typical
Hysteresis	≤ 10% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload
Weld field immunity	Up to 1260 Gauss (M5)
Certifications	UL Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	IP67 (IEC 529)
Housing material	Threaded PTFE-coated brass barrel and PTFE face
Connection type	Quick disconnect: 4-pin M12 micro style
Status indicator	360° status indicator visibility; Orange: Target present
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.9...1.1
Brass	0.9...1.1
Aluminum	0.9...1.1
Copper	0.9...1.1

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.
						Micro QD Style
12 (0.47)	3 (0.12)	Yes	N.O.	PNP	2000	871ZT-MB3NP12-D4
	8 (0.31)	No				871ZT-NB8NP12-D4
18 (0.71)	5 (0.2)	Yes			2500	871ZT-MB5NP18-D4
	12 (0.47)	No				871ZT-NB12NP18-D4
30 (1.18)	10 (0.39)	Yes			600	871ZT-MB10NP30-D4
	20 (0.79)	No			1000	871ZT-NB20NP30-D4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889D-F4WE-2

Approximate Dimensions

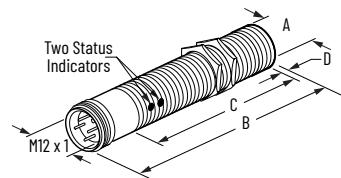
Figure 88. M12 Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	65 (2.56)	50 (1.97)	—
	No			40 (1.58)	10 (0.39)
M18 x 1	Yes	—		50 (1.97)	—
	No	18 (0.71)		40.5 (1.59)	10 (0.39)
M30 x 1	Yes	—		50.5 (1.99)	—
	No	30 (1.18)		37.5 (1.48)	13 (0.51)

Wiring Diagrams

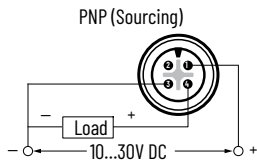Figure 89. M12 Micro QD Style – N.O.



872C WorldProx 2-wire DC Sensors



DC Cable Style
12 mm, 18 mm, and 30 mm DC



M12 Micro Quick Disconnect Style
12 mm, 18 mm, and 30 mm

Specifications

Attribute	12 mm, 18 mm, and 30 mm Diameters
Load current	≤ 100 mA (5 mA, min)
Leakage current	≤ 0.9 mA
Operating voltage	10...30V DC
Voltage drop	≤ 6V
Repeatability	≤ 2%
Hysteresis	10% typical
Protection type	Reverse polarity, transient noise, short circuit, overload, and false pulse
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6P, 12, 13, IP67 (IEC 529) Nickel-plated brass barrel, plastic face (PBT)
Housing material	Threaded nickel-plated brass barrel and plastic face
Connections	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) length, 4.4 mm (0.175 in.) diameter, 2-conductor 26 AWG PVCQuick disconnect: 4-pin micro style
Status indicator	Red: Output energized, 360° visibility
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g, 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors


Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.	
					Cable Style	Micro QD Style
12 (0.47)	3 (0.12)	Yes	N.O.	2000	872C-D3NE12-A2	872C-D3NE12-D4
			N.C.		872C-D3CE12-A2	872C-D3CE12-D4
	4 (0.16)	No	N.O.		872C-D4NE12-A2	872C-D4NE12-D4
			N.C.		872C-D4CE12-A2	872C-D4CE12-D4
18 (0.71)	5 (0.2)	Yes	N.O.	1000	872C-D5NE18-A2	872C-D5NE18-D4
			N.C.		872C-D5CE18-A2	872C-D5CE18-D4
	8 (0.31)	No	N.O.		872C-D8NE18-A2	872C-D8NE18-D4
			N.C.		872C-D8CE18-A2	872C-D8CE18-D4
30 (1.18)	10 (0.39)	Yes	N.O.	500	872C-D10NE30-A2	872C-D10NE30-D4
			N.C.		872C-D10CE30-A2	872C-D10CE30-D4
	15 (0.59)	No	N.O.		872C-D15NE30-A2	872C-D15NE30-D4
			N.C.		872C-D15CE30-A2	872C-D15CE30-D4
Recommended standard QD cordset: -2 = 2 m (6.5 ft)						889D-F4AC-2


Approximate Dimensions

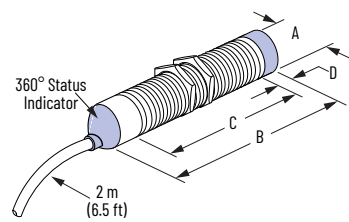Figure 90. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B (Max)	C (Min)	D (Max)
M12 x 1	Yes	12 (0.47)	50.8 (2)	46.7 (1.84)	—
	No		58.7 (2.31)		7.9 (0.31)
M18 x 1	Yes	18 (0.71)	50.8 (2)		—
	No		63 (2.48)		12.2 (0.48)
M30 x 1.5	Yes	30 (1.18)	50.8 (2)		—
	No		63 (2.48)		12.2 (0.48)


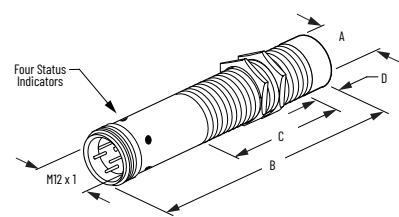
Figure 91. M12 Micro Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B (Max)	C (Min)	D (Max)
M12 x 1	Yes	12 (0.47)	65 (2.56)	38.1 (1.5)	—
	No		72.4 (2.85)		7.9 (0.31)
M18 x 1	Yes	18 (0.71)	65 (2.56)		—
	No		76.5 (3.01)		12.2 (0.48)
M30 x 1.5	Yes	30 (1.18)	65 (2.56)	46.7 (1.84)	—
	No		76.5 (3.01)		12.2 (0.48)


Wiring Diagrams

Table 26. Cable Style

Normally Open (N.O.)	Normally Closed (N.C.)
	

IMPORTANT: Load can be switched to brown wire.

Figure 92. M12 Micro Style – N.O. or N.C.



IMPORTANT: Load can be switched to Pin 3.

872C WorldProx QuadroPlex 2-wire DC Sensors



DC M12 Micro Quick Disconnect Style
12 mm, 18 mm, and 30 mm

Specifications

Attribute	12 mm Diameter	18 mm and 30 mm Diameters
Load current	100 mA (5 mA, min)	200 mA (5 mA, min)
Leakage current	≤ 1 mA	
Operating voltage	10...30V DC	
Voltage drop	≤ 6V at 100 mA	≤ 6.5V at 200 mA ≤ 6V at 100 mA
Repeatability	≤ 10% at constant temperature	
Hysteresis	10% typical	
Protection type	Transient noise, short circuit, overload, and false pulse	
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 1, 2, 3, 4, 6P, 12, 13, IP67 (IEC 529) Nickel-plated brass barrel, plastic face (PBT)	
Housing material	Threaded nickel-plated brass barrel and plastic face	
Connections	Quick disconnect: 4-pin M12 micro style	
Status indicator	Red: Output energized, 360° visibility	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock	30 g, 11 ms	
Vibration	55 Hz, 1 mm amplitude, 3 planes	

Correction Factors


Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
					Micro QD Style
12 (0.47)	3 (0.12)	Yes	N.O. or N.C.	2000	872C-M3Q12-D4
	4 (0.16)	No			872C-N4Q12-D4
18 (0.71)	5 (0.2)	Yes		1000	872C-M5Q18-D4
	8 (0.31)	No			872C-N8Q18-D4
30 (1.18)	10 (0.39)	Yes		500	872C-M10Q30-D4
	15 (0.59)	No			872C-N15Q30-D4
Recommended standard QD cordset: -2 = 2 m (6.5 ft)					889D-F4AC-2

Approximate Dimensions

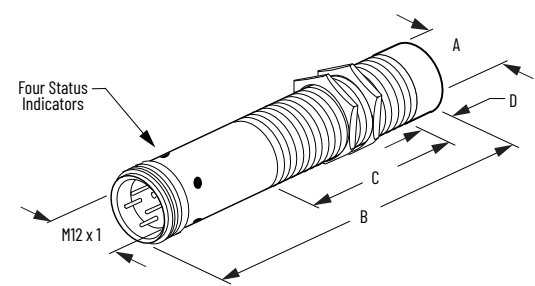Figure 93. M12 Micro Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B (Max)	C (Min)	D (Max)
M12 x 1	Yes	12 (0.47)	65 (2.56)	38.1 (1.5)	—
	No		72.4 (2.85)		7.9 (0.31)
M18 x 1	Yes	18 (0.71)	65 (2.56)		—
	No		76.5 (3.01)		12.2 (0.48)
M30 x 1.5	Yes	30 (1.18)	65 (2.56)		—
	No		76.5 (3.01)		12.2 (0.48)

Wiring Diagrams

Table 27. M12 Micro Style

Normally Open (N.O.)	Normally Closed (N.C.)
<p>PNP (Sourcing) Output</p>	<p>PNP (Sourcing) Output</p>
<p>NPN (Sinking) Output</p>	<p>NPN (Sinking) Output</p>

872C WorldProx Long Range Sensing 3-wire DC Sensors



DC M12 Micro Quick Disconnect Style
6.5 mm, 8 mm, 12 mm, 18 mm, and 30 mm



DC Pico Quick Disconnect Style
6.5 mm and 8 mm

Specifications

Attribute	6.5, 8, 12, 18, and 30 mm Diameters
Load current	≤ 200 mA
Leakage current	≤ 0.1 mA
Operating voltage	10...30V DC
Voltage drop	≤ 2V
Repeatability	≤ 5%
Hysteresis	10% typical
Protection type	Reverse polarity, transient noise, short circuit, overload, and false pulse
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6P, 12, 13, IP67 (IEC 529) Chrome-plated brass barrel, plastic face (PBT)
Housing material	Threaded chrome-plated brass barrel and plastic face
Connections	Quick disconnect: 4-pin M12 micro style and 3-pin Pico style
Status indicator	Amber: Output energized, 360° visibility
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g, 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factor
Steel	1.0

Target Material	Correction Factor
Stainless steel	0.6...0.8
Brass	0.3...0.6
Aluminum	0.3...0.5
Copper	0.2...0.5


IMPORTANT: Special mounting and installation considerations can be necessary due to the long-range sensing capabilities of these products. The [Inductive Proximity Sensors Basics on page 7](#) and [Applications on page 23](#) sections of the catalog must be used as a guideline. See pages [Space Between Shielded Sensors \(Flush-mount\) and Metal Surfaces on page 13](#) and [Space Between Unshielded Sensors \(Nonflush-mount\) and Metal Surfaces on page 16](#).

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						M12 Micro QD Style	Pico QD Style
6.5 (0.26)	3 (0.12)	Yes	N.O.	NPN	1000	872C-M3NN7-D4	872C-M3NN7-P3
				PNP		872C-M3NP7-D4	872C-M3NP7-P3
8 (0.31)	6 (0.23)	No	N.O.	NPN	500	872C-N6NN8-D4	872C-N6NN8-P3
				PNP		872C-N6NP8-D4	872C-N6NP8-P3
12 (0.47)	6 (0.23)	Yes	N.O.	NPN	800	872C-M6NN12-D4	—
				PNP		872C-M6NP12-D4	—
	10 (0.39)	No	N.O.	NPN	400	872C-N10NN12-D4	—
				PNP		872C-N10NP12-D4	—
18 (0.71)	12 (0.47)	Yes	N.O.	NPN	500	872C-M12NN18-D4	—
				PNP		872C-M12NP18-D4	—
	20 (0.79)	No	N.O.	NPN	200	872C-N20NN18-D4	—
				PNP		872C-N20NP18-D4	—
30 (1.18)	22 (0.86)	Yes	N.O.	NPN	200	872C-M22NN30-D4	—
				PNP		872C-M22NP30-D4	—
	40 (1.57)	No	N.O.	NPN	100	872C-N40NN30-D4	—
				PNP		872C-N40NP30-D4	—
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889D-F4AC-2	889P-F3AB-2


Approximate Dimensions

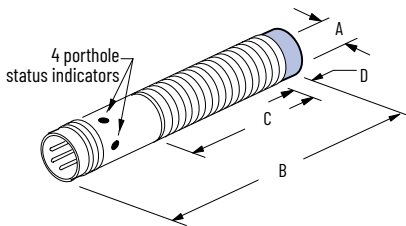Figure 94. Pico QD Style



Thread Size	Smooth Diameter [mm (in.)]	Shielded	Dimensions [mm (in.)]			
			A	B (Max)	C (Min)	D (Max)
—	6.5 (0.26)	Yes	6.5 (0.26)	60 (2.36)	—	—
M8 x 1	—	No	8 (0.31)	60 (2.36)	41.5 (1.63)	4 (0.15)

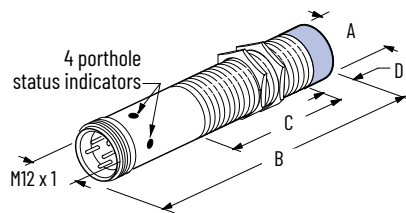Figure 95. M12 Micro QD Style



Thread Size	Smooth Diameter [mm (in.)]	Shielded	Dimensions [mm (in.)]			
			A	B (Max)	C (Min)	D (Max)
—	6.5 (0.26)	Yes	6.5 (0.26)	66 (2.59)	—	—
M8 x 1	—	No	8 (0.31)	66 (2.59)	40 (1.57)	4 (0.15)
M12 x 1	—	Yes	12 (0.47)	60 (2.36)	40 (1.57)	—
		No			35.3 (1.38)	5.7 (0.22)
M18 x 1	—	Yes	18 (0.71)	63.5 (2.5)	42 (1.65)	—
		No			32 (1.25)	10 (0.39)
M30 x 1.5	—	Yes	30 (1.18)	73.5 (2.89)	52 (2.04)	—
		No			42 (1.65)	10 (0.39)

Wiring Diagrams

Table 28. Pico QD Style

Normally Open (N.O) or Normally Closed (N.C.)


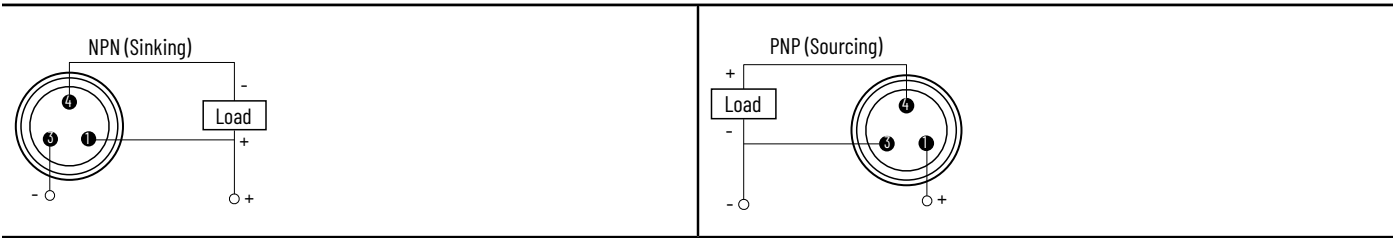


Table 29. M12 Micro QD Style

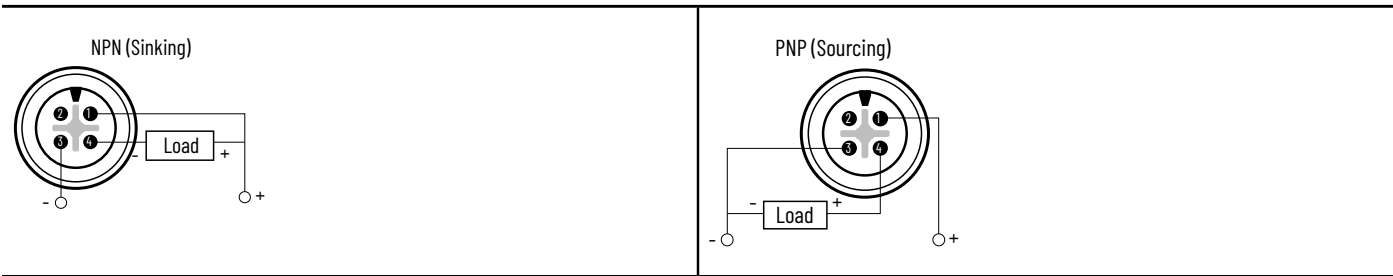Normally Open (N.O)



872C WorldProx 3- and 4-wire DC - Standard and Extended Sensing Sensors

 <p>DC Micro Quick Disconnect Style 8 mm, 12 mm, 18 mm, and 30 mm</p>	 <p>DC Pico Quick Disconnect Style 6.5 mm, 8 mm, and 12 mm</p>	 <p>DC Cable Style 6.5 mm, 8 mm, 12 mm, 18 mm, and 30 mm</p>	 <p>Pigtail Cable with Integral Micro QD Connector 8 mm, 12 mm, 18 mm, and 30 mm</p>
--	---	--	---

Specifications

Attribute	8 mm	12 mm	18 mm	30 mm
Load current	≤ 100 mA	≤ 200 mA		
Leakage current	≤ 5 μA	≤ 20 μA		
Operating voltage	5...30V DC	10...30V DC		
Voltage drop	≤ 1.5V	< 1V		
Switching frequency	≤ 2500 Hz	≤ 2650 Hz 20	≤ 1950 Hz 20	≤ 1150 Hz 20
No-load supply current	≤ 10 mA	<15 mA		
Repeatability	≤ 5%			
Hysteresis	≤ 10% typical	5% typical		
Protection type	False pulse on power, transient noise, reverse polarity, short circuit, and overload			
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations			
Enclosure type rating	IP67	IP67, IP68 — 24 hr at 1 m (3.3 ft)		
Housing material	Nickel-plated brass barrel nuts with integral locking feature, plastic face (LCP)	White bronze-plated brass barrel nuts with integral locking feature, plastic face (PBT)		
Connections	<ul style="list-style-type: none">Cable (PVC/PUR): 2 m (6.5 ft), 5 m (16.4 ft), 10 m (32.8 ft) length, 3.5 mm (0.138 in.) diameter (PVC); 3.3 mm diameter (PUR); 3 x 0.14 mm² PVC or PPCable (Pigtail): 0.2 m (0.7 ft), 0.5 m (1.6 ft), 1 m (3.3 ft) lengthConnector: 3-pin M12 or 3-pin M8	<ul style="list-style-type: none">Cable (PVC/PUR): 2 m (6.5 ft), 5 m (16.4 ft), 10 m (32.8 ft) length, 4.3 mm (0.17 in.) diameter; 3 x 0.34 mm² (0.01 in.²) or 4 x 0.34 mm² PVC or PURCable (Pigtail): 0.2 m (0.7 ft), 0.5 m (1.6 ft), 1 m (3.3 ft) length, integral connector (M12) 3 or 4-pin micro QDQuick disconnect: 3 or 4-pin micro QD (M12) or [3-pin Pico QD (M8) for 12 mm only]		

20. Select models have switching frequency less than previously specified. See [Product Selection — Standard Range on page 109](#) and [Product Selection — Extended Range on page 110](#) for specific switching frequency of each model.

Inductive Proximity Sensor Specifications

Attribute	8 mm	12 mm	18 mm	30 mm
Status indicator	Amber: Output energized			
Operating temperature	-25...+70 °C (-13...+158 °F)	-40...+85 °C (-40...+185 °F)		
Shock	30 g (1.06 oz), 11 ms half-sine			
Vibration	55 Hz, 1 mm amplitude, 3 planes			

Nominal Sensing Distance

Size	Description	Dimensions [mm (in.)]	
		Standard Sensing Range	Extended Sensing Range
6.5 mm	Shielded	2 (0.08)	—
	Unshielded	3 (0.12)	—
8 mm	Shielded	2 (0.08)	3 (0.12)
	Unshielded	3 (0.12)	4 (0.16)
12 mm	Shielded	—	4 (0.16)
	Unshielded	4 (0.16)	8 (0.31)
18 mm	Shielded	5 (0.2)	8 (0.31)
	Unshielded	8 (0.31)	12 (0.47)
30 mm	Shielded	10 (0.39)	15 (0.59)
	Unshielded	15 (0.59)	25 (0.98)

Correction Factors

Target Material	6.5 mm	8 mm	12 mm	18 mm	30 mm
Steel	1.0	1.0	1.0	1.0	1.0
Stainless steel	0.7...0.8	0.7...0.8	0.79...0.85	0.73...0.75	0.7...0.74
Brass	0.45...0.55	0.45...0.55	0.49...0.55	0.44...0.55	0.46...0.53
Aluminum	0.3...0.4	0.45...0.55	0.4...0.47	0.35...0.49	0.4...0.5
Copper	0.2...0.3	0.35...0.45	0.35...0.43	0.29...0.46	0.37...0.43

Product Selection — Standard Range

Table 30. Standard Barrel

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.			
						Cable Style	Micro QD Style	Pico QD Style	Pigtail Style
8 (0.31)	2 (0.08)	Yes	N.O.	PNP	2500	872C-D2NP8-E2 21	872C-D2NP8-D4	872C-D2NP8-P3	872C-D2NP8-FD05
				NPN		872C-D2NN8-E2 21	872C-D2NN8-D4	872C-D2NN8-P3	—
			N.C.	PNP		872C-D2CP8-E2 21	872C-D2CP8-D4	872C-D2CP8-P3	—
	3 (0.12)	No	N.O.	PNP		872C-D3NP8-E2	872C-D3NP8-D4	872C-D3NP8-P3	—
				NPN		—	872C-D3NN8-D4	872C-D3NN8-P3	—
			N.C.	PNP		—	872C-D3CP8-D4	872C-D3CP8-P3	—
12 (0.47)	4 (0.16)	No	N.O.	PNP	2650	872C-D4NP12-E2	872C-D4NP12-D4	—	—
				NPN		—	872C-D4NN12-D4	—	—
			N.C.	PNP		—	872C-D4CP12-D4	—	—
18 (0.71)	5 (0.2)	Yes	N.O.	PNP	1950	872C-D5NP18-E2	872C-D5NP18-D4	—	—
				NPN		872C-D5NN18-E2	—	—	—
	8 (0.31)	No	N.O.	PNP	1650	872C-D8NP18-E2	872C-D8NP18-D4	—	—
30 (1.18)	10 (0.39)	Yes	N.O.	PNP	1100	—	872C-D10NP30-D4	—	—
	15 (0.59)	No		PNP	1150	—	872C-D15NP30-D4	—	—

Table 31. Short Barrel

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.		
						Cable Style	Micro QD Style	Pico QD Style
8 (0.31)	2 (0.08)	Yes	N.O.	PNP	2500	872C-DH2NP8-E2	872C-DH2NP8-D4	872C-DH2NP8-P3
12 (0.47)	4 (0.16)	No	N.O.	PNP	2650	—	872C-DH4NP12-D4	—
				NPN		—	872C-DH4NN12-D4	—
18 (0.71)	5 (0.2)	Yes	N.O.	PNP	1950	—	872C-DH5NP18-D4	—
	8 (0.31)	No		PNP	1650	—	872C-DH8NP18-D4	—
30 (1.18)	15 (0.59)	No	N.O.	PNP	1150	—	872C-DH15NP30-D4	—

21. The 2 at the end of the catalog number indicates a 2 m (6.6 ft) cable. Change to a 5 for a 5 m (16.4 ft) cable.

Product Selection — Extended Range

Table 32. Standard Barrel

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.			
						Cable Style 22 23	Micro QD Style	Pico QD Style	Pigtail Style 24
8 (0.31)	3 (0.12)	Yes	N.O.	PNP	2500	872C-M3NP8-E2	872C-M3NP8-D4	872C-M3NP8-P3	872C-M3NP8-FD02
				NPN		872C-M3NN8-E2	872C-M3NN8-D4	872C-M3NN8-P3	—
			N.C.	PNP		—	872C-M3CP8-D4	872C-M3CP8-P3	—
				NPN		872C-M3CN8-E2	872C-M3CN8-D4	872C-M3CN8-P3	—
	4 (0.16)	No	N.O.	PNP		872C-N4NP8-E2	872C-N4NP8-D4	872C-N4NP8-P3	872C-N4NP8-FD02
				NPN		872C-N4NN8-E2	872C-N4NN8-D4	872C-N4NN8-P3	—
			N.C.	PNP		872C-N4CP8-E2	872C-N4CP8-D4	872C-N4CP8-P3	—
				NPN		872C-N4CN8-E2	872C-N4CN8-D4	872C-N4CN8-P3	—
			N.O.	PNP	2550	872C-M4NP12-E2	872C-M4NP12-D4	872C-M4NP12-P3	—
				NPN		—	—	872C-M4NN12-P3	—
			N.C.	PNP		—	—	872C-M4CP12-P3	—
				NPN		—	—	872C-M4CN12-P3	—
12 (0.47)	4 (0.16)	Yes	N.O.	PNP	1650	872C-M4BP12-E2	872C-M4BP12-D4	—	872C-M4BP12-FD02
				NPN		872C-M4BN12-E2	872C-M4BN12-D4	—	872C-M4BN12-FD02
			N.C.	PNP		—	—	872C-N8NP12-P3	—
				NPN		—	—	872C-N8NN12-P3	—
			N.O./N.C.	PNP		—	—	872C-N8CP12-P3	—
				NPN		—	—	872C-N8CN12-P3	—
	8 (0.31)	No	N.O.	PNP	1650	872C-N8BP12-E2	872C-N8BP12-D4	—	872C-N8BP12-FD05
				NPN		872C-N8BN12-E2	872C-N8BN12-D4	—	872C-N8BN12-FD10
			N.C.	PNP		—	—	872C-N8CP12-P3	—
				NPN		—	—	872C-N8CN12-P3	—
			N.O./N.C.	PNP		—	—	872C-N8CP12-P3	—
				NPN		—	—	872C-N8CN12-P3	—

22. The 2 at the end of the catalog number indicates a 2 m (6.6 ft) cable. Change to a 5 for a 5 m (16.4 ft) cable or 10 for a 10 m (32.8 ft) cable. Example: Cat. No. 872C-M15BP30-E2 becomes Cat. No. 872C-M15BP30-E5.

23. The E in the catalog number indicates a PVC cable. Change to a J for a PUR cable. Example: Cat. No. 872C-MH3NP8-E2 becomes 872C-MH3NP8-J2.

24. The 02 at the end of the catalog number indicates a 0.2 m (0.066 ft) cable. Change to a 05 for a 0.5 m (1.64 ft) cable or 10 for a 1 m (3.28 ft) cable. Example: Cat. No. 872C-M15BN30-FD02 becomes Cat. No. 872C-M15BN30-FD10.

Table 32. Standard Barrel (continued)

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.			
						Cable Style 22 23	Micro QD Style	Pico QD Style	Pigtail Style 24
18 (0.71)	8 (0.31)	Yes	N.O.	PNP	1350	872C-M8NP18-E2	872C-M8NP18-D4	—	872C-M8NP18-FD02
				NPN		—	—	—	872C-M8NN18-FD02
			N.O./N.C.	PNP		872C-M8BP18-E2	872C-M8BP18-D4	—	872C-M8BP18-FD02
				NPN		872C-M8BN18-E2	872C-M8BN18-D4	—	872C-M8BN18-FD02
	12 (0.47)	No	N.O.	PNP	1300	872C-N12NP18-E2	872C-N12NP18-D4	—	872C-N12NP18-FD02
				NPN		872C-N12NN18-E2	—	—	—
			N.O./N.C.	PNP		872C-N12BP18-E2	872C-N12BP18-D4	—	872C-N12BP18-FD02
				NPN		872C-N12BN18-E2	872C-N12BN18-D4	—	872C-N12BN18-FD02
30 (1.18)	15 (0.59)	Yes	N.O.	PNP	550	872C-M15NP30-E2	872C-M15NP30-D4	—	872C-M15NP30-FD02
			N.O./N.C.	PNP		872C-M15BP30-E2	872C-M15BP30-D4	—	872C-M15BP30-FD02
				NPN		872C-M15BN30-E2	872C-M15BN30-D4	—	872C-M15BN30-FD02
	25 (0.98)	No	N.O.	PNP	400	872C-N25NP30-E2	872C-N25NP30-D4	—	—
			N.O./N.C.	PNP		872C-N25BP30-E2	872C-N25BP30-D4	—	—
				NPN		872C-N25BN30-E2	872C-N25BN30-D4	—	872C-N25BN30-FD02

22. The 2 at the end of the catalog number indicates a 2 m (6.6 ft) cable. Change to a 5 for a 5 m (16.4 ft) cable or 10 for a 10 m (32.8 ft) cable. Example: Cat. No. 872C-M15BP30-E2 becomes Cat. No. 872C-M15BP30-E5.

23. The E in the catalog number indicates a PVC cable. Change to a J for a PUR cable. Example: Cat. No. 872C-MH3NP8-E2 becomes 872C-MH3NP8-J2.

24. The 02 at the end of the catalog number indicates a 0.2 m (0.066 ft) cable. Change to a 05 for a 0.5 m (1.64 ft) cable or 10 for a 1 m (3.28 ft) cable. Example: Cat. No. 872C-M15BN30-FD02 becomes Cat. No. 872C-M15BN30-FD10.

Table 33. Short Barrel

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Config.		Switching Frequency [Hz]	Cat. No.			
						Cable Style 25 26	Micro QD Style	Pico QD Style	Pigtail Style 27
8 (0.31)	3 (0.12)	Yes	N.O.	PNP	2500	872C-MH3NP8-E2	872C-MH3NP8-D4	872C-MH3NP8-P3	872C-MH3NP8-FD02
				NPN		872C-MH3NN8-E2	872C-MH3NN8-D4	872C-MH3NN8-P3	872C-MH3NN8-FD05
			N.C.	PNP		872C-MH3CP8-E2	872C-MH3CP8-D4	872C-MH3CP8-P3	—
				NPN		872C-MH3CN8-E2	—	—	—
	4 (0.16)	No	N.O.	PNP		872C-NH4NP8-E2	872C-NH4NP8-D4	872C-NH4NP8-P3	—
				NPN		872C-NH4NN8-E2	872C-NH4NN8-D4	872C-NH4NN8-P3	—
			N.C.	PNP		872C-NH4CP8-E2	872C-NH4CP8-D4	—	—
				NPN		872C-NH4CN8-E2	—	—	—
12 (0.47)	4 (0.16)	Yes	N.O.	PNP	2550	872C-MH4NP12-E2	872C-MH4NP12-D4	872C-MH4NP12-P3	—
				NPN		—	—	872C-MH4NN12-P3	—
			N.C.	PNP		—	—	872C-MH4CP12-P3	—
				NPN		872C-MH4CN12-E2	—	872C-MH4CN12-P3	—
			N.O./N.C.	PNP		872C-MH4BP12-E2	872C-MH4BP12-D4	—	872C-MH4BP12-FD02
				NPN		872C-MH4BN12-E2	872C-MH4BN12-D4	—	—
	8 (0.31)	No	N.O.	PNP	1650	872C-NH8NP12-E2	872C-NH8NP12-D4	872C-NH8NP12-P3	872C-NH8NP12-FD02
				NPN		—	—	872C-NH8NN12-P3	—
			N.C.	PNP		—	—	872C-NH8CP12-P3	—
				NPN		—	—	872C-NH8CN12-P3	—
			N.O./N.C.	PNP		872C-NH8BP12-E2	872C-NH8BP12-D4	—	872C-NH8BP12-FD02
				NPN		872C-NH8BN12-E2	872C-NH8BN12-D4	—	—
18 (0.71)	8 (0.31)	Yes	N.O.	PNP	1350	872C-MH8NP18-E2	872C-MH8NP18-D4	—	872C-MH8NP18-FD02
				NPN		872C-MH8NN18-E2	—	—	—

25. The 2 at the end of the catalog number indicates a 2 m (6.6 ft) cable. Change to a 5 for a 5 m (16.4 ft) cable or 10 for a 10 m (32.8 ft) cable.

26. The E in the catalog number indicates a PVC cable, for a PUR cable change to a J. Example: Cat. No. 872C-MH3NP8-E2 becomes 872C-MH3NP8-J2.

27. The 02 at the end of the catalog number indicates a 0.2 m (0.066 ft) cable. Change to a 05 for a 0.5 m (1.64 ft) cable or 10 for a 1 m (3.28 ft) cable. Example: Cat. No. 872C-M15BN30-FD02 becomes Cat. No. 872C-M15BN30-FD10.

Table 33. Short Barrel (continued)

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Config.		Switching Frequency [Hz]	Cat. No.				
						Cable Style 25 26	Micro QD Style	Pico QD Style	Pigtail Style 27	
			N.O./N.C.	PNP		872C-MH8BP18-E2	872C-MH8BP18-D4	—	872C-MH8BP18-FD02	
				NPN		872C-MH8BN18-E2	872C-MH8BN18-D4	—	872C-MH8BN18-FD02	
	12 (0.47)	No	N.O.	PNP	1300	872C-NH12NP18-E2	872C-NH12NP18-D4	872C-NH12NP18-P3	872C-NH12NP18-FD02	
			N.C.	NPN		—	872C-NH12CN18-D4	—	—	
			N.O./N.C.	PNP		872C-NH12BP18-E2		—	872C-NH12BP18-FD02	
				NPN		872C-NH12BN18-E2	872C-NH12BN18-D4	—	—	
	30 (1.18)	15 (0.59)	Yes	N.O.	PNP	550	872C-MH15NP30-E2	872C-MH15NP30-D4	—	—
					NPN		—	872C-MH15NN30-D4	—	—
N.C.				PNP	—		872C-MH15CP30-D4	—	—	
N.O./N.C.				PNP	872C-MH15BP30-E2		872C-MH15BP30-D4	—	—	
				NPN	872C-MH15BN30-E2		872C-MH15BN30-D4	—	—	
25 (0.98)				No	N.O.		PNP	400	872C-NH25NP30-E2	872C-NH25NP30-D4
		N.O./N.C.	PNP		872C-NH25BP30-E2	872C-NH25BP30-D4	—		—	
NPN			872C-NH25BN30-E2	872C-NH25BN30-D4	—	—				




25. The 2 at the end of the catalog number indicates a 2 m (6.6 ft) cable. Change to a 5 for a 5 m (16.4 ft) cable or 10 for a 10 m (32.8 ft) cable.

26. The E in the catalog number indicates a PVC cable, for a PUR cable change to a J. Example: Cat. No. 872C-MH3NP8-E2 becomes 872C-MH3NP8-J2.

27. The 02 at the end of the catalog number indicates a 0.2 m (0.066 ft) cable. Change to a 05 for a 0.5 m (1.64 ft) cable or 10 for a 1 m (3.28 ft) cable. Example: Cat. No. 872C-M15BN30-FD02 becomes Cat. No. 872C-M15BN30-FD10.




Approximate Dimensions

Table 34. Standard Barrel Length

	Thread Size	Barrel Type	Smooth Diameter	Shielded	Dimensions [mm (in.)]			
					A	B (Max)	C (Min)	D (Max)
<div>Figure 96. Cable Style</div> 	—	Nickel-plated brass	6.5 28	Yes	6.5 (0.26)	33 (1.3)	—	—
	M8 x 1		—	Yes	8 (0.31)	36.8 (1.45)	30.2 (1.19)	—
				No	—	35 (1.38)		5 (0.2)
	M12 x 1	White bronze-plated brass	—	Yes	12 (0.47)	53.2 (2.09)	47 (1.85)	—
				No		63.2 (2.49)	49 (1.93)	8 (0.31)
	M18 x 1		—	Yes	18 (0.71)	50 (1.97)	47 (1.85)	—
				No		60 (2.36)		10 (0.39)
	M30 x 1.5		—	Yes	30 (1.18)	51.2 (2.02)	48.2 (1.9)	—
				No		60 (2.36)	39 (1.54)	18 (0.71)
	<div>Figure 97. Micro QD Style</div> 	M8 x 1	Nickel-plated brass	—	Yes	8 (0.31)	55 (2.16)	30 (1.18)
No					60 (2.36)		5 (0.2)	
M12 x 1		White bronze-plated brass	—	Yes	12 (0.47)	64.5 (2.54)	48.5 (1.91)	—
				No		74.5 (2.93)	50.5 (1.99)	8 (0.31)
M18 x 1			—	Yes	18 (0.71)	66 (2.6)	47 (1.85)	—
				No		76 (2.99)		10 (0.39)
M30 x 1.5			—	Yes	30 (1.18)	67.2 (2.65)	48.2 (1.9)	—
				No		76 (2.99)	39 (1.54)	18 (0.71)
<div>Figure 98. Pico QD Style</div> 	—	Nickel-plated brass	6.5 28	Yes	6.5 (0.26)	49 (1.93)	—	—
	M8 x 1		—	Yes	8 (0.31)	50 (1.97)	35 (1.38)	—
				No		55 (2.16)		5 (0.2)
	M12 x 1	White bronze-plated brass	—	Yes	12 (0.47)	63 (2.48)	47 (1.85)	—
				No		73 (2.87)	49 (1.93)	8 (0.31)


28. 6.5 mm diameter is standard only.

Table 35. Short Barrel Length

	Thread Size	Barrel Type	Shielded	Dimensions [mm (in.)]			
				A	B (Max)	C (Min)	D (Max)
Figure 99. Cable Style 	M8 x 1	Nickel-plated brass	Yes	8 (0.31)	25 (0.98)	25 (0.98)	—
			No		30(1.18)		5 (0.2)
	M12 x 1	White bronze-plated brass	Yes	12 (0.47)	38.2 (1.5)	32 (1.26)	—
			No		43.2 (1.7)		29 (1.14)
	M18 x 1		Yes	18 (0.71)	35 (1.38)	32 (1.26)	—
			No		45 (1.77)		10 (0.39)
	M30 x 1.5		Yes	30 (1.18)	36.2 (1.43)	33.2 (1.31)	—
			No		45 (1.77)		24 (0.94)
Figure 100. Micro QD Style 	M8 x 1	Nickel-plated brass	Yes	8 (0.31)	45 (1.77)	20 (0.79)	—
			No		50 (1.97)		5 (0.2)
	M12 x 1	White bronze-plated brass	Yes	12 (0.47)	44.5 (1.75)	28.5 (1.12)	—
			No		54.5 (2.15)		30.5 (1.2)
	M18 x 1		Yes	18 (0.71)	46 (1.81)	27 (1.06)	—
			No		56 (2.2)		10 (0.39)
	M30 x 1.5		Yes	30 (1.18)	47.2 (1.86)	28.2 (1.11)	—
			No		61 (2.4)		24 (0.94)
Figure 101. Pico QD Style 	M8 x 1	Nickel-plated brass	Yes	8 (0.31)	45 (1.77)	30 (1.18)	—
			No		50 (1.97)		5 (0.2)
	M12 x 1	White bronze-plated brass	Yes	12 (0.47)	43 (1.69)	27 (1.06)	—
			No		53 (2.09)		29 (1.14)

Wiring Diagrams

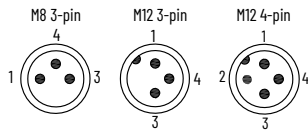Figure 102. 8 mm, 12 mm, 18 mm, and 30 mm Pinouts



- 1 BN (brown)
- 2 WH (white)
- 3 BU (blue)
- 4 BK (black)

Figure 103. 8 mm, 12 mm, 18 mm, and 30 mm 3-wire DC Wiring

NPN/PNP	Cable	M12 Micro Connector	M8 Pico Connector
NPN N.O.			
NPN N.C.			
PNP N.O.			
PNP N.C.			

Figure 104. 12 mm, 18 mm, and 30 mm 4-wire DC Complementary Wiring

NPN/PNP	Cable	M12 Micro Connector	M8 Pico Connector
NPN N.O. + N.C. Complementary			
PNP N.O. + N.C. Complementary			

872C WorldProx 2-wire AC Sensors

 <p>AC Cable Style 8 mm</p>	 <p>AC Cable Style 12 mm, 18 mm, 30 mm</p>	 <p>Mini Quick Disconnect Style 18 mm, 30 mm</p>	 <p>AC Micro Quick Disconnect Style 12 mm, 18 mm, 30 mm</p>
--	---	--	--

Specifications

Attribute	8 mm	12 mm, 18 mm, and 30 mm
Load current	100 mA, max	≤ 300 mA
Minimum Load current	5 mA	
Inrush current (1 cycle)	≤ 2 A	
Leakage current	≤ 2 mA	
Operating voltage	20...240V AC	20...250V AC
Voltage drop	≤ 5V	
Repeatability	≤ 5%	
Hysteresis	15%	≤ 15% typical
Protection type	False pulse, transient noise, and overload	
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13 IP67 (IEC 529) Nickel-plated brass barrel	
Housing material	Threaded nickel-plated brass barrel and plastic face	
Connections	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) length 3-conductor PVCQuick disconnect: 3-pin micro style, 3-pin mini style	
Status indicator	Red: Output energized, 360° visibility	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock	30 g, 11 ms	
Vibration	55 Hz, 1 mm amplitude, 3 planes	

Correction Factors


Target Material	Correction Factor
Steel	1.0
Stainless steel	0.9
Brass	0.5
Aluminum	0.45
Copper	0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.		
					Cable Style	Mini QD Style	Micro QD Style
8 (0.31)	1.5 (0.06)	Yes	N.O.	25	872C-A1N8-A2	—	—
			N.C.		872C-A1C8-A2	—	—
	2 (0.08)	No	N.O.		872C-A2N8-A2	—	—
			N.C.		872C-A2C8-A2	—	—
12 (0.47)	2 (0.08)	Yes	N.O.	15	872C-A2N12-A2	—	872C-A2N12-R3
			N.C.		872C-A2C12-A2	—	872C-A2C12-R3
	4 (0.16)	No	N.O.		872C-A4N12-A2	—	872C-A4N12-R3
			N.C.		872C-A4C12-A2	—	872C-A4C12-R3
18 (0.71)	5 (0.2)	Yes	N.O.	15	872C-A5N18-A2	872C-A5N18-N3	872C-A5N18-R3
			N.C.		872C-A5C18-A2	872C-A5C18-N3	872C-A5C18-R3
	10 (0.39)	No	N.O.		872C-A10N18-A2	872C-A10N18-N3	872C-A10N18-R3
			N.C.		872C-A10C18-A2	872C-A10C18-N3	872C-A10C18-R3
30 (1.18)	10 (0.39)	Yes	N.O.	15	872C-A10N30-A2	872C-A10N30-N3	872C-A10N30-R3
			N.C.		872C-A10C30-A2	872C-A10C30-N3	872C-A10C30-R3
	15 (0.59)	No	N.O.		872C-A15N30-A2	872C-A15N30-N3	872C-A15N30-R3
			N.C.		872C-A15C30-A2	872C-A15C30-N3	872C-A15C30-R3
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F	889R-F3ECA-2


Approximate Dimensions

Figure 105. Cable Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M8 x 1	Yes	8 (0.32)	47 (1.85)	36 (1.42)	—
	No	6 (0.24)	47 (1.85)	36 (1.42)	6 (0.24)
M12 x 1	Yes	12 (0.47)	70 (2.76)	60 (2.36)	—
	No			54 (2.13)	6 (0.24)
M18 x 1	Yes	18 (0.71)	60 (2.36)	50 (1.96)	—
	No			42 (1.65)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	60 (2.36)	50 (1.96)	—
	No			38 (1.5)	12 (0.47)

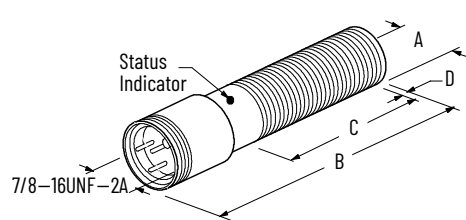Figure 106. Mini QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M18 x 1	Yes	18 (0.71)	91 (3.58)	52 (2.05)	—
	No			44 (1.73)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	91 (3.58)	52 (2.25)	—
	No			40 (1.57)	12 (0.47)

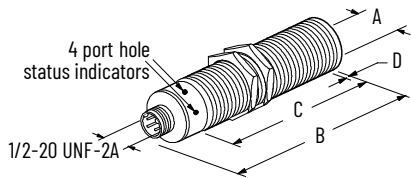Figure 107. Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	75 (2.95)	45 (1.77)	—
	No			40 (1.57)	6 (0.24)
M18 x 1	Yes	18 (0.71)	80 (3.15)	60 (2.36)	—
	No			52 (2.05)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	80 (3.15)	50 (1.96)	—
	No			38 (1.5)	12 (0.47)

Wiring Diagrams

Table 36. Cable Style

Normally Open (N.O.)	Normally Closed (N.C.)

IMPORTANT: Load can be switched to brown wire.


Table 37. Mini QD Style

Normally Open (N.O.) or Normally Closed (N.C.)

IMPORTANT: Load can be switched to Pin 3.

Table 38. Micro QD Style

Normally Open (N.O) or Normally Closed (N.C.)



IMPORTANT: Load can be switched to Pin 2.

872C WorldProx 2-wire AC Extended Sensing Sensors



AC Cable Style
12 mm, 18 mm, 30 mm



Mini Quick Disconnect Style
18 mm, 30 mm



AC Micro Quick Disconnect Style
12 mm, 18 mm, 30 mm

Specifications

Attribute	12 mm, 18 mm, and 30 mm
Load current	≤ 300 mA
Load current, min	2 mA
Inrush current (1 cycle)	≤ 2 A
Leakage current	≤ 1.7 mA
Operating voltage	20...250V AC
Voltage drop	≤ 11V at 10 mA, ≤ 7V at 300 mA
Repeatability	≤ 5%
Hysteresis	≤ 10% typical
Protection type	False pulse, transient noise, and overload
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13 IP67 (IEC 529) Nickel-plated brass barrel
Housing material	Threaded nickel-plated brass barrel and plastic face
Connections	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) length 3-conductor PVCQuick disconnect: 3-pin micro style, 3-pin mini style
LED (light-emitting diode)	Red: Output energized, 360° visibility
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g, 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors


Target Material	Correction Factor
Steel	1.0
Stainless steel	0.9
Brass	0.5
Aluminum	0.45
Copper	0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.		
					Cable Style	Mini QD Style	Micro QD Style
12 (0.47)	4 (0.16)	Yes	N.O.	20	872C-F4N12-A2	—	872C-F4N12-R3
			N.C.		872C-F4C12-A2	—	872C-F4C12-R3
	8 (0.31)	No	N.O.		872C-G8N12-A2	—	872C-G8N12-R3
			N.C.		872C-G8C12-A2	—	872C-G8C12-R3
18 (0.71)	8 (0.31)	Yes	N.O.		872C-F8N18-A2	872C-F8N18-N3	872C-F8N18-R3
			N.C.		872C-F8C18-A2	872C-F8C18-N3	872C-F8C18-R3
	12 (0.47)	No	N.O.		872C-G12N18-A2	872C-G12N18-N3	872C-G12N18-R3
			N.C.		872C-G12C18-A2	872C-G12C18-N3	872C-G12C18-R3
30 (1.18)	15 (0.59)	Yes	N.O.		872C-F15N30-A2	872C-F15N30-N3	872C-F15N30-R3
			N.C.		872C-F15C30-A2	872C-F15C30-N3	872C-F15C30-R3
	30 (1.18)	No	N.O.		872C-G30N30-A2	872C-G30N30-N3	872C-G30N30-R3
			N.C.		872C-G30C30-A2	872C-G30C30-N3	872C-G30C30-R3
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F	889R-F3ECA-2


Approximate Dimensions

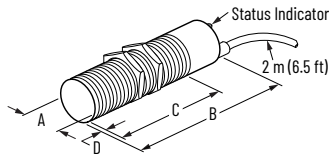Figure 108. Cable Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	70 (2.76)	60 (2.36)	—
	No			54 (2.13)	6 (0.24)
M18 x 1	Yes	18 (0.71)	60 (2.36)	50 (1.96)	—
	No			42 (1.65)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	60 (2.36)	50 (1.96)	—
	No			38 (1.5)	12 (0.47)

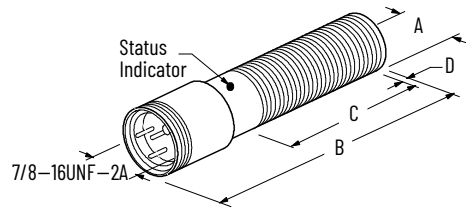Figure 109. Mini QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M18 x 1	Yes	18 (0.71)	91 (3.58)	52 (2.05)	—
	No			44 (1.73)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	91 (3.58)	52 (2.25)	—
	No			40 (1.57)	12 (0.47)

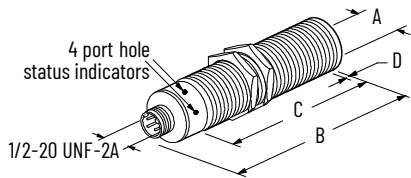Figure 110. Micro QD Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	75 (2.95)	45 (1.77)	—
	No			40 (1.57)	6 (0.24)
M18 x 1	Yes	18 (0.71)	80 (3.15)	60 (2.36)	—
	No			52 (2.05)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	80 (3.15)	50 (1.96)	—
	No			38 (1.5)	12 (0.47)

Wiring Diagrams

Table 39. Cable Style

Normally Open (N.O)	Normally Closed (N.C.)

IMPORTANT: Load can be switched to brown wire.


Table 40. Mini QD Style

Normally Open (N.O) or Normally Closed (N.C.)

IMPORTANT: Load can be switched to Pin 3.

Table 41. Micro QD Style

Normally Open (N.O) or Normally Closed (N.C.)



IMPORTANT: Load can be switched to Pin 2.

872C WorldProx 2-wire AC/DC Sensors



AC Cable Style
12 mm, 18 mm, 30 mm



AC Micro Quick Disconnect Style
12 mm, 18 mm, 30 mm

Specifications

Attribute	12 mm	18 mm and 30 mm
Load current	300 mA	350 mA
Minimum Load current	2 mA	
Inrush current (1 cycle)	≤ 2 A	
Leakage current	≤ 1.7 mA at 120V and ≤ 1.9 mA at 250V	
Operating voltage	20...250V AC/DC	
Voltage drop	≤ 5V	
Repeatability	≤ 5%	
Hysteresis	≤ 10% typical	
Protection type	False pulse, transient noise, short circuit, and overload	
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13 IP67 (IEC 529) Nickel-plated brass barrel	
Housing material	Threaded nickel-plated brass barrel and plastic face	
Connections	Cable: 2 m (6.5 ft) length 3-conductor PVC Quick disconnect: 3-pin micro style	
Status indicator	Red: Output energized, 360° visibility	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock and Vibration	30 g, 10...55 Hz	

Correction Factors


Target Material	Correction Factor
Steel	1.0
Stainless steel	0.9
Brass	0.5
Aluminum	0.4
Copper	0.4

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.	
					Cable Style	Micro QD Style
12 (0.47)	2 (0.08)	Yes	N.O.	30	872C-J2N12-A2	872C-J2N12-R3
	4 (0.16)	No			872C-K4N12-A2	872C-K4N12-R3
18 (0.71)	5 (0.2)	Yes			872C-J5N18-A2	872C-J5N18-R3
	8 (0.32)	No			872C-K8N18-A2	872C-K8N18-R3
30 (1.18)	10 (0.39)	Yes			872C-J10N30-A2	872C-J10N30-R3
	15 (0.59)	No			872C-K15N30-A2	872C-K15N30-R3
Recommended standard QD cordset: -2 = 2 m (6.5 ft)						889R-F3ECA-2


Approximate Dimensions

Figure 111. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	70 (2.76)	60 (2.36)	—
	No			54 (2.13)	6 (0.24)
M18 x 1	Yes	18 (0.71)	60 (2.36)	50 (1.96)	—
	No			42 (1.65)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	60 (2.36)	50 (1.96)	—
	No			38 (1.5)	12 (0.47)

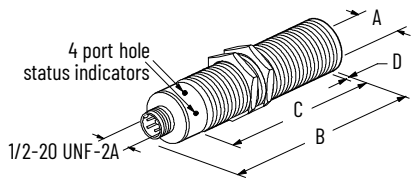Figure 112. Micro QD Style




Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B	C	D
M12 x 1	Yes	12 (0.47)	75 (2.95)	45 (1.77)	—
	No			40 (1.57)	6 (0.24)
M18 x 1	Yes	18 (0.71)	80 (3.15)	60 (2.36)	—
	No			52 (2.05)	8 (0.31)
M30 x 1.5	Yes	30 (1.18)	80 (3.15)	50 (1.96)	—
	No			38 (1.5)	12 (0.47)

Wiring Diagrams

Table 42. Cable Style


Normally Open (N.O)



IMPORTANT: Load can be switched to brown wire.

Table 43. Micro QD Style

Normally Open (N.O) or Normally Closed (N.C.)



IMPORTANT: Load can be switched to Pin 2.

872C WorldProx 2-wire AC/DC Relay Output Sensors



Cable Style
30 mm

Specifications

Attribute	30 mm
Load current	Switched power, max: 84 W or 900V A Switched current, max: 3 A SPDT Switched voltage, max: 28V DC or 300V AC Relay life: 20,000,000 operations (no load), 100,000 operations (full load)
Operating voltage	30...132V AC/DC
Repeatability	≤ 10% at constant temperature
Hysteresis	10% typical
Protection type	False pulse, transient noise, and reverse polarity
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 3R 4, 4X, 6, 6P, 12, 13, IP67 (IEC 529); Nickel-plated brass barrel
Housing material	Threaded nickel-plated brass barrel
Connections	Cable: 2 m (6.5 ft) length 5-conductor 22 AWG PVC cable
Status indicator	Red: Output energized, 360° visibility
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g, 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors


Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
30 mm	10 (0.39)	Yes	SPDT Relay	100	872C-B10BR30-E2
	15 (0.59)	No			872C-B15BR30-E2

Approximate Dimensions

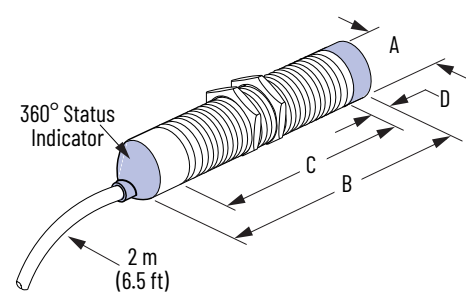
Figure 113. Cable Style



Thread Size	Shielded	Dimensions [mm (in.)]			
		A	B (Max)	C (Min)	D (Max)
M30 x 1.5	Yes	30 (1.18)	61 (2.4)	57 (2.24)	—
	No		73 (2.87)		12.2 (0.48)


Wiring Diagrams

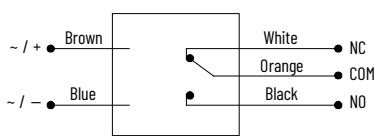Figure 114. Cable Style



Torque Charts

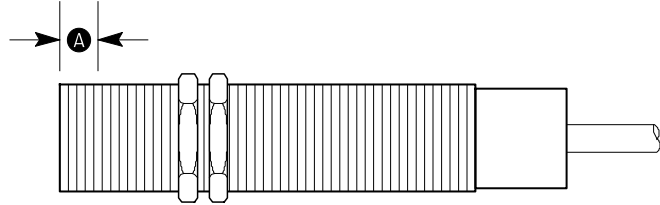871C/872C Tubular Sensors



Diameter	Shielded	Length A			Remainder of Thread Length	
		[mm (in.)]	Torque [N•m (lb•in)] 29	Turns	Torque [N•m (lb•in)] 29	Turns
8 mm	Yes	4.6 (0.18)	1.7 (15)	1-1/2	2.8 (25)	1-1/2
12 mm	Yes	11.7 (0.46)	4 (35)	1/4	9.6 (85)	1/2
	No	5.6 (0.22)				
18 mm	Yes	13.7 (0.54)	11.3 (100)	1/3	19.8 (175)	1/2
	No	5.6 (0.22)				
30 mm	Yes/No	—	33.9 (300)	1/8	33.9 (300)	1/8

871T Tubular Sensors

Diameter	Shielded	Length A			Remainder of Thread Length	
		[mm (in.)]	Torque [N•m (lb•in)] 30	Turns	Torque [N•m (lb•in)] 30	Turns
12 mm	Yes	11.7 (0.46)	9 (80)	2/3	14.1 (125)	3/4
	No	5.6 (0.22)				
18 mm	Yes	13.7 (0.54)	19.8 (175)	1/2	28.3 (250)	2/3
	No	5.6 (0.22)				

29. For metal housing with the use of supplied hardware.

30. For metal housing with the use of supplied hardware.

871TM Tubular Sensors

Diameter	Shielded	Torque [N•m (lb•in)] 31	Turns
12 mm	Yes	14.1 (125)	3/4
	No		
18 mm	Yes	28.3 (250)	2/3
	No		
30 mm	Yes	33.9 (300)	1/8
	No		

871Z Tubular Sensors

Diameter	Shielded	Torque [N•m (lb•in)] 32	Turns
12 mm	Yes	9.6 (85)	1/2
	No		
18 mm	Yes	19.8 (175)	1/2
	No		
30 mm	Yes	33.9 (300)	1/8
	No		

31. For metal housing with the use of supplied hardware.
32. For metal housing with the use of supplied hardware.

Rectangular Sensors

802PR 2-wire AC, High-output Rectangular Sensors

		
802PR AC Conduit Style	802PR AC Cable Style	802PR Mini QD Style

Specifications

Attribute	802PR Top Sensing and Side-sensing Limit Switch Style
Load current	≤ 1 A at 40 °C (104 °F) linearly de-rated to 0.5 A at 75 °C (167 °F)
Inrush current	≤ 10 A/1 s
Current consumption	25 mA, min
Leakage current	≤ 3.5 mA (60...132V AC); ≤ 6.5 mA (102...132V AC)
Operating voltage	60...132V AC or 102...132V AC
Voltage drop	≤ 8.5V
Repeatability	≤ 0.025 mm
Hysteresis	15%, max
Protection type	False pulse, transient noise
Certifications	UL Listed, CSA Certified, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 4X, 12, 13, IP65 (IEC529)
Housing material	Self-extinguishing glass-reinforced polyester body
Connection type	<ul style="list-style-type: none">• Cable: 2.4 m (8 ft) or 3.7 m (12 ft) length, 2-conductor 16 AWG ST0 (oil-resistant thermoplastic)• Quick disconnect: 3-pin mini• Conduit opening or conduit coupler: 1/2...14 NPT internal thread with screw terminals (use 18...14 AWG wire)
Status indicator	Red: Output energized
Operating temperature	-25...+75 °C (-13...+167 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.8...0.85
Brass	0.5...0.55
Aluminum	0.45...0.5
Copper	0.4...0.45

Product Selection

Table 44. Cable Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Voltage Range	Output Configuration	Corrosion-resistant	Switching Frequency [Hz]	Cable Length [m (ft.)]	Cat. No.
Side	13 (0.51)	Yes	60...132V AC	Selectable (factory preset to N.O.)	No	20	2.5 (8)	802PR-LABM2-08
							3.6 (12)	802PR-LABM2-12
Top							2.5 (8)	802PR-LABR2-08
							3.6 (12)	802PR-LABR2-12
Side				Selectable (factory preset to N.C.)			2.5 (8)	802PR-LACM2-08
							3.6 (12)	802PR-LACM2-12
Top							2.5 (8)	802PR-LACR2-08
							3.6 (12)	802PR-LACR2-12
Side			102...132V AC	N.O.	No	16	2.5 (8)	802PR-LAAM1-08
							3.6 (12)	802PR-LAAM1-12
Top							2.5 (8)	802PR-LAAR1-08
							3.6 (12)	802PR-LAAR1-12
Side					Yes		2.5 (8)	802PR-XAAM1-08
							3.6 (12)	802PR-XAAM1-12
Top							2.5 (8)	802PR-XAAR1-08
							3.6 (12)	802PR-XAAR1-12

Table 45. Mini QD Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Voltage Range	Output Configuration	Switching Frequency [Hz]	Cat. No.
Side	13 (0.51)	Yes	60...132V AC	Selectable (factory preset to N.O.)	20	802PR-LABE2
Top						802PR-LABK2
Side				Selectable (factory preset to N.C.)		802PR-LACE2
Top						802PR-LACK2
Side			102...132V AC	N.O.	16	802PR-LAAE1
Top						802PR-LAAK1
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F

Table 46. Conduit Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Voltage Range	Output Configuration	Corrosion-resistant	Switching Frequency [Hz]	Connection	Cat. No.		
Side	13 (0.51)	Yes	60...132V AC	Selectable (factory preset to N.O.)	No	20	Conduit coupler	802PR-LABA2		
							Threaded 1/2-14 NPT 33	802PR-LABB2		
Top							Conduit coupler	802PR-LABJ2		
							Threaded 1/2-14 NPT 33	802PR-LABH2		
Side				Selectable (factory preset to N.C.)			Conduit coupler	802PR-LACA2		
							Threaded 1/2-14 NPT 33	802PR-LACB2		
Top							Conduit coupler	802PR-LACJ2		
							Threaded 1/2-14 NPT 33	802PR-LACH2		
Side			102...132V AC	N.O.	No	16	Conduit coupler	802PR-LAAA1		
							Threaded 1/2-14 NPT 33	802PR-LAAB1		
Top							Conduit coupler	802PR-LAAJ1		
							Threaded 1/2-14 NPT 33	802PR-LAAH1		
Side					Yes			Threaded 1/2-14 NPT 33	802PR-XAAB1	
Top									802PR-XAAH1	

33. To order ISO 20-1.5, add S6 to the end of the catalog number. Example: Cat. No. 802PR-LABB2 becomes Cat. No. 802PR-LABB2-S6.


Approximate Dimensions

Dimensions in mm (in.) unless otherwise noted.

IMPORTANT:

- Side sensing model heads can be turned in 90° increments to accommodate four side-sensing positions.
- Low voltage models have two status indicators.

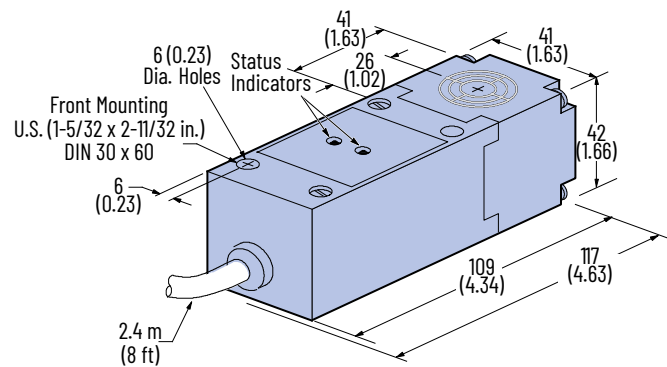Table 47. Cable Style





<p>60 (2.34)</p> <p>30 (1.16)</p>	<p>59.5 (2.34)</p> <p>29.4 (1.16)</p>
Front Mounting Hole Pattern Front View Two Holes for #10 or M5 Screws	Rear Mounting Hole Pattern Front View Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)


IMPORTANT:

- Side sensing model heads can be turned in 90° increments to accommodate four side-sensing positions.
- Low voltage models have two status indicators.

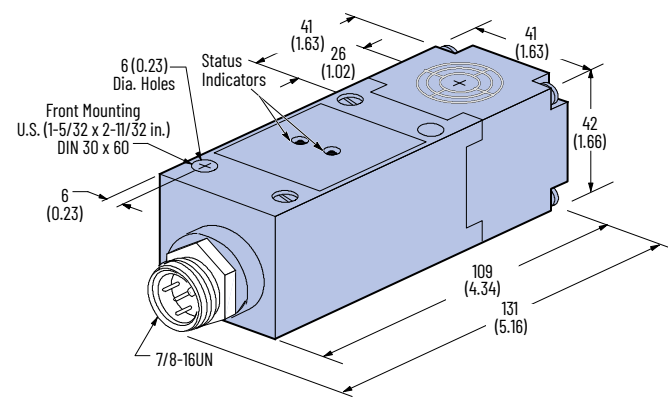Table 48. Mini QD Style



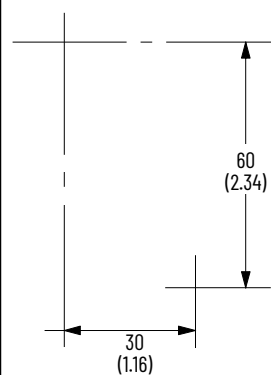Front Mounting Hole Pattern Front View
Two Holes for #10 or M5 Screws




Rear Mounting Hole Pattern Front View
Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)



IMPORTANT:

- Side sensing model heads can be turned in 90° increments to accommodate four side-sensing positions.
- Low voltage models have two status indicators.

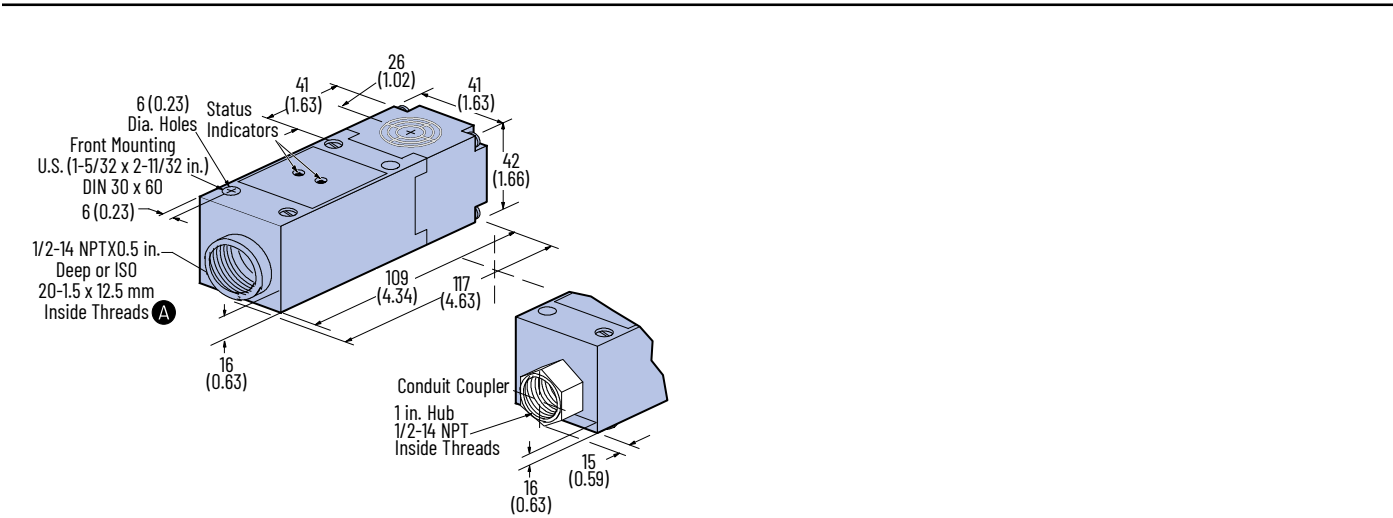Table 49. Conduit Style





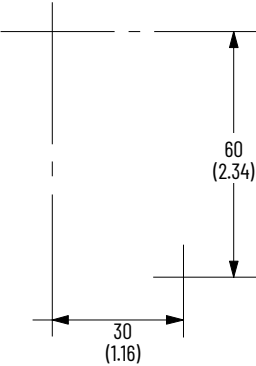(A) For ISO 20-1.5 x 12.5 mm inside threads, add -S6 to the catalog number. Example: Cat. No. 802PR-LABB2 becomes Cat. No. 802PR-LABB2-S6.

 <p>Front Mounting Hole Pattern Front View</p> <p>Two Holes for #10 or M5 Screws</p>	 <p>Rear Mounting Hole Pattern Front View</p> <p>Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)</p>
--	---

Wiring Diagrams


Table 50. Cable Style

Normally Open (N.O.)	Normally Closed (N.C.)
	

IMPORTANT: Load can be switched to white lead.

Table 51. Mini QD Style


Normally Open (N.O) or Normally Closed (N.C.)




IMPORTANT: Load can be switched to Pin 3.

Table 52. Conduit Style

Normally Open (N.O)



Normally Closed (N.C.)



IMPORTANT: Load can be switched to Terminal 1.

802PR 2-wire AC Hazardous Location, High-output Rectangular Sensors



802PR 2-wire AC Hazardous Location Conduit Style

Specifications

Attribute	802PR Top Sensing and Side-sensing Limit Switch Style
Load current	≤ 1 A at 40 °C (104 °F) linearly derated to 0.5 A at 75 °C (167 °F)
Inrush current	≤ 10 A/1 s
Current consumption	25 mA, min
Leakage current	≤ 6.5 mA
Operating voltage	102...132V AC
Voltage drop	≤ 8.5V
Repeatability	≤ 0.025 mm
Hysteresis	15%, max
Protection type	False pulse, transient noise
Certifications	UL Listed and CSA Certified
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13; IP65 (IEC529) Division 2 Class I: Groups A, B, C, and D; Class II: Groups F and G; Class III: All groups
Housing material	Self-extinguishing glass-reinforced polyester body
Connection type	Conduit coupler: 1/2-14NPT internal thread with screw terminals (use 18...14 AWG wire)
Status indicator	Red: Output energized
Operating temperature	-25...+75 °C (-13...+167 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.8...0.85
Brass	0.5...0.55
Aluminum	0.45...0.5
Copper	0.4...0.45

Product Selection

Table 53. Conduit Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
Side	13 (0.51)	Yes	N.O.	16	802PR-LAAA3
Top					802PR-LAAJ3

Approximate Dimensions

Dimensions in mm (in.).

IMPORTANT: Side sensing model heads can be turned in 90° increments to accommodate four side-sensing positions.

Table 54. Conduit Style

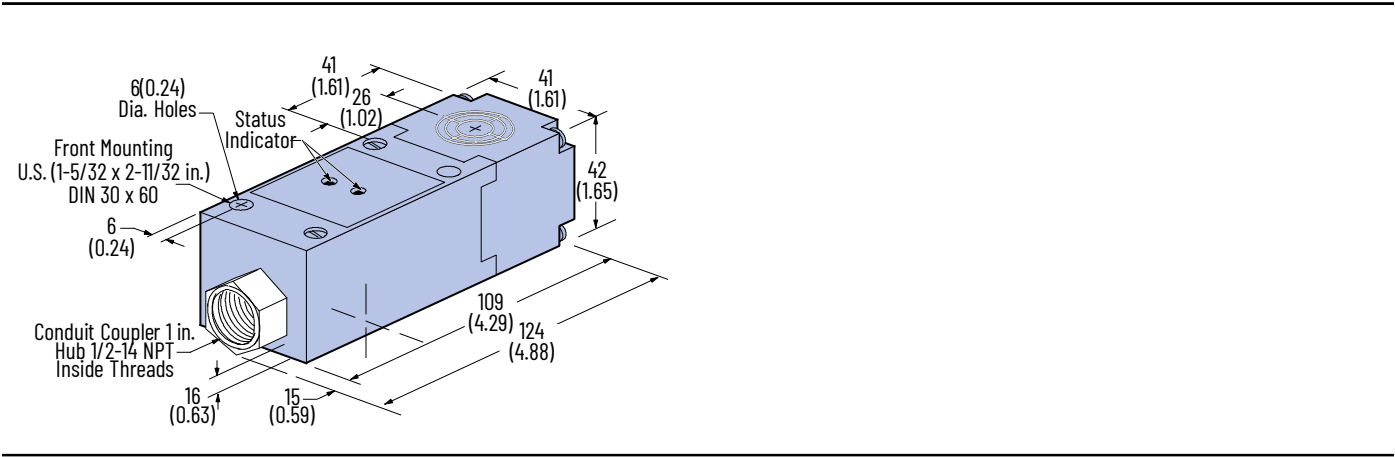




Table 54. Conduit Style (continued)

 <p>Front Mounting Hole Pattern Front View</p> <p>Two Holes for #10 or M5 Screws</p>	 <p>Rear Mounting Hole Pattern Front View</p> <p>Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)</p>
---	--

IMPORTANT: The sensor output is designed and approved as Intrinsically Safe for use in Division 1, 2; Class I, II, III; Groups A, B, C, D, E, F, G hazardous location areas when used with a Cat. No. 937ZH-DPBN-1 or 937ZH-DPDP-2 Intrinsically Safe Zener Barrier. Installation must be in accordance with the National Electrical Code, ANSI/ISA RP12.6, or per other regulations by the authority having jurisdiction over the installation site as appropriate.

802PR 2-wire AC/DC Rectangular Sensors

			
802PR AC/DC Cable Style	802PR AC Micro Quick Disconnect Style	802PR AC/DC Mini Quick Disconnect Style	802PR AC/DC Conduit Style

Specifications

Attribute	802PR Top Sensing and Side-sensing Limit Switch Style
Load current	AC 4...25 mA; DC 2...25 mA
Leakage current	≤ 1.7 mA at 132V, ≤ 2.5 mA at 250V
Operating voltage	20...250V AC/DC
Voltage drop	≤ 10V
Repeatability	≤ 10% typical
Hysteresis	≤ 10% typical
Protection type	Transient noise, short circuit, overload, false pulse, radio frequency (10V per meter; frequency range 20...1000 MHz)
Certifications	UL Listed, CSA Certified, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 4X, 12, 13, IP65 (IEC529)
Housing material	Self-extinguishing glass-reinforced polyester body
Connection type	<ul style="list-style-type: none">Cable: 2.4 m (8 ft) length, 2-conductor ToughLink™Quick disconnect: 3-pin micro style, 3-pin mini styleConduit opening or conduit coupler: Internal thread with screw terminals (use 18...14 AWG wire)
Status indicator	<ul style="list-style-type: none">Green: PowerRed: Output energized (both on in SCP/overload)
Operating temperature	-25...+75 °C (-13...+167 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.9
Brass	0.8
Aluminum	0.75
Copper	0.7

Product Selection

Table 55. Cable Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cable Length [m (ft)]	Corrosion-resistant	Cat. No.
Side	17 (0.67)	Yes	N.O.	20	2.5 (8)	Yes	802PR-XBAM1-08
						No	802PR-LBAM1-08
					3.6 (12)	Yes	802PR-XBAM1-12
						No	802PR-LBAM1-12
Top	17 (0.67)	Yes	N.O.	20	2.5 (8)	Yes	802PR-XBAR1-08
						No	802PR-LBAR1-08
					3.6 (12)	Yes	802PR-XBAR1-12
						No	802PR-LBAR1-12

Table 56. Mini QD Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
Side	17 (0.67)	Yes	N.O.	20	802PR-LBAE1
Top					802PR-LBAK1
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)					889N-F3AFC-6F

Table 57. Micro QD Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
Side	17 (0.67)	Yes	N.O.	20	802PR-LBAC1
Top					802PR-LBAF1
Recommended cordset: 2 m (6.5 ft) 3-pin AC micro					889R-F3ECA-2


Table 58. Conduit Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Corrosion-resistant	Connection	Cat. No.
Side	17 (0.67)	Yes	N.O.	20	Yes	Threaded 1/2-14 NPT 34	802PR-XBAB1
					No		802PR-LBAB1
					No	Conduit coupler	802PR-LBAA1
Top	17 (0.67)	Yes	N.O.	20	Yes	Threaded 1/2-14 NPT 34	802PR-XBAH1
					No		802PR-LBAH1
					No	Conduit coupler	802PR-LBAJ1

Approximate Dimensions

IMPORTANT: Side sensing model heads can be turned in 90° increments to accommodate four side-sensing positions.

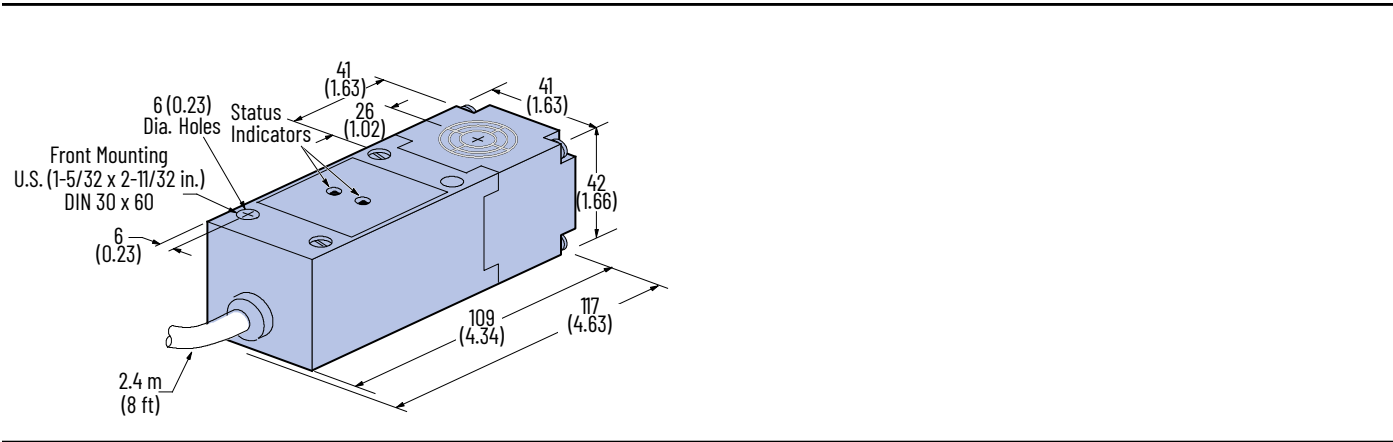Table 59. Cable Style



34. To order ISO 20-1.5, add S6 to the end of the catalog number. Example: Cat. No. 802PR-LABB2 becomes Cat. No. 802PR-LABB2-S6.

Table 59. Cable Style (continued)


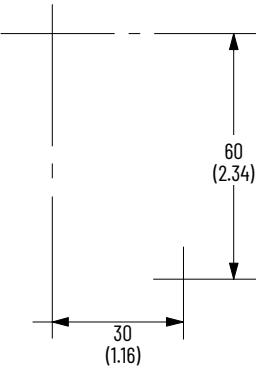
 <p>Front Mounting Hole Pattern Front View</p> <p>Two Holes for #10 or M5 Screws</p>	 <p>Rear Mounting Hole Pattern Front View</p> <p>Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)</p>
---	--

Table 60. Mini QD Style



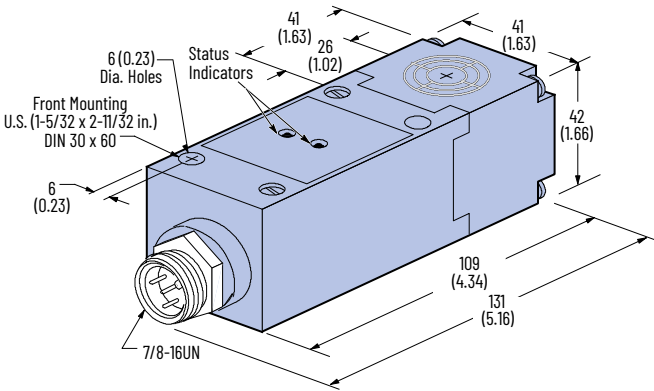

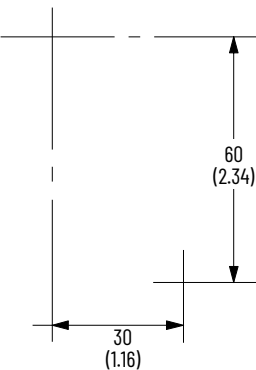
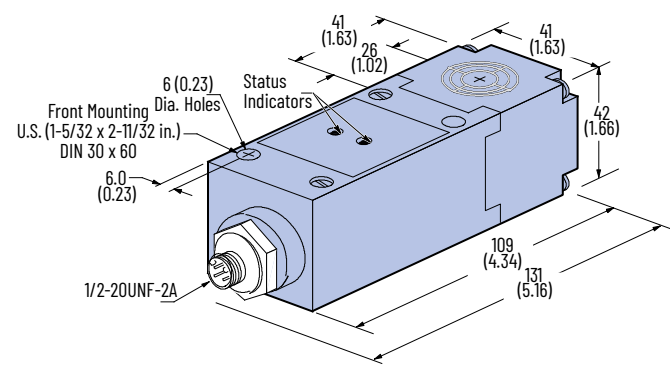
	
 <p>Front Mounting Hole Pattern Front View</p> <p>Two Holes for #10 or M5 Screws</p>	 <p>Rear Mounting Hole Pattern Front View</p> <p>Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)</p>

Table 61. Micro QD Style




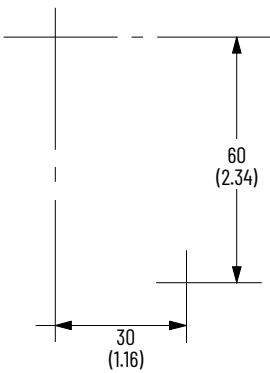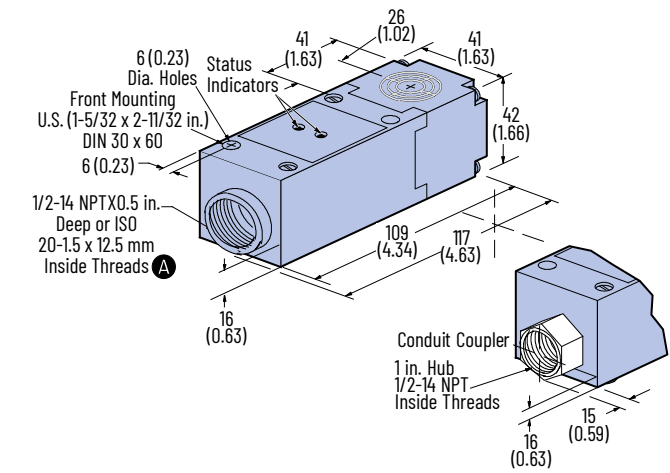Front Mounting Hole Pattern Front View
Two Holes for #10 or M5 Screws





Rear Mounting Hole Pattern Front View
Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)

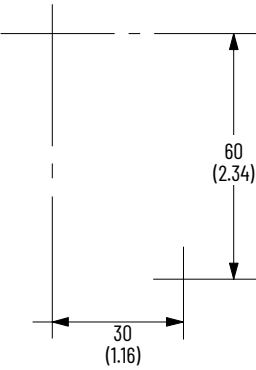Table 62. Conduit Style



(A) For ISO 20-1.5 x 12.5 mm inside threads, add -S6 to the catalog number. Example: Cat. No. 802PR-LABB2 becomes Cat. No. 802PR-LABB2-S6.

Table 62. Conduit Style (continued)

 <p>Front Mounting Hole Pattern Front View</p> <p>Two Holes for #10 or M5 Screws</p>	 <p>Rear Mounting Hole Pattern Front View</p> <p>Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)</p>
---	--

Wiring Diagrams

Table 63. Cable Style


<p>Normally Open (N.O)</p>

<p>IMPORTANT: Load can be switched to white lead.</p>

Table 64. Mini QD Style



<p>Normally Open (N.O)</p>

<p>IMPORTANT: Load can be switched to Pin 3.</p>


Table 65. Micro QD Style

Normally Open (N.O)



IMPORTANT: Load can be switched to Pin 2.

Figure 115. Conduit Style



IMPORTANT: Load can be switched to Terminal 1.

802PR 2-wire AC/DC Hazardous Location Rectangular Sensors



802PR AC Conduit Style

Specifications

Attribute	802PR Top Sensing and Side-sensing Limit Switch Style
Load current	AC: 4...25 mA, DC: 2...25 mA
Leakage current	≤ 1.7 mA at 132V, ≤ 2.5 mA at 250V
Operating voltage	20...250V AC/DC
Voltage drop	≤ 10V
Repeatability	≤ 10% typical
Hysteresis	≤ 10% typical
Protection type	Transient noise, short circuit, overload, false pulse, radio frequency (≤ 10V per meter; frequency range 20...1000 MHz)
Certifications	UL Listed and CSA Certified
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13; IP65 (IEC529); Division 2 Class I: Groups A, B, C, and D; Class II: Groups F and G; Class III: All groups
Housing material	Self-extinguishing glass-reinforced polyester body
Connection type	Conduit Coupler: 1/2 - 14 NPT internal thread with screw terminals, use 18...14 AWG wire
Status indicator	<ul style="list-style-type: none">Green: PowerRed: Output energized (both on in SCP/overload)
Operating temperature	-25...+75 °C (-13...+167 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.9
Brass	0.8
Aluminum	0.75
Copper	0.7

Product Selection


Table 66. Conduit Style

Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
Side	17 (0.67)	Yes	N.O.	20	802PR-LBAA3
Top					802PR-LBAJ3

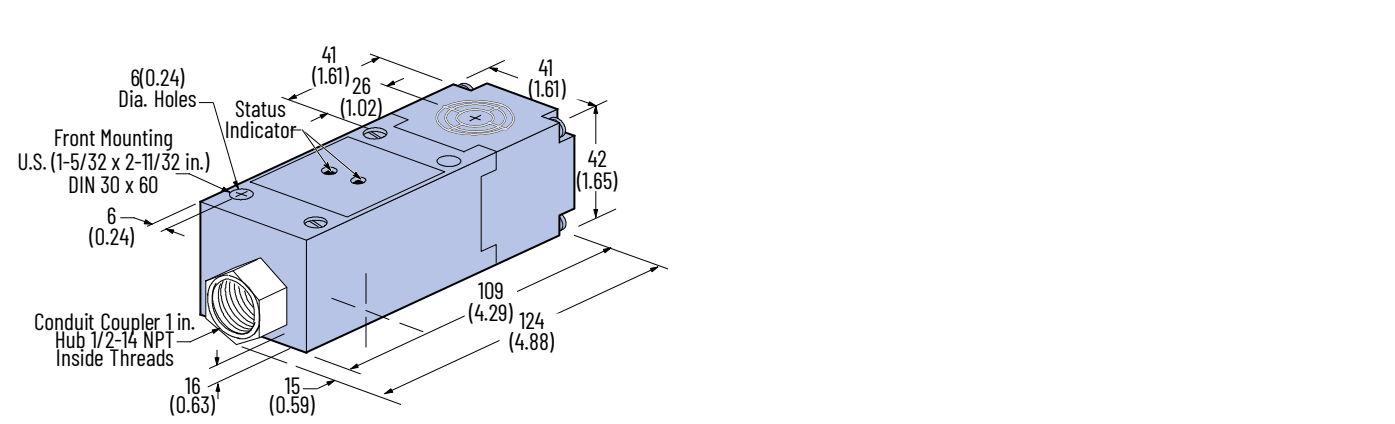Approximate Dimensions



IMPORTANT: Side sensing model heads can be turned in 90° increments to accommodate four side-sensing positions.

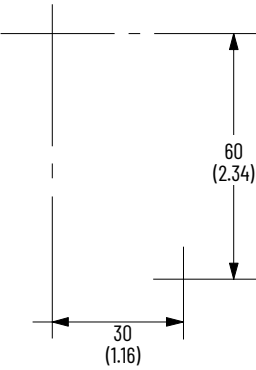Table 67. Conduit Style



(A) For ISO 20-1.5 x 12.5 mm inside threads, add -S6 to the catalog number. Example: Cat. No. 802PR-LABB2 becomes Cat. No. 802PR-LABB2-S6.


Table 67. Conduit Style (continued)

 <p>Front Mounting Hole Pattern Front View</p> <p>Two Holes for #10 or M5 Screws</p>	 <p>Rear Mounting Hole Pattern Front View</p> <p>Two #10-32 Tapped Holes 9.5 (0.38) Deep (LB Version Only)</p>
---	--

IMPORTANT: The sensor output is designed and approved as Intrinsically Safe for use in Division 1, 2; Class I, II, III; Groups A, B, C, D, E, F, G hazardous location areas when used with a Cat. No. 937ZH-DPBN-1 or 937ZH-DPDP-2 Intrinsically Safe Zener Barrier. Installation must be in accordance with the National Electrical Code, ANSI/ISA RP12.6, or per other regulations by the authority having jurisdiction over the installation site as appropriate.

Wiring Diagrams

Figure 116. Conduit Style



IMPORTANT: Load can be switched to Terminal 1.

871F 3-wire DC Rectangular Sensors



871F DC Cable Style



871F DC M12 Micro Quick Disconnect Style

Specifications

Attribute	871F Block Style
Load current	≤ 400 mA
Load current, min	1 mA
Leakage current	≤ 10 µA
Operating voltage	10...30V DC
Voltage drop	≤ 2.4V
Repeatability	≤ 10%
Hysteresis	≤ 15% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 12, 13; IP67 (IEC529)
Housing material	Aluminum body
Connection type	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) length, 3-conductor PVCQuick disconnect: 4-pin M12 micro style
Status indicators	Orange: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						Cable Style	M12 Micro QD Style
50 (1.97)	70 (2.96)	No	N.O.	NPN	300	871F-D70NN50-E2	871F-D70NN50-D4
				PNP		871F-D70NP50-E2	871F-D70NP50-D4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)							889D-F4AC-2

Approximate Dimensions

Dimensions in mm (in.) unless otherwise noted.

Figure 117. Cable Style


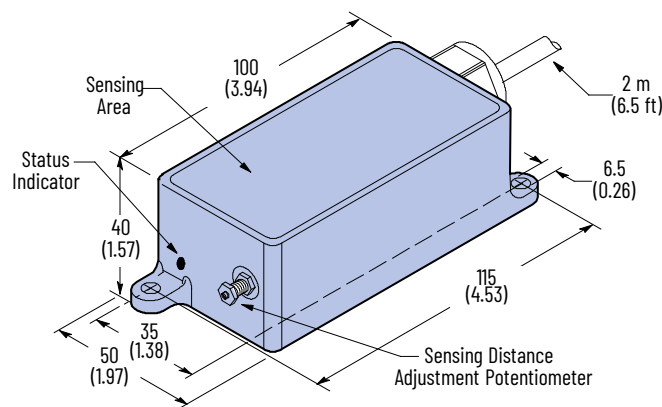


Figure 118. Micro QD Style

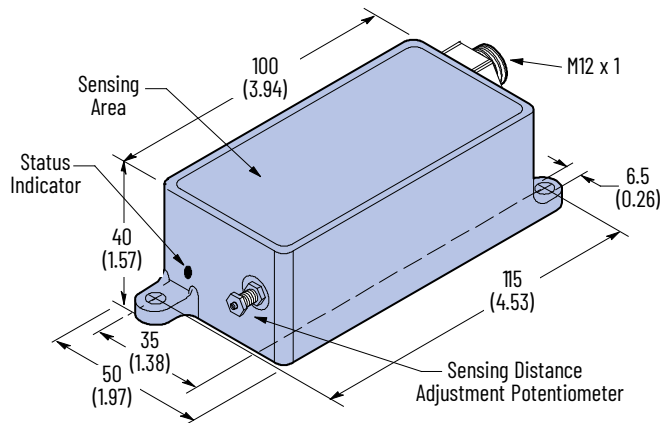

Wiring Diagrams

Table 68. Cable Style

Normally Open (N.O)

--	--

Table 69. Micro QD Style

Normally Open (N.O)

--	--

871F 4-wire DC Complementary Output Rectangular Sensors



871F DC Mini Quick Disconnect Style



871F DC M12 Micro Quick Disconnect Style

Specifications

Attribute	871F Flat Pack Style
Load current, max	200 mA
Load current, min	1 mA
Leakage current	≤ 10 µA
Operating voltage	10...30V DC
Voltage drop	≤ 2.5V
Repeatability	≤ 2%
Hysteresis	≤ 5% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, overload
Certifications	cULus Listed, CE Marked for all applicable all directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6, 6P, 12 and 13; IP67 (IEC529), 1200 psi (8270 kPa) washdown; M12 micro connector versions also meet IP69K (IEC529)
Connection type	<ul style="list-style-type: none">Quick disconnect: 4-pin mini, 4-pin M12 microConduit opening: 1/2 - 14NPT thread, PG 13.5 thread
Status indicator	<ul style="list-style-type: none">Green: PowerOrange: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3


Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.			
						Mini QD Style	M12 Micro QD Style	Conduit 1/2 NPT	Conduit PG13.5
83 (3.27)	50 (1.97) 35	Yes	N.O. and N.C.	PNP	100	871F-P50BP80-N4	871F-P50BP80-D4	871F-P50BP80-T4	871F-P50BP80-Q4
				NPN		871F-P50BN80-N4	871F-P50BN80-D4	871F-P50BN80-T4	871F-P50BN80-Q4
	65 (2.56)	No		PNP		871F-N65BP80-N4	871F-N65BP80-D4	871F-N65BP80-T4	871F-N65BP80-Q4
				NPN		871F-N65BN80-N4	871F-N65BN80-D4	871F-N65BN80-T4	871F-N65BN80-Q4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F4AFC-6F	889D-F4AC-2	—	—

Approximate Dimensions

Dimensions shown in mm (in.).

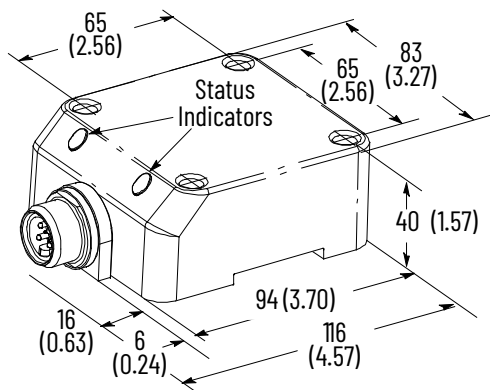Figure 119. Mini QD Style



35. Must be fully embedded in mild steel to achieve maximum sensing distance.




Figure 120. M12 Micro QD Style

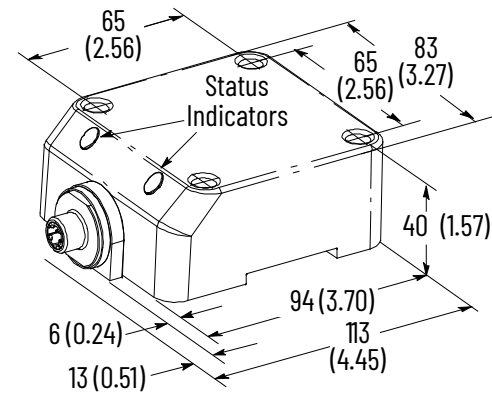


Figure 121. Conduit Style 1/2 in. NPT


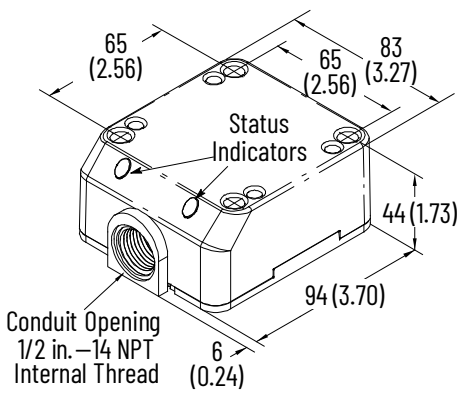


Figure 122. Conduit Style PG13.5

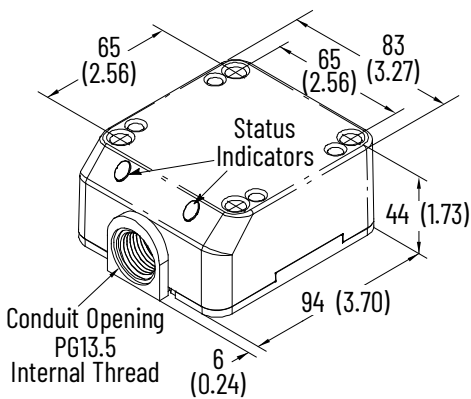

Wiring Diagrams

Table 70. Mini QD Style

Complimentary Normally Open (N.O.) and Normally Closed (N.C.) Outputs	
PNP (Sourcing)	NPN (Sinking)

Table 71. M12 Micro QD Style

Complimentary Normally Open (N.O.) and Normally Closed (N.C.) Outputs	
PNP (Sourcing)	NPN (Sinking)

Table 72. Conduit Style 1/2 in. NPT and Conduit Style PG13.5

Complimentary Normally Open (N.O.) and Normally Closed (N.C.) Outputs	
PNP (Sourcing)	NPN (Sinking)

871F 2-wire AC/DC Rectangular Sensors

		
871F AC/DC Cable Style	871F DC Mini Quick Disconnect Style	871F DC Micro Quick Disconnect Style

Specifications

Attribute	871F Flat Pack Style
Load current, max	100 mA
Load current, min	5 mA
Leakage current	≤ 1.7 mA at 120V; ≤ 2 mA at 250V
Operating voltage	20...250V AC/DC
Voltage drop	≤ 10V
Repeatability	≤ 5%
Hysteresis	≤ 10% typical
Protection type	False pulse, transient noise, short circuit, and overload
Certifications	cULus Listed, CE Marked for all applicable all directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6, 6P, 12 and 13; IP67 (IEC529), 1200 psi (8270 kPa) washdown; micro connector versions also meet IP69K (IEC529)
Connection type	<ul style="list-style-type: none">Cable: 2 m (6.5 ft), 2-conductor 22 AWG ToughLinkQuick disconnect: 3-pin mini style, 3-pin micro styleConduit opening: 1/2 - 14NPT thread, PG 13.5 thread
Status indicator	<ul style="list-style-type: none">Green: PowerOrange: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3


Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Config.	Switching Frequency [Hz]	Cat. No.				
					ToughLink Cable	Mini QD Style	Micro QD Style	Conduit 1/2 NPT	Conduit PG13.5
83 (3.27)	50 (1.97) 36	Yes	N.O.	10	871F-R50N80-C2	871F-R50N80-N3	871F-R50N80-R3	871F-R50N80-T2	871F-R50N80-Q2
	65 (2.56)	No			871F-K65N80-C2	871F-K65N80-N3	871F-K65N80-R3	871F-K65N80-T2	871F-K65N80-Q2
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F	889R-F3ECA-2	—	—

Approximate Dimensions

Dimensions shown in mm (in.).

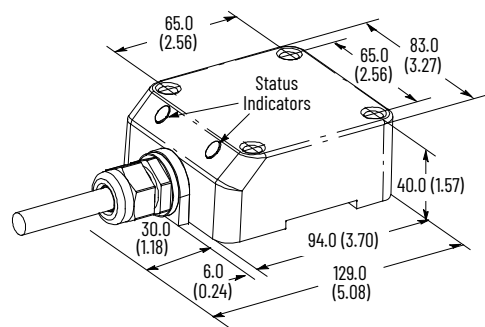Figure 123. Cable Style



36. Must be fully embedded in mild steel to achieve maximum sensing distance.



Figure 124. Mini QD Style

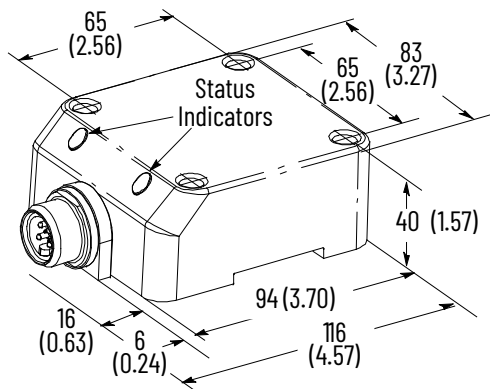


Figure 125. Micro QD Style

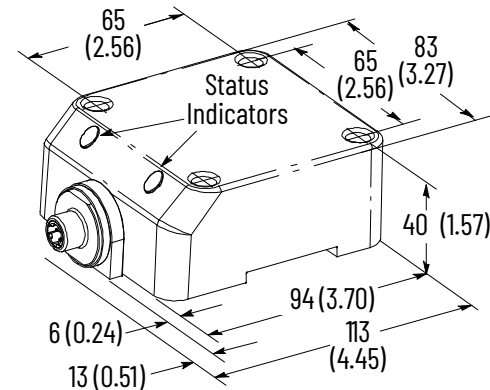


Figure 126. Conduit Style 1/2 in. NPT


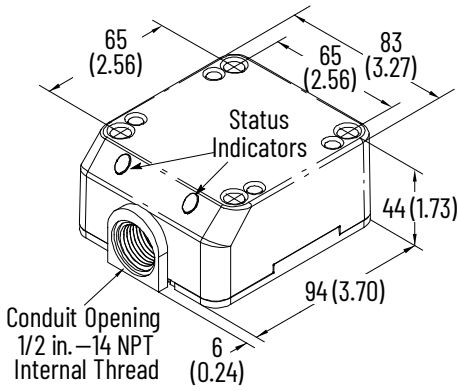



Figure 127. Conduit Style PG13.5

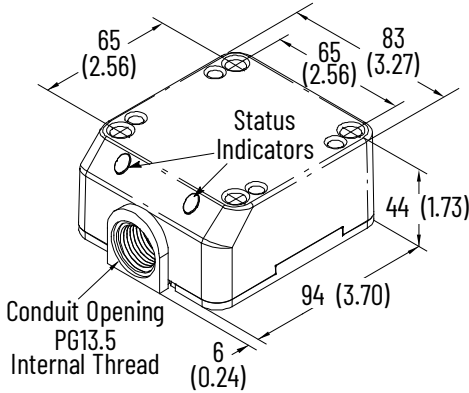

Wiring Diagrams

Table 73. Cable Style

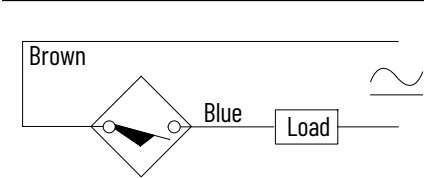
Normally Open (N.O)



IMPORTANT: Load can be switched to brown wire.

Table 74. Mini QD Style


Normally Open (N.O)



IMPORTANT: Load can be switched to Pin 3.

Table 75. Micro QD Style


Normally Open (N.O)



IMPORTANT: Load can be switched to Pin 2.

Table 76. Conduit Style 1/2 in. NPT and Conduit Style PG13.5

Normally Open (N.O.)



IMPORTANT: Load can be switched to Terminal 2.

871F 4-wire DC Weld Field Immune Rectangular Sensors



871F DC Mini Quick Disconnect Style



871F DC M12 Micro Quick Disconnect Style

Specifications

Attribute	871F Flat Pack Style
Load current	≤ 200 mA
Load current, min	1 mA
Leakage current	≤ 10 µA
Operating voltage	10...30V DC
Voltage drop	≤ 2.5V
Repeatability	≤ 5%
Hysteresis	≤ 5% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload weld field immunity 1600 Gauss
Certifications	cULus Listed, CE Marked for all applicable all directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6P, 12 and 13; IP67 (IEC529), 1200 psi (8270 kPa) washdown; M12 micro connector versions also meet IP69K (IEC529)
Housing material	Valox
Connection type	Quick disconnect: 4-pin mini style, 4-pin M12 micro style
Status indicator	<ul style="list-style-type: none">Green: PowerOrange: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	5 g (0.18 oz)
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors


Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						Mini QD Style	M12 Micro QD Style
83 (3.27)	40 (1.57) 37	Yes	N.O. and N.C.	PNP	15	871F-PW40BP80-N4	871F-PW40BP80-D4
				NPN		871F-PW40BN80-N4	871F-PW40BN80-D4
	50 (1.97)	No		PNP		871F-NW50BP80-N4	871F-NW50BP80-D4
				NPN		871F-NW50BN80-N4	871F-NW50BN80-D4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F4AFC-6F	889D-F4WE-2

Approximate Dimensions

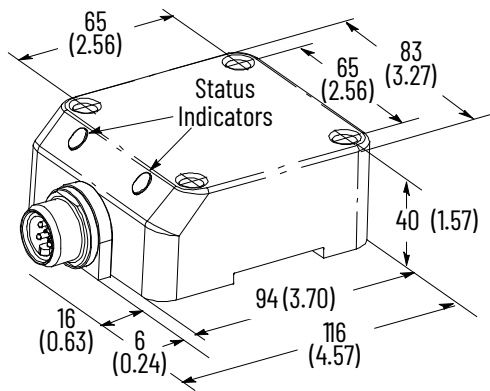
Figure 128. Mini QD Style



37. Must be fully embedded in mild steel to achieve maximum sensing distance.



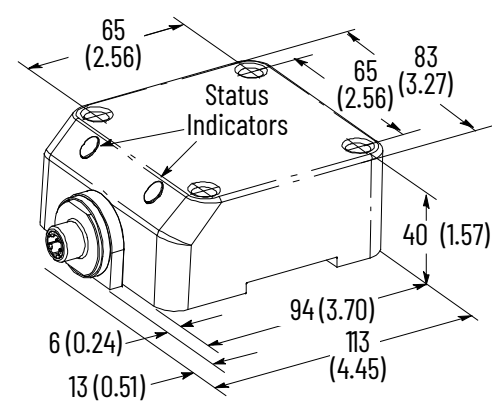Figure 129. M12 Micro QD Style



Wiring Diagrams

Table 77. Mini QD Style

Complimentary Normally Open (N.O.) and Normally Closed (N.C.) Outputs

PNP (Sourcing)	NPN (Sinking)

Table 78. M12 Micro QD Style

Complimentary Normally Open (N.O.) and Normally Closed (N.C.) Outputs

PNP (Sourcing)	NPN (Sinking)

871F 2-wire AC/DC Weld Field Immune Rectangular Sensors – Flat Pack Style



871F AC Micro Quick Disconnect Style

Specifications

Attribute	871F Flat Pack Style
Load current	≤ 100 mA
Load current, min	5 mA
Leakage current	≤ 1.7 mA at 120V; ≤ 2 mA at 250V
Operating voltage	20...250V AC/DC
Voltage drop	≤ 10V
Repeatability	≤ 5%
Hysteresis	10% typical
Protection type	False pulse, transient noise, short circuit, and overload
Weld field immunity	Gauss
Certifications	cULus Listed, CE Marked for all applicable all directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6P, 12 and 13; IP67 (IEC529), 1200 psi (8270 kPa) washdown; micro connector versions also meet IP69K (IEC529)
Housing material	Valox
Connection type	Quick disconnect: 3-pin micro style
Status indicator	<ul style="list-style-type: none">Green: PowerRed: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors	
	Shielded	Unshielded
Steel	1.0	1.0
Stainless steel	0.7...0.8	0.7...0.8
Brass	0.5...0.6	0.4...0.5
Aluminum	0.4...0.5	0.4...0.5
Copper	0.4...0.5	0.4...0.5


Product Selection

Table 79. Micro QD Style

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
83 (3.27)	40 (1.57) 38	Yes	N.O.	10	871F-JW40N80-R3
	50 (1.97)	No			871F-KW50N80-R3
Recommended standard QD cordset: -2 = 2 m (6.5 ft)					889R-F3WEA-2

Approximate Dimensions

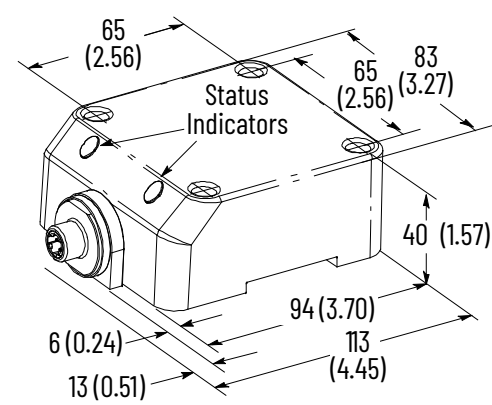Figure 130. Micro QD Style




38. Must be fully embedded in mild steel to achieve maximum sensing distance.




Wiring Diagrams

Figure 131. Micro QD Style



IMPORTANT: Load can be switched to Pin 2.

871F 2-wire AC/DC Weld Field Immune Rectangular Sensors – Puck Style



871F Mini and AC Micro Quick Disconnect Style

Specifications

Attribute	871F Puck Style
Load current	≤ 400 mA
Load current, min	3 mA
Inrush current (one cycle)	≤ 8 A
Leakage current	≤ 1.5 mA
Operating voltage	20...250V AC/DC
Voltage drop	≤ 5V
Repeatability	≤ 10%
Hysteresis	≤ 15% typical
Protection type	Short circuit, false pulse, and transient noise
Weld field immunity	20,000 A at 25.4 mm (1 in.)
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 4 and 13, IP67 (IEC529)
Housing material	Aluminum body, PTFE sensing area
Connection type	Quick disconnect: 3-pin mini style, 3-pin micro style
Status indicator	<ul style="list-style-type: none">Green: PowerOrange: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.	
					Mini QD Style	Micro QD Style
50 (1.97)	20 (0.79)	Yes	N.O.	15	871F-BW20N50-N3	871F-BW20N50-R3
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)					889N-F3AFC-6F	889R-F3WEA-2

Approximate Dimensions

Figure 132. Mini QD Style


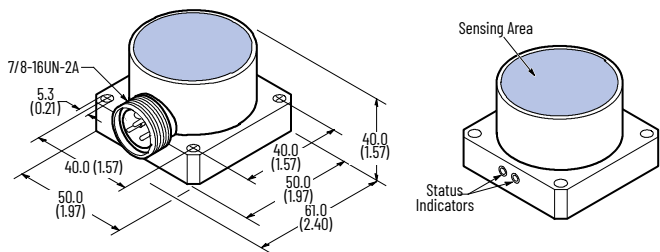



Figure 133. Micro QD Style

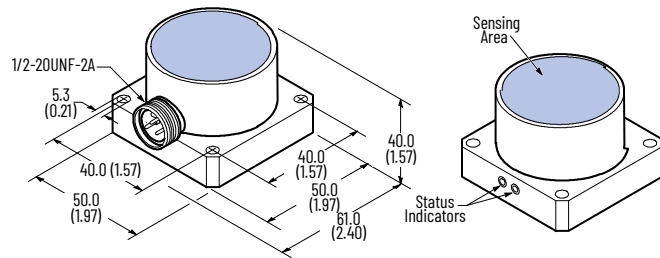

Wiring Diagrams

Table 80. Mini QD Style


Normally Open (N.O)



IMPORTANT: Load can be switched to Pin 3.

Table 81. Micro QD Style

Normally Open (N.O)



IMPORTANT: Load can be switched to Pin 2.

871FM Miniature Metal Flat Pack Sensors



 <p>871FM Cable Style</p> <p>30 x 52 x 14 mm</p> <p>(1.18 x 2.04 x 0.55 in.)</p>	 <p>871FM Micro QD Pigtail Style</p> <p>20 x 32 x 8 mm</p> <p>(0.94 x 1.25 x 0.31 in.)</p>	 <p>871FM Pico QD Pigtail Style</p> <p>20 x 32 x 8 mm</p> <p>(0.94 x 1.25 x 0.31 in.)</p>
---	---	--

Specifications

Attribute	General-purpose	Weld Field Immune
Load current	≤ 50 mA at 12V, ≤ 100 mA for 20 x 8 x 32 and 30 x 14 x 52	
Leakage current	≤ 10 μA	
Operator voltage	10...30V	
Voltage drop	≤ 1.8V	
Switching frequency	≤ 200 Hz	≤ 50 Hz
Power-on delay (time delay before availability)	< 80 ms	
No-load supply current	≤ 30 mA	
Repeatability	≤ 5%	
Hysteresis	5% typical	
Protection type	False pulse on power, transient noise, reverse polarity, short circuit, and overload	
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	IP69K	IP67
Housing material	Stainless steel 303 with stainless-steel face	
Factor-1 equal sensing	Yes	

Inductive Proximity Sensor Specifications

Attribute	General-purpose	Weld Field Immune
Connections	203.2 mm (8 in.) pigtail with 4-pin Micro QD or 4-pin Pico™ QD, 2 m (6.6 ft) PVC cable	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Operating Humidity	5...95% relative (noncondensing)	
Shock	30 g (1.06 oz) with 11 ms pulse duration	
Vibration	55 Hz, 1 mm amplitude	

IO-Link		
Protocol	IO-Link V1.1	
Interface type	IO-Link	
Mode	COM 2 (38.4 kBd)	
Cycle time	10.4 ms, min	
SIO (standard I/O)	Supported (pin 4 for either IO-Link or SIO)	

Status Indication

Green Indicator (Power)	Orange Indicator (Output)	Condition
Off	Off	Power off
On	Off	Powered on/no target
Off	On	Target present
Off	Flash at 2 Hz	Passed on point (margin zone)
Flash at 2 Hz	Off	Short circuit, fault
Flash at 2 Hz	Flash at 2 Hz; Reverse from green status indicator	Location Indication mode

Product Selection


Housing Dimension WxHxD [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Fre quency [Hz]	Weld Immune	Connector Type	Cat. No.
20 x 8 x 32 (0.78 x 0.31 x 1.25)	7 (0.27)	Yes	Complementary N.O/N.C., auto-detect NPN, or PNP on power-up	≤ 200	No	PVC pigtail, DC Micro QD, 4-pin	871FM-M7BA20-FD02
				≤ 200	No	PVC cable, 2 m	871FM-M7BA20-E2
				≤ 50	Yes - ToughCoat Finish™ weld slag coating	PVC pigtail, DC Micro QD, 4-pin, weld tube cable protection	871FM-MV7BA20-FD02X
30 x 14 x 52 (1.18 x 0.55 x 2.04)	10 (0.39)	Yes		≤ 200	No	PVC pigtail, DC Micro QD, 4-pin	871FM-M10BA30-FD02
				≤ 200	No	PVC cable, 2 m	871FM-M10BA30-E2
				≤ 50	Yes - ToughCoat Finish weld slag coating	PVC pigtail, DC Micro QD, 4-pin, weld tube cable protection	871FM-MV10BA30-FD02X
20 x 8 x 32 (0.78 x 0.31 x 1.25)	7	Yes		≤ 200	No	PVC pigtail, DC Pico QD, 4-pin	871FM-M7BA20-FP02
20 x 8 x 32 (0.78 x 0.31 x 1.25)	7	Yes		≤ 50	Yes - ToughCoat Finish weld slag coating	PVC pigtail, DC Pico QD, 4-pin	871FM-MV7BA20-FP02X
30 x 14 x 52 (1.18 x 0.55 x 2.04)	10	Yes		≤ 200	No	PVC pigtail, DC Pico QD, 4-pin	871FM-M10BA30-FP02
30 x 14 x 52 (1.18 x 0.55 x 2.04)	10	Yes		≤ 50	Yes - ToughCoat Finish weld slag coating	PVC pigtail, DC Pico QD, 4-pin	871FM-MV10BA30-FP02X

39. For weld field immune units, the thickness of the weld slag coating on the sensor face [approximately 0.5 mm (0.02 in.)] reduces the nominal range

40. All catalog numbers that are listed in this table are IO-Link enabled.


Approximate Dimensions

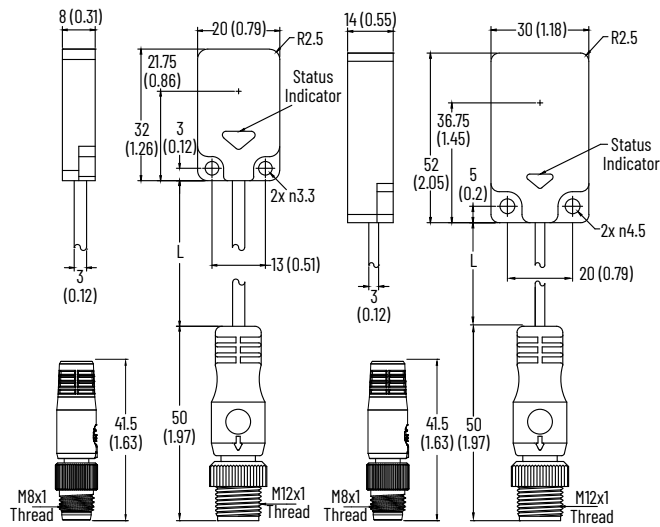Dimensions shown in mm (in.).




Mounting

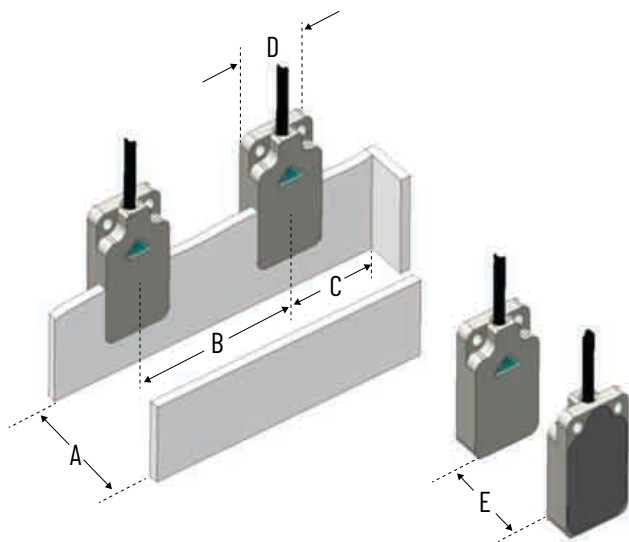Dimensions shown in mm (in.).




Sensor (WxLxH)	A	B	C	D	E
20 x 32 x 8 Shielded, 7 mm sensing	24 (0.94)	24 (0.94)	20 (0.79)	20 (0.79)	48 (1.89)
30 x 52 x 14 Shielded, 10 mm sensing	45 (1.77)	45 (0.79)	30 (1.18)	30 (1.18)	90 (3.54)

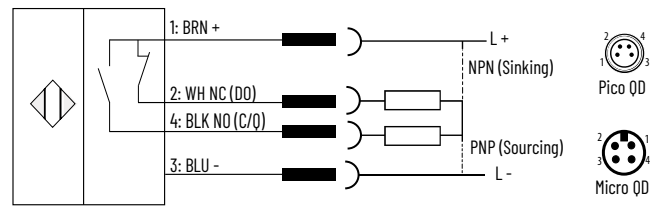Wiring Diagrams



Cable Material	Standard: PVC Weld tube: PUR
Cable Diameter	Standard: 3.05 mm (0.12 in.) Weld tube: 6 mm (0.24 in.)
Wire Gauge	26 AWG, 0.75 mm (0.03 in.), 4 conductor

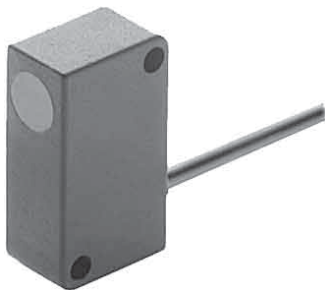871FM 3-wire DC Plastic Rectangular Sensors



871 FM DC Cable Style
28 x 16 x 11 mm

Specifications

Attribute	871FM Miniature Flat Pack Style (Plastic Housing)
Current consumption	< 11 mA
Load current	≤ 200 mA
Leakage current	≤ 100 µA
Operating voltage	10...30V DC
Voltage drop	≤ 1.8V
Repeatability	≤ 5%
Hysteresis	10% typical
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 4; IP67 (IEC 529)
Housing material	Plastic
Connection type	<ul style="list-style-type: none">Cable: 2 m (6.5 ft) length, 3-conductor PVCQuick disconnect: 3-pin Pico style
Status indicator	Yellow: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm (0.039 in.) amplitude, 3 planes

Correction Factors

Target Material	Correction Factors
Steel	1.0
Stainless steel	0.85
Brass	0.55
Aluminum	0.5
Copper	0.45


Product Selection

Housing Diameter [mm (in.)]	Sensing Direction	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
							Cable Style	Pico QD Style
28 x 16 x 11 (1.1 x 0.63 x 0.43)	Side	2 (0.08)	Yes	N.O.	PNP	600	871FM-D2NP11-E2	871FM-D2NP11-P3
				N.C.	PNP		871FM-D2CP11-E2	—
Recommended standard QD cordset: -2 = 2 m (6.5 ft)							889P-F3AB-2	

Approximate Dimensions

Dimensions shown in mm (in.).

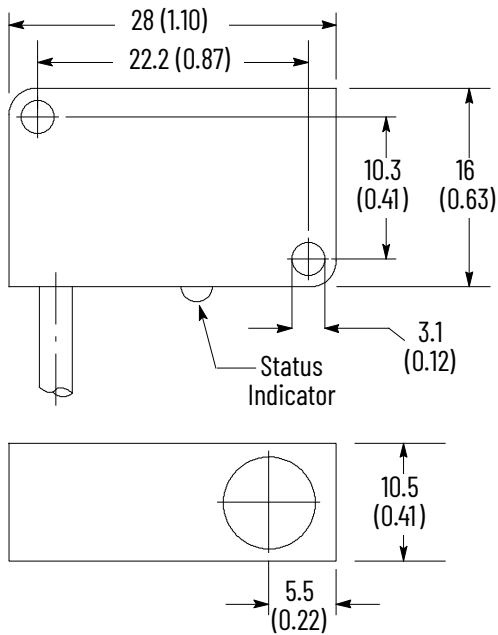Figure 134. Cable and Pico QD Style (28 x 16 x 11 mm)



Wiring Diagrams

Table 82. Cable Style (28 x 16 x 11 mm)

Normally Open (N.O.)

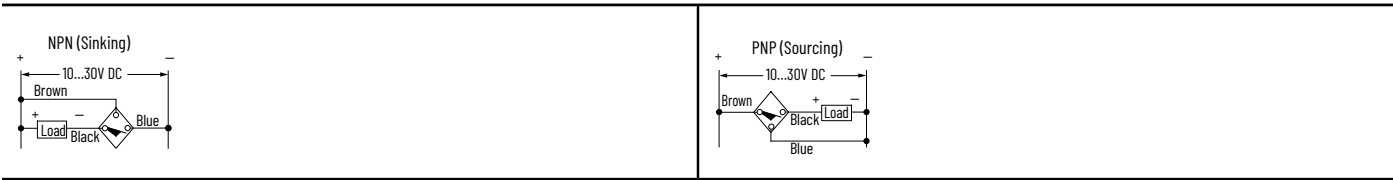


Table 83. Pico QD Style (28 x 16 x 11 mm)

Normally Closed (N.C.)


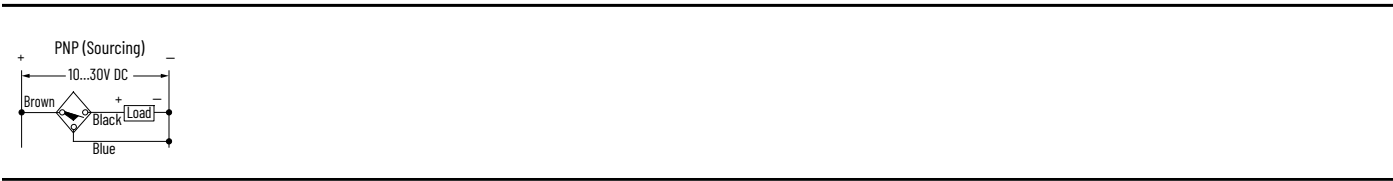


Table 84. Pico QD Style (28 x 16 x 11 mm)

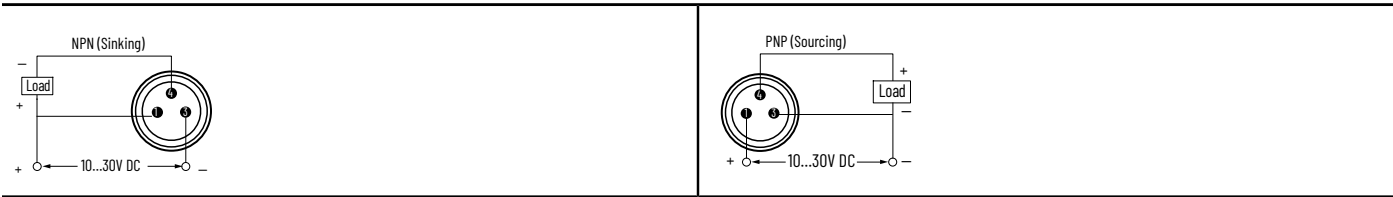Normally Open (N.O.) or Normally Closed (N.C.)



871FM 3-wire DC Metal Rectangular Sensors



871FM DC Pico MS Square



871FM DC Cable MS Square

Specifications

Attribute	871FM Miniature Flat Pack Style (Metal Housing)
Certifications	UL Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Environmental	
Operating environment	IP67 (IEC 529)
Operating temperature	-25...+70 °C (-13...+158 °F)
Vibration	10...55 Hz, 1 mm amplitude, 3 planes
Shock	30 g (1.06 oz), 11 ms
Electrical	
Load current	≤ 200 mA
Leakage current	0.1 mA
Operating voltage	10...30V DC
Voltage drop	2.4V
Repeatability	10%
Hysteresis	12% typical
Protection type	False pulse, transient noise, reverse polarity, and short circuit
IO-Link	
Protocol	O-Link V1.0
Interface type	IO-Link
Mode	COM 2 (38.4 kBd)

Inductive Proximity Sensor Specifications

Attribute	871FM Miniature Flat Pack Style (Metal Housing)
Cycle time	10.4 ms, minimum
SIO (standard I/O)	Supported (pin 4 for either IO-Link or SIO)
Mechanical	
Housing material	Nickel-plated brass, polyester face
Status indicator (SIO mode)	Yellow: Output energized
Status indicator (IO-Link mode)	Steady yellow: Sensor in IO-Link mode
Connection type	Cable, Pico QD, or Pico with lead

Correction Factors

Sensor Type/Target Material (No Surrounding Metal)	M5 Square	M8 Square	
	Shielded	Shielded	Unshielded
Steel	1	1	1
Copper	0.6	0.45	0.27
Aluminum	0.6	0.5	0.36
Brass	0.7	0.6	0.45
Stainless steel 304	0.85	0.8	0.77

Switching Frequency

Head Size	Nominal Sensing Distance [mm (in.)]	Switching Frequency [Hz]
5 mm	0.8 (0.03)	5000
	1.5 (0.06)	3000
8 mm	2 (0.08)	3000
	3 (.12)	1000


Product Selection

Housing Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.		
						Cable Style	Pico Style	Leaded Pico Style
5 (0.2)	0.8 (0.03)	Yes	N.O.	NPN	5000	871FM-M1NN5-E2	—	871FM-M1NN5-AP3
				PNP		871FM-M1NP5-E2	—	871FM-M1NP5-AP3
	1.5 (0.06)			NPN	3000	871FM-M2NN5-E2	—	871FM-M2NN5-AP3
				PNP		871FM-M2NP5- E2	—	871FM-M2NP5-AP3
8 (0.3)	2 (0.08)	Yes	N.O.	NPN	3000	871FM-M2NN8-E2	871FM-M2NN8-P3	—
				PNP		871FM-M2NP8- E2	871FM-M2NP8-P3	—
	3 (0.12)	No		NPN	1000	871FM-N3NN8-E2	871FM-N3NN8-P3	—
				PNP		871FM-N3NP8-E2	871FM-N3NP8-P3	—
Recommended standard QD cordset: -2 = 2 m (6.5 ft)							889P-F3AB-2	889P-F3AB-2

Approximate Dimensions


Dimensions shown in mm (in.).

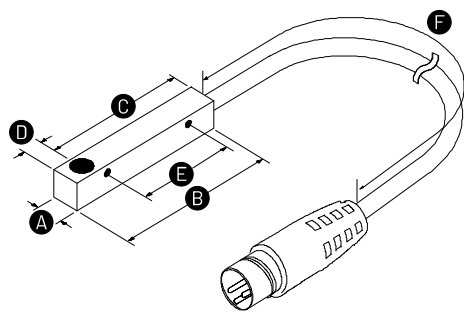Figure 135. M5 and M8 Square Cable and Lead



Housing Size	Shielded	Dimensions [mm (in.)]					
		A	B	C	D	E	F (Lead Model)
M5	Yes	5 (0.197)	25 (0.984)	22 (0.866)	3 (0.118)	14 (0.551)	152.4 (6)
M8		8 (0.315)	40 (1.575)	35 (1.378)	5 (0.197)	20 (0.787)	152.4 (6)

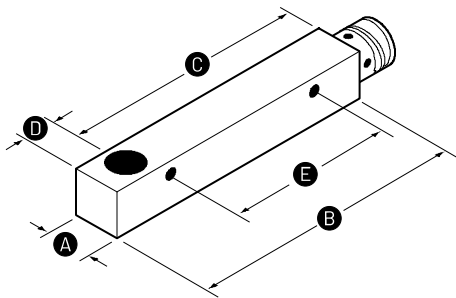Figure 136. M8 Square 3-pin Pico



Housing Size	Shielded	Dimensions [mm (in.)]				
		A	B	C	D	E
M8	Yes	8 (0.315)	50 (1.969)	45 (1.772)	5 (0.197)	20 (0.787)

Wiring Diagrams

Table 85. M5 and M8 Square Cable and Lead

Normally Open (N.O.)

<p>NPN (Sinking)</p>	<p>PNP (Sourcing)</p>
<p>NPN (Sinking)</p>	<p>PNP (Sourcing)</p>

Table 86. M8 Square 3-Pin Pico

Normally Open (N.O.)

<p>NPN (Sinking)</p>	<p>PNP (Sourcing)</p>
----------------------	-----------------------

871L and 872L 3-wire DC Rectangular Sensors

		
871L and 872L DC Mini Quick Disconnect Style	871L and 872L DC M12 Micro Quick Disconnect Style	871L and 872L DC Conduit Style

Specifications

Attribute	871L Limit Switch Style	872L Limit Switch Style
Load current	≤ 400 mA	≤ 200 mA
Leakage current	≤ 10 µA	
Operating voltage	10...60V DC	10...30V DC
Voltage drop	≤ 2.4V	≤ 2.5V
Repeatability	≤ 5%	
Hysteresis	≤ 20% typical	
Protection type	False pulse, transient noise, reverse polarity, short circuit, and overload	
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 3, 4, 6, 12, 13; IP67 (IEC 529)	
Housing material	Polyloy	
Connection type	<ul style="list-style-type: none">Quick disconnect: 4-pin mini, 4-pin M12 microConduit opening: 1/2-14 NPT internal thread with screw terminals	
Status indicators	<ul style="list-style-type: none">Green: Power (blinks in SCP/overload)Orange: Output energizedRed: Alignment indicator	<ul style="list-style-type: none">Green: Power (blinks in SCP/overload)Orange: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock	30 g (1.06 oz), 11 ms	
Vibration	55 Hz, 1 mm amplitude, 3 planes	

Correction Factors

Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.		
						Conduit Style	Mini QD Style	M12 Micro QD Style
40 (1.57)	20 (0.79)	Yes	Selectable N.O. or N.C.	NPN	150	871L-D20EN40-T3	—	871L-D20EN40-D4
				PNP		871L-D20EP40-T3	871L-D20EP40-N4	871L-D20EP40-D4
	40 (1.57)	No		NPN	70	871L-D40EN40-T3	871L-D40EN40-N4	871L-D40EN40-D4
				PNP		871L-D40EP40-T3	871L-D40EP40-N4	871L-D40EP40-D4
	20 (0.79)	Yes	Programmable N.O. or N.C.	NPN	100	872L-D20EN40-T3	872L-D20EN40-N4	872L-D20EN40-D4
				PNP		872L-D20EP40-T3	872L-D20EP40-N4	872L-D20EP40-D4
	40 (1.57)	No		NPN	50	872L-D40EN40-T3	—	872L-D40EN40-D4
				PNP		872L-D40EP40-T3	—	872L-D40EP40-D4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)							889N-F4AFC-6F	889D-F4AC-2

Approximate Dimensions

Dimensions shown in mm (in.).

IMPORTANT: Head of conduit and mini style sensors can be rotated in 22.5° increments to provide 16 side-sensing positions or rotated for top-sensing.

Figure 137. Conduit Style

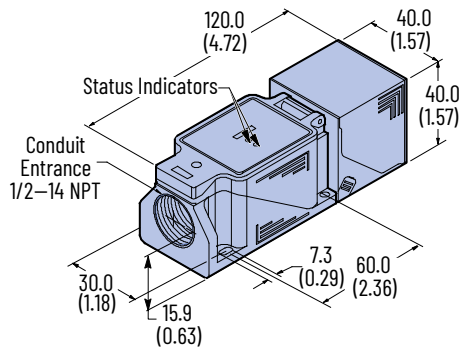


Figure 138. Mini QD Style


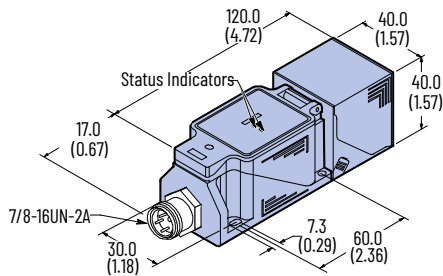




Figure 139. M12 Micro QD Style

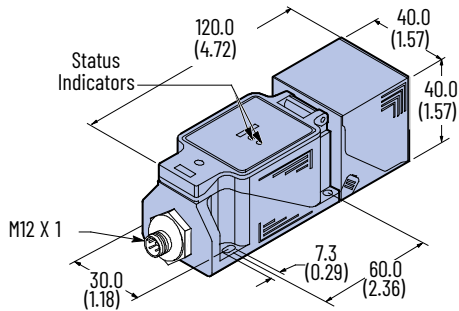



Wiring Diagrams

Table 87. Conduit Style

Normally Open (N.O.)

NPN (Sinking)	PNP (Sourcing)
	

Normally Closed (N.C.)

	
---	--

Normally Closed (N.C.)



NPN (Sinking)	PNP (Sourcing)
	

Table 88. Mini QD Style

Normally Open (N.O.) or Normally Closed (N.C.)




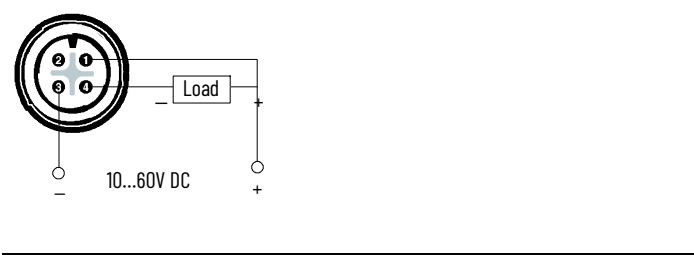
NPN (Sinking)	PNP (Sourcing)
	

Table 89. Micro QD Style

Normally Open (N.O.) or Normally Closed (N.C.)

NPN (Sinking)	PNP (Sourcing)
 The diagram shows an NPN sensor with four pins. Pin 1 is connected to a load, which is then connected to the positive terminal of a 10...60V DC power source. Pin 2 is connected to the negative terminal of the power source. Pins 3 and 4 are not connected.	 The diagram shows a PNP sensor with four pins. Pin 1 is connected to the positive terminal of a 10...60V DC power source. Pin 2 is connected to a load, which is then connected to the negative terminal of the power source. Pins 3 and 4 are not connected.

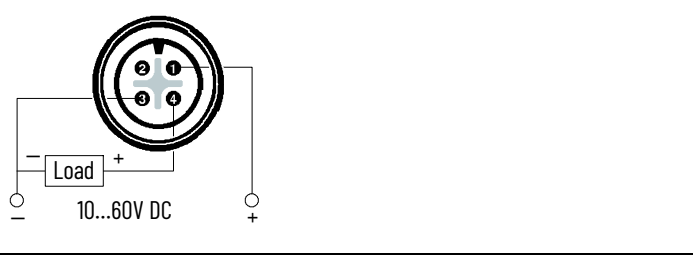871L AC/DC and 872L AC 2-wire Rectangular Sensors



871L and 872L DC Mini Quick Disconnect Style



871L and 872L DC AC Micro Quick Disconnect Style



871L and 872L DC Conduit Style

Specifications

Attribute	871L Limit Switch Style	872L Limit Switch Style
Load current	≤ 400 mA	≤ 500 mA
Load current, min	2 mA	
Inrush current (one cycle)	≤ 8 A	
Leakage current	≤ 2 mA	
Operating voltage	20...250V AC/DC	20...250V AC
Voltage drop	≤ 5V	
Repeatability	≤ 5%	
Hysteresis	≤ 20%	
Protection type	False pulse and transient noise	
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations	
Enclosure type rating	NEMA 3, 4, 6, 12, 13; IP65 (IEC 529)	
Housing material	Polyloy	
Connection type	<ul style="list-style-type: none">Quick disconnect: 3-pin mini style, 3-pin micro styleConduit opening: 1/2-14 NPT internal thread with screw terminals	
Status indicators	<ul style="list-style-type: none">Green: Power (blinks in SCP/overload)Orange: Output energized	
Operating temperature	-25...+70 °C (-13...+158 °F)	
Shock	30 g (1.06 oz), 11 ms	
Vibration	55 Hz, 1 mm amplitude, 3 planes	

Correction Factors

Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.		
					Conduit Style	Mini QD Style	AC Micro QD Style
40 (1.57)	20 (0.79)	Yes	Selectable N.O. or N.C.	15	871L-B20E40-T2	871L-B20E40-N3	871L-B20E40-R3
	40 (1.57)	No			871L-B40E40-T2	871L-B40E40-N3	871L-B40E40-R3
	20 (0.79)	Yes	Programmable N.O. or N.C.		872L-A20E40-T2	872L-A20E40-N3	872L-A20E40-R3
	40 (1.57)	No			872L-A40E40-T2	872L-A40E40-N3	872L-A40E40-R3
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F	889R-F3ECA-2

Approximate Dimensions

Dimensions shown in mm (in.).

IMPORTANT: Head of conduit and mini style sensors can be rotated in 22.5° increments to provide 16 side-sensing positions or rotated for top-sensing.

Figure 140. Conduit Style

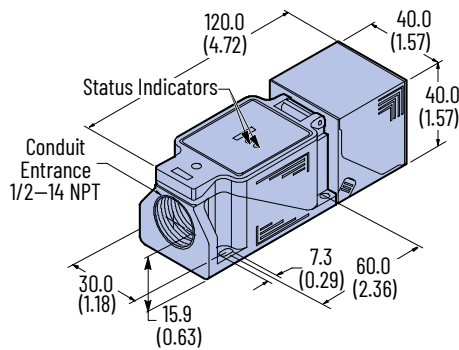


Figure 141. Mini QD Style


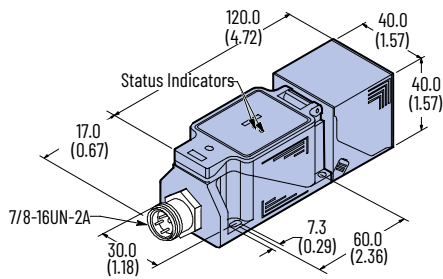


Figure 142. M12 Micro QD Style

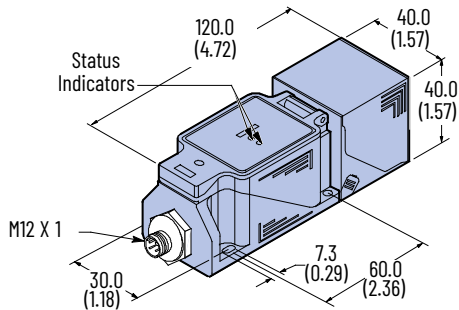

Wiring Diagrams

Table 90. Conduit Style

Normally Open (N.O.)	Normally Closed (N.C.)

IMPORTANT: Load can be switched to Terminal 1.


Table 91. Mini QD Style

Normally Open (N.O.) or Normally Closed (N.C.)

IMPORTANT: Load can be switched to Pin 3.

Table 92. AC Micro QD Style

Normally Open (N.O.) or Normally Closed (N.C.)



IMPORTANT: Load can be switched to Pin 2.

871P 2-wire AC Rectangular Sensors



871P AC Long Range Mini QD Style
76 x 36 x 58 mm

Specifications

Attribute	871P Can Sensor
Load current, max	300 mA
Load current, min	15 mA
Leakage current	< 1.5 mA
Inrush current	< 5 A (20 ms)
Operating voltage	30...150V AC RMS
Line frequency	40...60 Hz
Voltage drop	< 15V at 300 mA
Repeatability	≤ 2%
Hysteresis	10% typical
Protection type	False pulse, transient noise, short circuit, and overload
Certifications	UL Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 3, 4, 4X, 6, 6P, 12, 13; IP67 (IEC 529), 1200 psi (8270 kPa) washdown
Connection type	3-pin mini style
Status indicator	Red: Output energized
Operating temperature	-20...+70 °C (0...160 °F)

Product Selection


Table 93. Mini QD Style

Style	Container Size	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.
Long range	202...704	Steel: 29 (1.15), Aluminum: 15 (0.6)	Yes	N.O.	25	871P-AC29N140-N3
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F3AFC-6F

Approximate Dimensions


Dimensions shown in mm (in.).

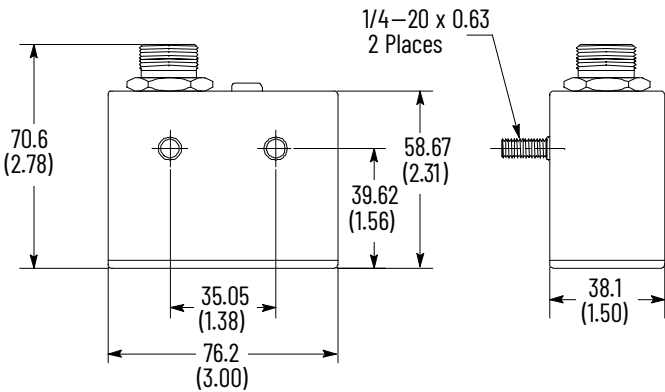Figure 143. Long -Range Mini QD Style




Wiring Diagrams

Figure 144. Long -Range Mini QD Style



IMPORTANT: Load can be switched to Pin 2.

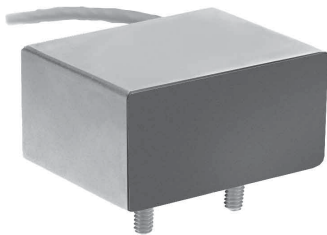871P 4-wire DC Rectangular Sensors



871P DC Short Range Cable and 4-pin Mini Quick-disconnect Style

76 x 36 x 58 mm

Specifications

Attribute	871P Can Sensor
Load current	300 mA
Operating voltage	10...30V DC
Operating Current	25 mA (off), 55 mA (on)
Voltage drop	≤ 2.5V
Repeatability	≤ 2%
Hysteresis	3...15%
Protection type	False pulse, transient noise, short circuit, overload, and reverse polarity
Enclosure type rating	NEMA 1, 3, 4, 4X, 6, 6P, 12, 13; IP67 (IEC 529), 1200 psi (8270 kPa) washdown
Connection type	<ul style="list-style-type: none">A2: 2 m (6.6 ft) shielded PVC jacketed cable, 4-wire, 22 AWG, 1/2 in. NPTN4: 4-pin mini Quick disconnect
Status indicator	Red: Output energized
Operating temperature	-20...+70 °C (0...160 °F)
Housing material	Stainless steel, plastic face
Mounting	Two stainless-steel studs

Product Selection

Style	Container Size	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
							Cable Style	Mini QD Style
Short range	202...401	Steel: 19 (0.75), Aluminum: 13 (0.5)	Yes	N.O.	NPN and PNP	35	—	871P-DC19NB76-N4
Long range	202...704	Steel: 29 (1.15), Aluminum: 15 (0.6)					871P-DC29NB140A2	871P-DC29NB140N4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)								889N-F4AFC-6F

Approximate Dimensions

Dimensions shown in mm (in.).

Figure 145. Cable Style


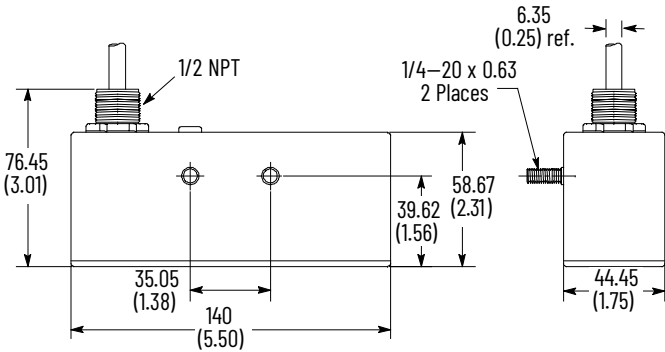


Figure 146. Mini QD Style

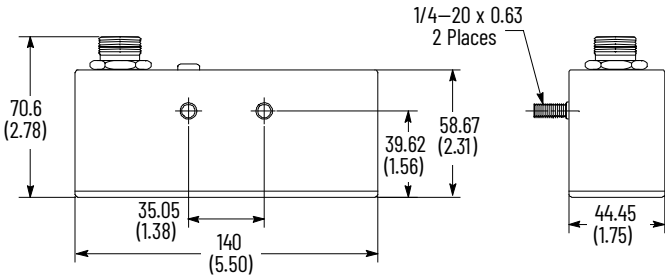

Wiring Diagrams

IMPORTANT: Red and black wires must be connected for proper operation.

Figure 147. Cable Style


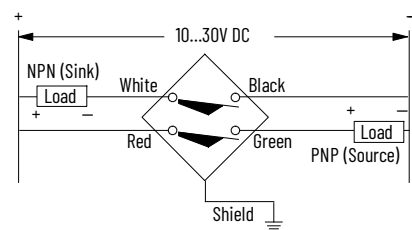



Figure 148. Mini QD Style

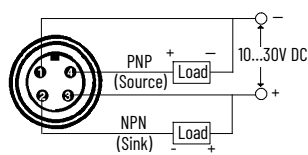

871P 4-wire DC Motion Rectangular Sensors



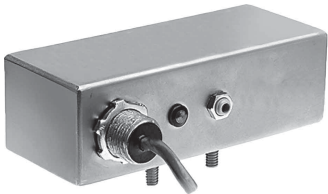871L/872L DC Mini QD Style



871L/872L 4-pin Mini QD 4-pin M12 Micro QD

Specifications

Attribute	871P Can Sensor
Load current	300 mA
Operating voltage	10...30V DC
Operating current	25 mA (off), 55 mA (on)
Voltage drop	≤ 2.5V
Repeatability	≤ 2%
Hysteresis	3...15%
Output time delay	0.5 s after motion stops
Protection type	False pulse, transient noise, short circuit, overload, and reverse polarity
Enclosure type rating	NEMA 1, 3, 4, 4X, 6, 6P, 12, 13; IP67 (IEC 529), 1200 psi (8270 kPa) washdown
Connection type	<ul style="list-style-type: none">A2: 2 m (6.6 ft) shielded PVC jacketed cable, 4-wire, 22 AWG, 1/2 in. NPTN4: 4-pin mini quick disconnectD4: 4-pin micro quick disconnect
Status indicator	<ul style="list-style-type: none">Red: Output energizedDim blink: Cans movingBright steady: No motion
Sensitivity adjustment	Sensing range adjust
Operating temperature	-20...+70 °C (0...160 °F)
Housing material	Stainless steel, plastic face
Mounting	Two stainless-steel studs

Product Selection

Container Size	Nominal Presence Sensing Distance [mm (in.)]	Nominal Motion Sensing Distance [mm (in.)]	Shielded	Output Configuration		Cat. No.		
						Cable Style	Mini QD Style	M12 Micro QD Style
202...704	Steel: 29 (1.15), Aluminum: 15 (0.6)	Steel: 19 (0.75), Aluminum: 13 (0.5)	Yes	N.O.	NPN and PNP	871P-DD29NB140A2	871P-DD29NB140N4	871P-DD29NB140D4
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)							889N-F4AFC-6F	889D-F4AC-2

Approximate Dimensions

Dimensions shown in mm (in.).

Figure 149. Cable Style



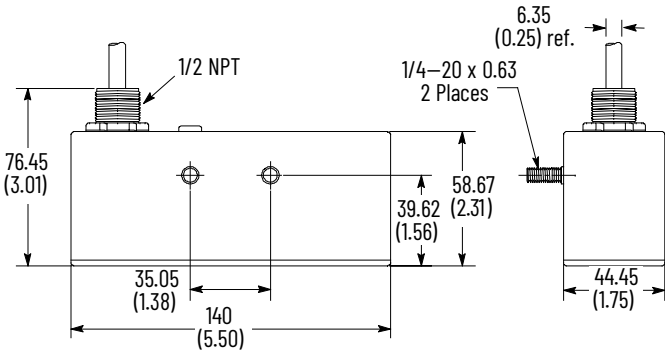


Figure 150. Mini and M12 Micro QD Style

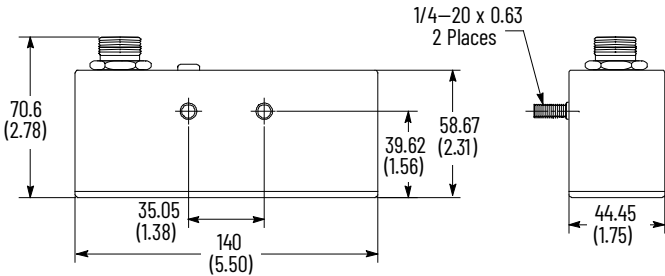


Wiring Diagrams

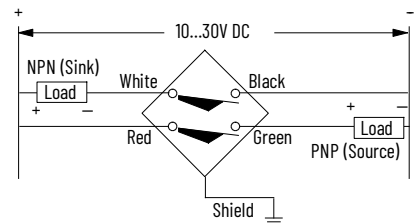Figure 151. Cable Style



IMPORTANT: Red and black wires must be connected for proper operation.

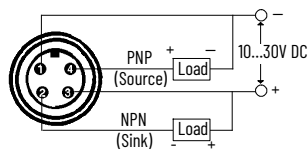Figure 152. Mini and M12 Micro QD Style



871P VersaCube 3-wire DC General-purpose Rectangular Sensors



871P DC M12 Micro Quick Disconnect Style



871P DC Mini Quick Disconnect Style

Specifications

Attribute	871P VersaCube® (General-purpose, 3-wire)
Load current	≤ 200 mA
Leakage current	≤ 10 µA
Operating voltage	10...60V DC
Voltage drop	< 2.5V at 200 mA
Repeatability	≤ 5%
Hysteresis	5% typical
Protection type	False pulse, transient noise, short circuit, overload, and reverse polarity
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6, 6P, 12, 13; IP67 (IEC 529), 1200 psi (8270 kPa) washdown; M12 micro connector versions also meet IP69K (IEC 529)
Housing material	<ul style="list-style-type: none">Body: PlasticBase: Zinc
Connection type	Quick disconnect: 4-pin mini style, 4-pin M12 micro style
Status indicators	<ul style="list-style-type: none">Orange: Output energizedGreen: Power
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection


Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						Mini QD Style	M12 Micro QD Style
40 (1.57)	20 (0.79)	Yes	N.O.	PNP	100	871P-D20NP40-N4	871P-D20NP40-D4
				NPN		871P-D20NN40-N4	871P-D20NN40-D4
			N.C.	PNP		871P-D20CP40-N4	871P-D20CP40-D4
				NPN		871P-D20CN40-N4	871P-D20CN40-D4
	40 (1.57)	No	N.O.	PNP		871P-D40NP40-N4 41	871P-D40NP40-D4 41
				NPN		871P-D40NN40-N4 41	871P-D40NN40-D4 41
			N.C.	PNP		871P-D40CP40-N4 41	871P-D40CP40-D4 41
				NPN		871P-D40CN40-N4 41	871P-D40CN40-D4 41
	Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)					889N-F4AFC-6F	889D-F4AC-2

41. Proper operating distance for unshielded models is 0...33 mm (0...1.3 in.).

Approximate Dimensions


Dimensions shown in mm (in.).

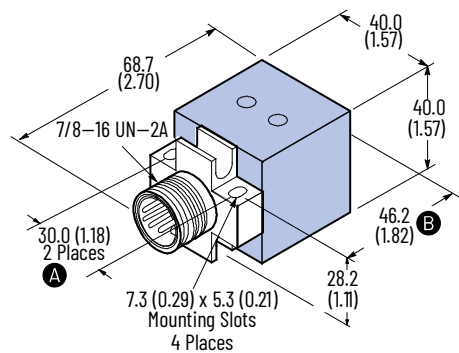Figure 153. Mini QD Style



Item	Description
A	With a retrofit adapter, the spacing between mounting holes becomes 20 (0.79).
B	With a retrofit adapter, the distance from face to mounting holes becomes 60 (2.36).

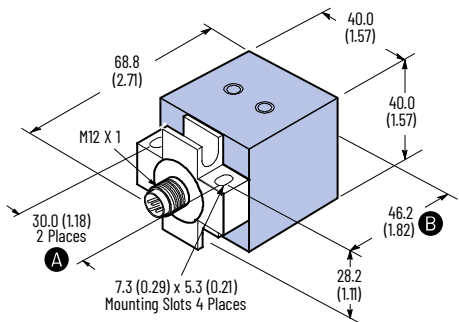Figure 154. M12 Micro QD Style



Item	Description
A	With a retrofit adapter, the spacing between mounting holes becomes 20 (0.79).
B	With a retrofit adapter, the distance from face to mounting holes becomes 60 (2.36).

Wiring Diagrams

Table 94. Mini QD Style





Normally Open (N.O.) or Normally Closed (N.C.)	
NPN (Sinking)	PNP (Sourcing)
	

Table 95. M12 Micro QD Style

Normally Open (N.O.) or Normally Closed (N.C.)	
NPN (Sinking)	PNP (Sourcing)
	



ATTENTION: Unit must be mounted to a grounded metal frame or grounded via field wiring lug per NEC requirements. Recommended grounding lug is included with the mounting kit (catalog number 871A-PKIT).

871P VersaCube 3-wire DC Weld Field Immune and ToughCoat Finish Rectangular Sensors



871P DC M12 Micro Quick Disconnect Style



871P DC Mini Quick Disconnect Style

Specifications

Attribute	871P VersaCube (Weld Field Immune and ToughCoat Finish, 3-wire)
Load current	≤ 200 mA
Leakage current	≤ 10 µA
Operating voltage	10...60V DC
Voltage drop	< 2.5V at 200 mA
Repeatability	≤ 10% of effective operating distance
Hysteresis	12% typical
Protection type	False pulse, transient noise, short circuit, overload, and reverse polarity
Weld field immunity	1000 Gauss
Certifications	UL Listed, cUL Certified, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6, 6P, 12, 13; IP67 (IEC 529), 1200 psi (8270 kPa) washdown; M12 micro connector versions also meet IP69K (IEC 529)
Housing material	Plastic body, zinc base
Connection type	Quick disconnect: 4-pin mini style, 4-pin M12 micro style
Status indicators	<ul style="list-style-type: none">Orange: Output energizedGreen: Power
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection

Head Size [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration		Switching Frequency [Hz]	Cat. No.	
						Mini QD Style	M12 Micro QD Style
40 (1.57)	15 (0.59)	Yes	N.O.	PNP	50	871P-DW15NP40-N4	871P-DW15NP40-D4
				NPN		871P-DW15NN40-N4	871P-DW15NN40-D4
			N.C.	PNP		871P-DW15CP40-N4	871P-DW15CP40-D4
				NPN		871P-DW15CN40-N4	871P-DW15CN40-D4
	20 (0.79)	Yes	N.O.	PNP	50	—	871P-DW20NP40-D4
	25 (0.98)	No	N.O.	PNP	50	871P-DW25NP40-N4	871P-DW25NP40-D4
				NPN		871P-DW25NN40-N4	871P-DW25NN40-D4
			N.C.	PNP		871P-DW25CP40-N4	871P-DW25CP40-D4
				NPN		871P-DW25CN40-N4	871P-DW25CN40-D4
	15 (0.59)	Yes	N.O.	PNP	50	—	871P-DV15NP40-D4(1)
	20 (0.79)	Yes				—	871P-DV20NP40-D4 42
	25 (0.98)	No				—	871P-DV25NP40-D4 42
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)						889N-F4AFC-6F	889D-F4AC-2


IMPORTANT: 871P VersaCube® sensors are offered with ToughCoat Finish on the sensor face. This finish is a proprietary epoxy-based material that resists the adhesion and accumulation of weld-slag particles, which helps improve and extend sensor performance.

42. Weld field immune only with ToughCoat Finish

Approximate Dimensions


Dimensions shown in mm (in.).

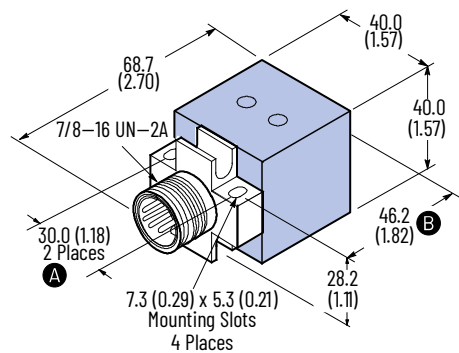Figure 155. Mini QD Style



Item	Description
A	With a retrofit adapter, the spacing between mounting holes becomes 20 (0.79).
B	With a retrofit adapter, the distance from face to mounting holes becomes 60 (2.36).

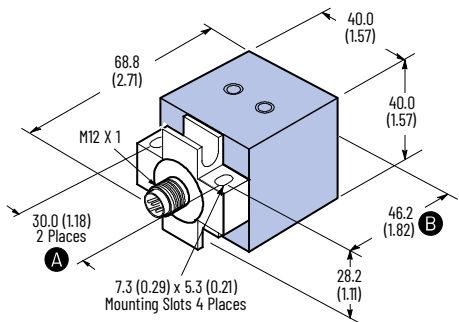Figure 156. M12 Micro QD Style



Item	Description
A	With a retrofit adapter, the spacing between mounting holes becomes 20 (0.79).
B	With a retrofit adapter, the distance from face to mounting holes becomes 60 (2.36).

Wiring Diagrams

Table 96. Mini QD Style





Normally Open (N.O.) or Normally Closed (N.C.)	
NPN (Sinking)	PNP (Sourcing)
	

Table 97. M12 Micro QD Style

Normally Open (N.O.) or Normally Closed (N.C.)	
NPN (Sinking)	PNP (Sourcing)
	



ATTENTION: Unit must be mounted to a grounded metal frame or grounded via field wiring lug per NEC requirements. Recommended grounding lug is included with the mounting kit (catalog number 871A-PKIT).

871P VersaCube 4-wire DC Rectangular Sensors

		
871P DC M12 Micro Quick Disconnect Style (Standard Zinc Bracket and Plastic Base)	871P DC M12 Micro DC Quick Disconnect Style (Optional Stainless-steel Mounting L-Bracket)	871P DC M12 Micro DC Quick Disconnect Style (Standard Zinc Bracket and Heavy-duty Metal Base)

Specifications

Attribute	871P VersaCube (General-purpose, 4-wire)
Load current	≤ 200 mA from -25...+50 °C (-13...+122 °F) ≤ 100 mA from 50...70 °C (122...158 °F)
Leakage current	≤ 10 µA
Operating voltage	10...30V DC
Voltage drop	< 2.5V at 200 mA
Repeatability	≤ 10%
Hysteresis	10% typical
Protection type	False pulse, transient noise, short circuit, overload, and reverse polarity
Weld field immunity	1000 Gauss
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6, 6P, 12, 13; IP67 (IEC 529), IP68, IP69k, 1200 psi (8270 kPa) washdown; Plastic body, zinc bracket, optional stainless-steel L-bracket
Factor-1 equal sensing	Yes
Connection type	Quick disconnect: 4-pin M12 micro style
Status indicators	<ul style="list-style-type: none">Power: GreenOutput that is energized: AmberMargin indication: Amber flashing (target within 80...100% of operating distance)Short circuit or overload: Green and amber flashing
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Product Selection

IMPORTANT: The 871P VersaCube® sensor is offered with ToughCoat Finish™ on the sensor face. This finish is a proprietary epoxy-based material that resists the adhesion and accumulation of weld-slag particles, which improves and extends sensor performance.

Head Size [mm (in.)]	Weld Field Immune	Nominal Sensing Distance [mm (in.)]	Shielded	Output	M12 Micro QD Cat. No.		
					With Standard Zinc Mounting Bracket and Plastic Base	Mounting Bracket Not Included	With Standard Zinc Mounting Bracket and Heavy-duty Metal Base
40 (1.57)	Yes	20 (0.79)	Yes	PNP	871P-D20BP40-D4	871P-D20BP40X-D4	871P-DP20BP40-D4
				NPN	871P-D20BN40-D4	871P-D20BN40X-D4	—
	Yes	40 (1.57)	No	PNP	871P-D40BP40-D4	871P-D40BP40X-D4	871P-DP40BP40-D4
				NPN	871P-D40BN40-D4	871P-D40BN40X-D4	—
	Yes, with ToughCoat Finish	20 (0.79)	Yes	PNP	871P-DV20BP40-D4	871P-DV20BP40X-D4	871P-DPV20BP40-D4
		40 (1.57)	No	PNP	871P-DV40BP40-D4	871P-DV40BP40X-D4	871P-DPV40BP40-D4

Table 98. Mounting Accessories

Description	Cat. No.
Standard zinc mounting bracket	871A-PBR
Stainless steel mounting L-bracket and 22 mm plastic mounting nut	871A-BRS59
Plastic mounting nut, 22 mm	871T-N9

Approximate Dimensions

Dimensions shown in mm (in.).

Figure 157. Zinc Bracket

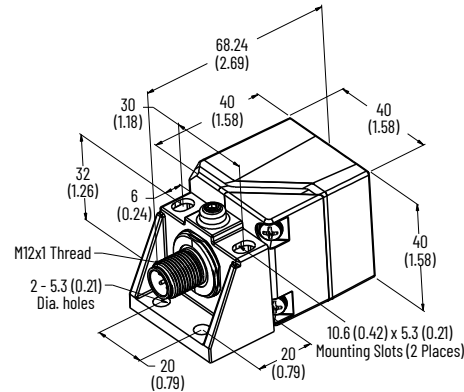


Figure 158. L Bracket


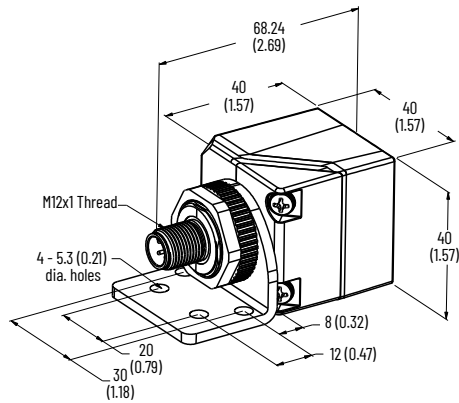


Figure 159. No Bracket

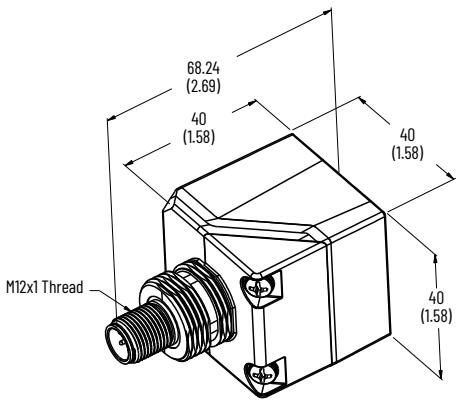

Wiring Diagrams

Table 99. M12 Micro QD Style

Complementary Normally Open (N.O.) or Normally Closed (N.C.)

NPN (Sinking)	PNP (Sourcing)

871P VersaCube 2-wire AC/DC Rectangular Sensors



871P AC/DC Micro Quick Disconnect Style

Specifications

Attribute	871P VersaCube (General-purpose, 2-wire)
Load current	2...100 mA
Inrush current	≤ 2 A
Leakage current	≤ 1.5 mA at 20V, ≤ 1.7 mA at 120V, ≤ 2 mA at 250V
Operating voltage	20...250V AC/DC
Voltage drop	< 10V
Repeatability	≤ 10% of effective operating distance
Hysteresis	12% typical
Protection type	False pulse, transient noise, short circuit, and overload
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 1, 2, 3, 4, 6, 6P, 12, 13; IP67 (IEC 529), 1200 psi (8270 kPa) washdown; micro connector versions also meet IP69K (IEC 529)
Housing material	Plastic body, zinc base
Connection type	Quick Disconnect: 3-pin mini style, 3-pin AC micro style
Status indicators	<ul style="list-style-type: none">Red: Output energizedGreen: Power (short circuit if flashing)
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Correction Factors

Target Material	Correction Factor
Steel	1.0
Stainless steel	0.7...0.8
Brass	0.4...0.5
Aluminum	0.3...0.4
Copper	0.2...0.3

Product Selection


Head Size [mm (in.)]	Weld Field Immune	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.	
						Mini QD Style	AC Micro QD Style
40 (1.57)	No	20 (0.79)	Yes	N.O.	30	871P-B20N40-N3	871P-B20N40-R3
				N.C.		871P-B20C40-N3	871P-B20C40-R3
		40 (1.57)	No	N.O.	20	871P-B40N40-N3 43	871P-B40N40-R3 43
				N.C.		871P-B40C40-N3 43	871P-B40C40-R3 43
	Yes	15 (0.59)	Yes	N.O.	30	871P-BW15N40-N3	871P-BW15N40-R3
				N.C.		871P-BW15C40-N3	871P-BW15C40-R3
		25 (0.98)	No	N.O.	20	871P-BW25N40-N3	871P-BW25N40-R3
				N.C.		871P-BW25C40-N3	871P-BW25C40-R3
		Recommended standard QD cordset (-6F = 1.8 m [6 ft], -2 = 2 m [6.5 ft])					889N-F3AFC-6F

43. Proper operating distance for unshielded models is 0...33 mm (0...1.3 in.).

Approximate Dimensions


Dimensions shown in mm (in.).

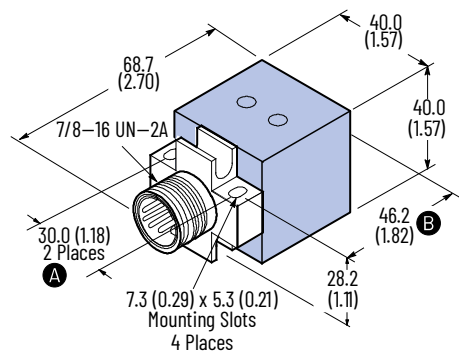Figure 160. Mini QD Style



Item	Description
A	With a retrofit adapter, the spacing between mounting holes becomes 20 (0.79).
B	With a retrofit adapter, the distance from face to mounting holes becomes 60 (2.36).

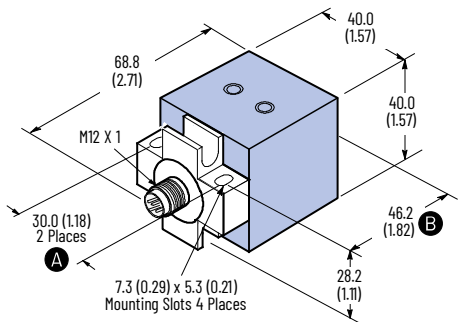Figure 161. AC Micro QD Style




Item	Description
A	With a retrofit adapter, the spacing between mounting holes becomes 20 (0.79).
B	With a retrofit adapter, the distance from face to mounting holes becomes 60 (2.36).

Wiring Diagrams




ATTENTION: Unit must be mounted to a grounded metal frame or grounded via field wiring lug per NEC requirements. Recommended grounding lug is included with the mounting kit (catalog number 871A-PKIT).

Figure 162. Mini QD Style



IMPORTANT: Load can be switched to Pin 3.

Figure 163. Micro QD Style



IMPORTANT: Load can be switched to Pin 2.

Cylinder Sensors

871D 2-wire AC/DC Cylinder Sensors



871D Cylinder Sensor

Specifications

Attribute	871D Cylinder Position Inductive Style
Outputs	Normally open
Load current	8...300 mA
Inrush current (one cycle)	<3 A (t < 20 ms)
Leakage current	<1.7 mA
Operating voltage	<ul style="list-style-type: none">20...250V AC/DC20... 300 V DC
Voltage drop	≤7V
Switching frequency	20 Hz
Repeatability	5% typical
Hysteresis	15% typical
Protection type	Short circuit and reverse polarity
Weld field immunity	<ul style="list-style-type: none">250 mT AC fields100 mT DC fields
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	IP67 (IEC 529)
Connection type	Quick Disconnect: 3-pin mini style, 3-pin micro style
Status indicator	<ul style="list-style-type: none">Green: PowerRed: OutputRed/Green: Short circuit/overload

Inductive Proximity Sensor Specifications

Attribute	871D Cylinder Position Inductive Style
Operating temperature	-25...+70 °C (-13...+158 °F)
Material	<ul style="list-style-type: none">Housing: ZincProbe Material: Aluminum

Product Selection


Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Probe Length [mm (in.)]	Cat. No.	
					Mini QD Style	Micro QD Style
12 (0.47)	2 (0.08)	Yes	N.O.	26.0 (1.025)	871D-LW2N260-N3	871D-LW2N260-R3
				31.7 (1.250)	871D-LW2N317-N3	871D-LW2N317-R3
				52.4 (2.062)	871D-LW2N524-N3	871D-LW2N524-R3
				73.0 (2.875)	871D-LW2N730-N3	—
				115.9 (4.560)	871D-LW2N1159-N3	—
Recommended standard QD cordset (-6F = 1.8 m [6 ft], -2 = 2 m [6.5 ft])					889N-F3AFC-6F	889R-F3ECA-2

Approximate Dimensions

Dimensions shown in mm (in.).


IMPORTANT: Units supplied with two, self-locking 1/4 in.-20 socket head cap screws. Recommended tightening torque: 16.95 N•m (150 in•lb).

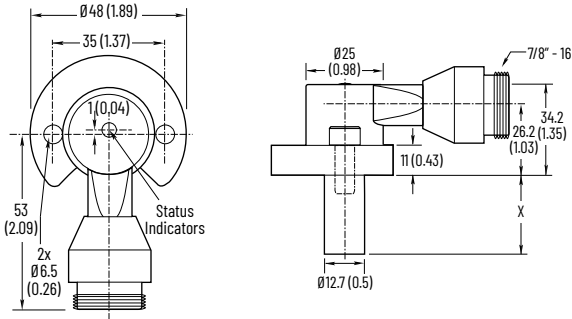Figure 164. Mini QD Style



X = Probe length varies by catalog number. See rockwellautomation.com/en-us/products/hardware/allen-bradley/sensors-and-switches/presence-sensors/inductive-proximity-sensors/cylinder-inductive-proximity-sensors/871d-hydraulic-positioning.html.

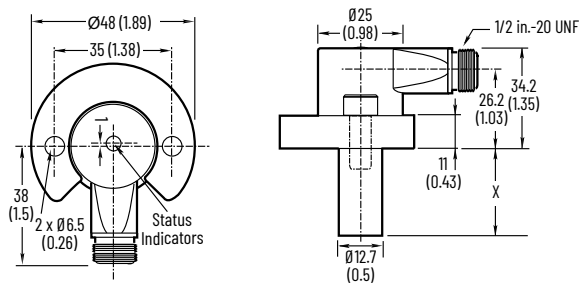Figure 165. M12 Micro QD Style



X = Probe length varies by catalog number. See rockwellautomation.com/en-us/products/hardware/allen-bradley/sensors-and-switches/presence-sensors/inductive-proximity-sensors/cylinder-inductive-proximity-sensors/871d-hydraulic-positioning.html.

Wiring Diagrams

Figure 166. Mini QD Style – Normally Open


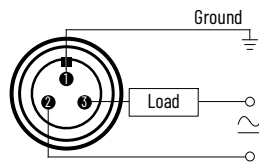


Figure 167. M12 Micro QD Style – Normally Open



871D 4-wire DC Cylinder Sensors



871D Cylinder Sensor

Specifications

Attribute	871D Cylinder Position Inductive Style
Outputs	Normally open
Load current, max	< 200 mA
Leakage current	≤ 100 µA
No-load supply current	≤ 35 mA
Operating voltage	10...30V DC
Voltage drop	≤ 2V DC
Switching frequency	30 Hz
Hysteresis	15% typical
Protection type	Reverse polarity and short circuit
Weld field immunity	250 mT AC fields, 100 mT DC fields
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	IP67 (IEC 529)
Connection type	Quick Disconnect: 4-pin M12 micro style
Status indicator	<ul style="list-style-type: none">Green: PowerOrange: Output
Operating temperature	-25...+70 °C (-13...+158 °F)
Pressure	3000 psi
Material	<ul style="list-style-type: none">Housing: ZincProbe: Aluminum

Product Selection


Barrel Diameter [mm (in.)]	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Probe Length [mm (in.)]	Cat. No.
					Micro QD Style
12 (0.47)	2 (0.08)	Yes	N.O. PNP/NPN	26.0 (1.025)	871D-MW2NP260-D4
				31.7 (1.250)	871D-MW2NP317-D4
				52.4 (2.062)	871D-MW2NP524-D4
				73.0 (2.875)	871D-MW2NP730-D4
Recommended standard QD cordset (-6F = 1.8 m [6 ft], -2 = 2 m [6.5 ft])					889D-F4AC-2

Approximate Dimensions

Dimensions shown in mm (in.).

IMPORTANT: Units supplied with two, self-locking 1/4 in.-20 socket head cap screws. Recommended tightening torque: 16.95 N•m (150 in•lb).

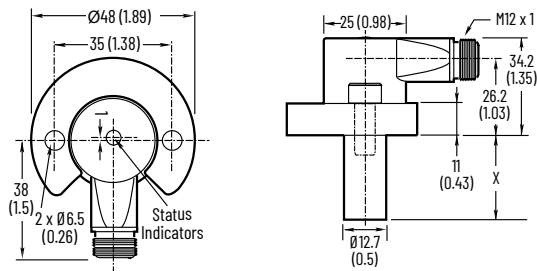
Figure 168. M12 Micro QD Style



X = Probe length varies by catalog number. See rockwellautomation.com/en-us/products/hardware/allen-bradley/sensors-and-switches/presence-sensors/inductive-proximity-sensors/cylinder-inductive-proximity-sensors/871d-hydraulic-positioning.html.

Wiring Diagrams

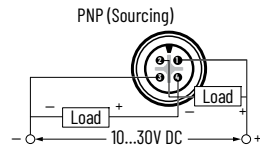Figure 169. M12 Micro QD Style – Normally Open



871D DC WorldClamp Cylinder Sensors

<p>871D DC M12 Micro QD - Small Sensing Coil (Chicklet)</p> <p>100 mm, 165 mm, and 200 mm</p>	<p>871D DC M12 Micro QD - Large Sensing Coil (Chicklet)</p> <p>100 mm, 165 mm, and 200 mm</p>	<p>871D DC M12 Micro QD - Cylindrical Sensing Coil (Chicklet)</p> <p>100 mm</p>
---	---	---

Specifications

Attribute	871D WorldClamp Cylinder Sensor (Power Clamp and Gripper Style)
Load current	150 mA, max
Leakage current	< 10 µA
Operating voltage	10...30V DC
Voltage drop	< 2.5V
Repeatability	< 2%
Hysteresis	5% typical
Protection type	False pulse, transient noise, short circuit, and overload
Weld field immunity	1600 Gauss
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	IP67
Connection type	4-pin M12 micro quick disconnect
Status indicator	<ul style="list-style-type: none">Green: PowerOrange: S1 outputRed: S2 output
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Product Selection

Barrel Diameter [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Lead Length [mm (in.)]	Chicklet Size	Cat. No.
2 (0.08)	Yes	2 N.O. PNP outputs	15	100 (3.94)	Large	871D-MW2GP100A-D4
					Small	871D-MW2GP100B-D4
					Cylindrical	871D-MW2GP100C-D4
				165 (6.5)	Large	871D-MW2GP165A-D4
					Small	871D-MW2GP165B-D4
				S1/S2: 200 (7.88)	Large	871D-MW2GP200A-D4
					Small	871D-MW2GP200B-D4
				S1: 40 (1.57)/ S2: 100 (3.94)	Large	871D-MW2GP40A-D4 44
					Small	871D-MW2GP40B-D4 44
Recommended cordset: 2 m (6.5 ft) 4-pin DC micro (straight)						889D-F4AC-2

Approximate Dimensions

Dimensions shown in mm (in.).

Table 100. Sensor






Front View	Side View
	


Table 101. Sensing Coil (Chicklet)

Large	Small	Cylindrical
		


44. Special length of cable leads, one is 40 mm (1.57 in.) and the second is 100 mm (3.94).

Wiring Diagrams

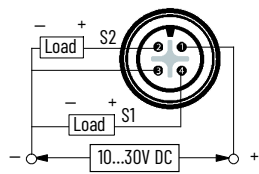Figure 170. Normally Open – PNP (Sourcing)



871D AC/DC WorldClamp Cylinder Sensors

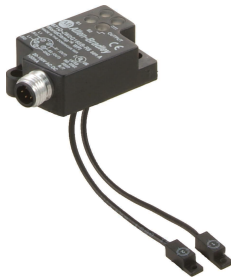

871D AC Micro QD - Small Sensing Coil (Chicklet)
100 mm, 165 mm, and 200 mm



871D AC Micro QD - Large Sensing Coil (Chicklet)
100 mm, 165 mm, and 200 mm

Specifications

Attribute	871D WorldClamp Cylinder Sensor (Power Clamp and Gripper Style)
Load current	100 mA, max
Inrush current	≤ 2 A (one cycle)
Leakage current	< 1.7 mA
Operating voltage	20...150V AC/DC
Voltage drop	< 10V
Repeatability	< 2%
Hysteresis	5% typical
Protection type	False pulse, transient noise, short circuit, and overload
Weld field immunity	1600 Gauss
Certifications	cULus Listed, CE Marked for all applicable directives, and UKCA Marked for all applicable regulations
Enclosure type rating	IP67
Connection type	5-pin AC micro quick disconnect
Status indicator	<ul style="list-style-type: none">Two green: power S1 and S2Orange: S1 outputRed: S2 output
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	30 g (1.06 oz), 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes



Product Selection

Sensor Type	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Lead Length [mm (in.)]	Chicklet Size	Cat. No.
Standard	2 (0.08)	Yes	2 N.O. Outputs	20	100 (3.94)	Large	871D-JW2G100A-R5
						Small	871D-JW2G100B-R5
					165 (6.5)	Large	871D-JW2G165A-R5
						Small	871D-JW2G165B-R5
					200 (7.88)	Large	871D-JW2G200A-R5
						Small	871D-JW2G200B-R5
					S1: 40 (1.57) S2: 100 (3.94)	Large	871D-JW2G40A-R5 45
						Small	871D-JW2G40B-R5 45
Recommended standard QD cordset: -2 = 2 m (6.5 ft)							889R-F5AEA-2

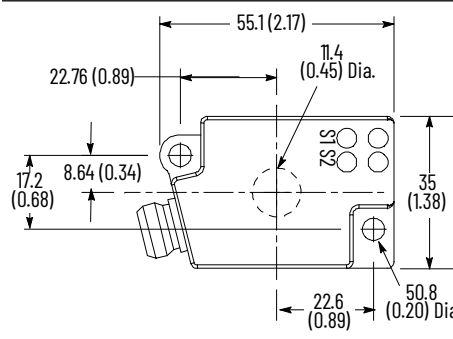Approximate Dimensions



Dimensions shown in mm (in.).

Table 102. Sensor

Front View	Side View
	


45. Special length of cable leads, one is 40 mm (1.57 in.) and the second is 100 mm (3.94).

Table 103. Sensing Coil (Chicklet)

Large	Small
	

Wiring Diagrams

Figure 171. Normally Open



Ring Sensors

871R 3-wire DC Ring Sensors



871R DC Cable Style 20 mm

Specifications

Attribute	871R Ring Style Sensor
Load current	≤ 200 mA
Leakage current	≤ 10 µA
Operating voltage	10...30V DC
Voltage drop	≤ 2.4V
Repeatability	≤ 2%
Hysteresis	10% typical
Protection type	Reverse polarity, transient noise, short circuit, overload, and false pulse
Certifications	CE Marked for all applicable directives and UKCA Marked for all applicable regulations
Enclosure type rating	NEMA 4, IP67 (IEC 529)
Connection type	<ul style="list-style-type: none">Cable: 2 m (6.6 ft.) length 3-conductor 26 AWG PVCQuick disconnect: 4-pin M12 micro style
Status indicators	Red: Output energized
Operating temperature	-25...+70 °C (-13...+158 °F)
Shock	5 g (0.18 oz)
Vibration	10...55 Hz

Product Selection


Table 104. Cable Style

Ring Diameter [mm (in.)]	Minimum Ball Size [mm (in.)]	Output Configuration		Switching Frequency [Hz]	Cat. No.
20 (0.79)	6 (0.24)	N.O.	PNP	1000	871R-D20NP73-E2
Recommended standard QD cordset: -6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft)					889D-F4AC-2

Approximate Dimensions


Dimensions shown in mm (in.).

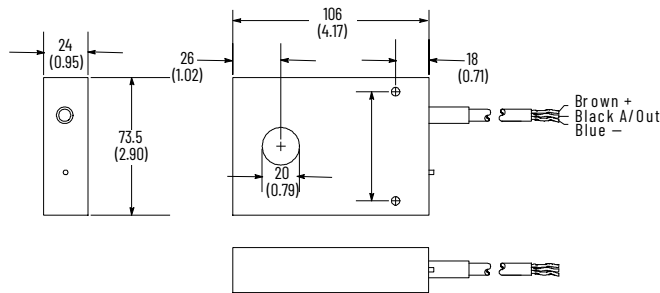Figure 172. Cable Style



Wiring Diagrams

Figure 173. Cable Style – Normally Open



Accessories

A large variety of accessories are available for use with our products for convenient mounting and application of proximity sensors.

Banking Screw Adapters

Banking screw adapters provide the flexibility to use inductive proximity sensors as mechanical stop switches. These banking screw adapters are designed for use only with shielded sensors. Each banking screw adapter is made of heat treated alloy steel components and comes complete with two mounting nuts.

Standard models require 252 g (9 oz) of force to activate the switch.

IMPORTANT: Models are available requiring more force to activate the switch, contact your local Rockwell Automation sales office or Allen-Bradley distributor for details.

Figure 174. Banking Screw Adapter


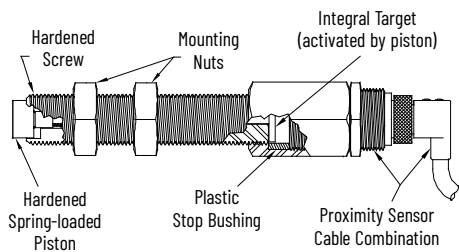



Table 105. Sensors for use with Banking Screw Adapters

Proximity Tube Diameter [mm (in.)]	Sensing Distance [mm (in.)]	Specification	Cat. No.
8 (0.31)	1.5 (0.06)	10...30V DC, N.O., PNP, Micro QD	872C-DX15-D4
12 (0.47)	2 (0.08)		872C-DX34-D4
18 (0.71)	3 (0.12)		872C-DX33-D4
12 (0.47)	1 (0.04)	20...250V AC, N.O., Micro QD	872C-A2N12-R3
18 (0.71)	4 (0.16)		872C-A5N18-R3

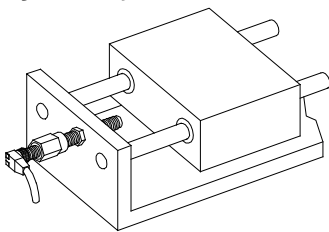Figure 175. Typical Applications



Approximate Dimensions

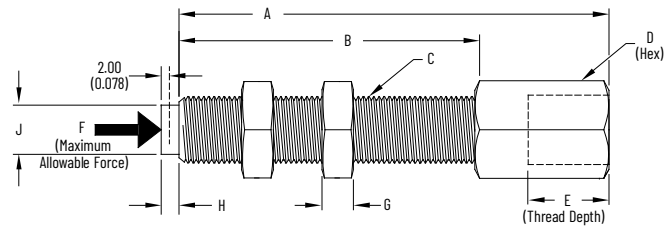


For Use With	Dimensions [mm (in.)]									Cat. No.
	A	B	C	D	E	F	G	H	J	
8 mm shielded sensors	57.2 (2.25)	25 (1)	M8 x 1	11 (0.43)	18.4 (0.72)	2000 N (450 lb)	5.08 (0.2)	2.93 (0.115)	5.84 (0.23)	871A-AK8-25
	82.6 (3.25)	50 (2)								871A-AK8-50
12 mm shielded sensors	57.2 (2.25)	25 (1)	M12 x 1	15.7 (0.62)	17.4 (0.67)	20,500 N (4608 lb)	6.35 (0.25)	4.22 (0.166)	9.40 (0.37)	871A-AK12-25
	82.6 (3.25)	50 (2)								871A-AK12-50
	108 (4.25)	75 (3)								871A-AK12-75
	133 (5.25)	100 (4)								871A-AK12-100
18 mm shielded sensors	57.2 (2.25)	25 (1)	M18 x 1	22.1 (0.87)	22.1 (0.87)	45,000 N (10,115 lb)	6.35 (0.25)	4.22 (0.166)	14.2 (0.56)	871A-AK18-25
	82.6 (3.25)	50 (2)								871A-AK18-50
	108 (4.25)	75 (3)								871A-AK18-75
	133 (5.25)	100 (4)								871A-AK18-100

Conduit Adapters

Conduit adapters allow easy connection of most threaded-barrel models to a conduit line.


Figure 176. 12 mm, 18 mm, and 30 mm



Proximity Tube Diameter [mm (in.)]	Thread Size	Approximate Dimensions [mm (in.)]	Cat. No.
12 (0.47)	M12 x 1		871C-N13
18 (0.71)	M18 x 1		871C-N19
30 (1.18)	M30 x 1.5		871C-N31
12 (0.47)	M12 x 1		871T-N5
18 (0.71)	M18 x 1		871T-N6
30 (1.18)	M30 x 1.5		871T-N7

Rectangular Sensor Mounting Bracket

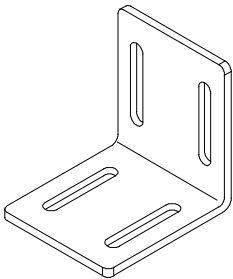
Figure 177. Stainless-steel Mounting Bracket Assembly



Description	Cat. No.
Mounting bracket	871A-BR58

Approximate Dimensions


Figure 178. Dimensions in mm (in.)



Accessories – Tubular Sensors

Spring-return Mounting Brackets

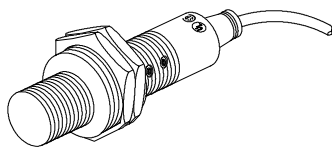Figure 179. 8 mm, 12 mm, 18 mm, and 30 mm




Spring return mounting brackets provide protection for the sensor if a target collision occurs. The bracket is designed to allow the sensor to retract axially when force is applied to its face, then to return to its original position when the force is removed. The bracket is threaded onto a tubular proximity sensor and locked into place by using the mounting nut that is provided with the sensor.

For protection against lateral collisions, the addition of a plastic deflecting cap is recommended (see [Plastic Deflecting Caps for Tubular Proximity Sensors on page 245](#)).

IMPORTANT: Right angle mounting brackets are available for use with these spring return brackets (see [Right-angle Style Mounting Brackets on page 242](#)).

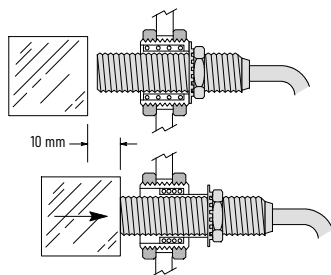
Figure 180. Example



IMPORTANT:

- Any overtravel greater than 10 mm (0.39 in.) or improper installation can damage the sensor and/or mount. Do not exceed the torque specifications that are listed (see the following torque charts) or the mounting sleeve distorts.
 - Use one jam nut, provided with the sensor, to lock the inner sleeve to the sensor body. A bonding agent such as low strength Loctite adhesive is recommended. Tip holes for retaining ring pliers are provided for grasping the inner sleeve.
-

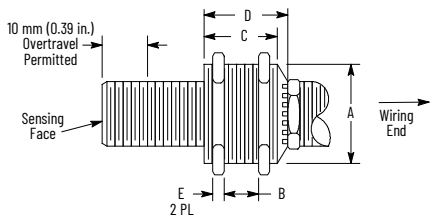Approximate Dimensions



Proximity Tube Diameter [mm (in.)]	Approximate Dimensions mm (in.)						Cat. No.	
	Hole Diameter	A	B	C	D	E	Anodized Aluminum	Stainless Steel
8 (0.31)	15.9 (0.63)	M16 x 1.5	11 (0.43)	19 (0.75)	22 (0.87)	3.5 (0.14)	871A-BXN8	871A-BXS8
12 (0.47)	22.2 (0.88)	M22 x 1.5	11 (0.43)	19 (0.75)	22 (0.87)	4 (0.16)	871A-BXN12	871A-BXS12
12 (0.47)	17.9 (0.7)	M18 x 1	10 (0.4)	19 (0.75)	21.2 (0.84)	4 (0.16)	—	871A-BXS12-LP
18 (0.71)	31 (1.22)	M30 x 1.5	15 (0.59)	26 (1.02)	30 (1.18)	5 (0.2)	871A-BXN18	871A-BXS18
30 (1.18)	47.5 (1.87)	M47 x 1.5	25.4 (1)	35 (1.38)	37.9 (1.49)	5 (0.2)	871A-BXN30	871A-BXS30


Torque Charts

Mounting Nut Torque [N·m (lb·in)] 46	Sensor Nut Torque [N·m (lb·in)] 46	Cat. No.
8.4 (75)	3.3 (30)	871A-BXN8
15.2 (136)	5.5 (50)	871A-BXN12
22 (195)	11.3 (100)	871A-BXN18

46. For metal housing with the use of supplied hardware.

Quick-change Mounting Brackets


Figure 181. 8 mm, 12 mm, 18 mm, and 30 mm




Quick-change sensor brackets allow you to install or remove shielded proximity sensors quickly and easily. Quick sensor change-out is achieved with one collet-style locknut, while maintaining the original sensing distance setup, and thus minimizes time-consuming readjustments. Each quick-change sensor bracket is made of zinc-plated brass components and comes complete with two mounting nuts.

ATTENTION: Not for use with ferrous selective proximity sensors.

Typical Application



Approximate Dimensions




Sensor Diameter [mm (in.)]	Approximate Dimensions [mm (in.)]						Cat. No. 47
	A	B	C	D	E	F	
8 (0.31)	8 (0.31)	32 (1.25)	18 (0.71)	M12 x 1	3.05 (0.12)	17.4 (0.68)	871A-BQN8
		48 (1.89)	34 (1.34)				871A-BQN8-L
12 (0.47)	12 (0.47)	34 (1.34)	20 (0.79)	M16 x 1	3.30 (0.13)	22.2 (0.88)	871A-BQN12
		44 (1.73)	30 (1.18)				871A-BQN12-L

47. Each spring-return mounting bracket is supplied with two mounting nuts.

Sensor Diameter [mm (in.)]	Approximate Dimensions [mm (in.)]						Cat. No. 47
	A	B	C	D	E	F	
18 (0.71)	18 (0.71)	38 (1.5)	20 (0.79)	M24 x 1.5	5.08 (0.2)	30.2 (1.19)	871A-BQN18
		58 (2.28)	40 (1.57)				871A-BQN18-L
30 (1.18)	30 (1.18)	38 (1.5)	20 (0.79)	M36 x 1.5	5.84 (0.23)	41.3 (1.63)	871A-BQN30
		58 (2.28)	40 (1.57)				871A-BQN30-L


Snap-clamp Mounting Brackets

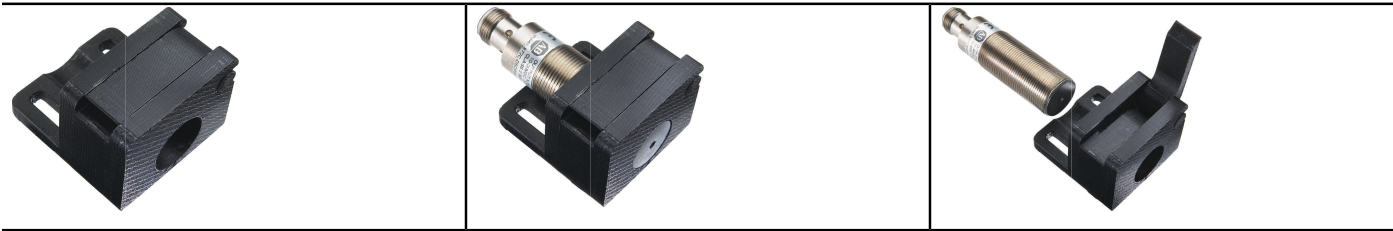Table 106. 8 mm, 12 mm, 18 mm, and 30 mm



The snap-clamp style mounting bracket for tubular inductive proximity sensors provides simplified, tool-free installation for 12 mm and 18 mm barrel diameters. This plastic bracket allows fast, simple installation and removal of the sensor, and is ideal for general-purpose applications.

Approximate Dimensions




Sensor Diameter [mm (in.)]	Approximate Dimensions [mm (in.)]							Cat. No.
	A	B	C	D	E	F	G	
12 (0.47)	25.3 (0.99)	22.1 (0.87)	39.9 (1.57)	35.5 (1.4)	22 (0.87)	8.1 (0.32)	12 (0.47)	871A-SCBP12
18 (0.71)	30.5 (1.2)	22.9 (0.9)	42.9 (1.69)	39.6 (1.56)	26 (1.02)	11.2 (0.44)	18 (0.71)	871A-SCBP18

47. Each spring-return mounting bracket is supplied with two mounting nuts.

Swivel/tilt Style Mounting Brackets

The swivel/tilt mounting bracket provides both axial and 10° tilt adjustment for our 18 mm and 30 mm tubular-style products.

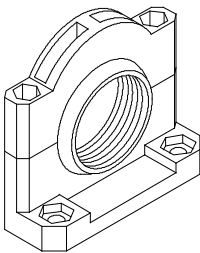
Figure 182. 18 mm and 30 mm



Description	Cat. No. 48
30 mm mounting bracket	60-2439
18 mm mounting bracket	60-2649

Approximate Dimensions

Figure 183. Dimensions in mm (in.)



48. Each swivel/tilt mounting bracket is supplied with two screws and two locking nuts.


Right-angle Style Mounting Brackets

Right-angle style brackets are designed for convenient mounting and adjustable positioning of tubular-style proximity sensors.

Proximity Tube Diameter [mm (in.)]	Approximate Dimensions [mm (in.)] (1)	Housing Material	Cat. No.
8 (0.31)		Zinc-plated steel	871A-BRN8
		Stainless steel	871A-BRS8
12 (0.47)		Zinc-plated steel	871A-BRN12
		Stainless steel	871A-BRS12
18 (0.71) (for use with Cat. No. 871A-BXN8 or 871A-BXS8 spring return brackets)		Zinc-plated steel	871A-BRN18
		Stainless steel	871A-BRS18
22 (0.87) (for use with Cat. No. 871A-BXN12 or 871A-BXS12 spring return brackets)		Zinc-plated steel	871A-BRN22
		Stainless steel	871A-BRS22
30 (1.18) (for use with Cat. No. 871A-BXN18 or 871A-BXS18 spring return brackets)		Zinc-plated steel	871A-BRN30
		Stainless steel	871A-BRS30
47 (1.85) (for use with Cat. No. 871A-BXN30 or 871A-BXS30 spring return brackets)		Zinc-plated steel	871A-BRN47
		Stainless steel	871A-BRS47


Clamp Style Mounting Brackets

Figure 184. 5 mm, 6.5 mm, 8 mm, 12 mm, 18 mm, 30 mm, and 34 mm



Our clamp style brackets are designed for convenient mounting and adjustable positioning of tubular-style proximity sensors. They include stainless-steel mounting hardware and chemical-resistant material for harsh environment

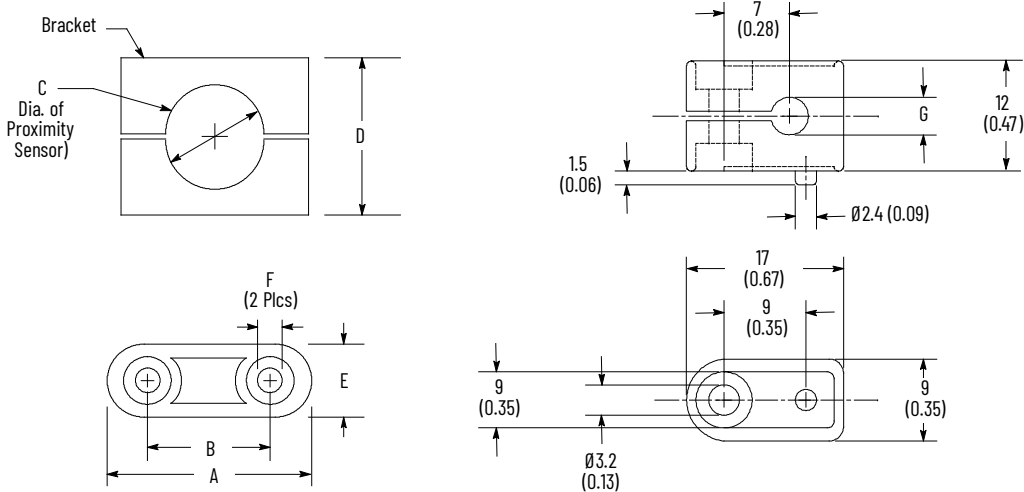
Approximate Dimensions



Sensor Diameter [mm (in.)]	Approximate Dimensions [mm (in.)]							Cat. No.
	A	B	C	D	E	F	G	
4 (0.16)	—	—	—	—	—	—	4 (0.16)	871A-BP4
5 (0.2)	—	—	—	—	—	—	5 (0.2)	871A-BP5
6.5 (0.26)	—	—	—	—	—	—	6.5 (0.26)	871A-BP7
8 (0.31)	29 (1.14)	18 (0.708)	8 (0.31)	18.3 (0.72)	11 (0.432)	4.4 (0.172)	—	871A-BP8
12 (0.47)	36 (1.42)	24 (0.944)	12 (0.47)		12 (0.472)		—	871A-BP12
18 (0.71)	45 (1.772)	32 (1.26)	18 (0.71)	29.4 (1.16)	13 (0.512)	5.4 (0.212)	—	871A-BP18
30 (1.18)	60 (2.4)	45 (1.772)	30 (1.18)	48.4 (1.91)	15.8 (0.624)	5.5 (0.218)	—	871A-BP30
34 (1.34)	65.8 (2.59)	50 (1.97)	34 (1.34)	48.3 (1.9)			—	871A-BP34

PTFE End Caps for Tubular Proximity Sensors

Figure 185. 8 mm, 12 mm, 18 mm, and 30 mm



PTFE end caps protect tubular proximity sensors from abrasion, corrosion, chemical exposure, weld slag, and other debris.

Approximate Dimensions

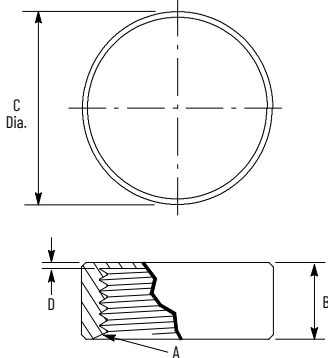


Table 107. Shielded [mm (in.)]


Tube Diameter	A	B	C	D	Cat. No.
8 (0.31)	M8 x 1	5 (0.2)	10.8 (0.43)	0.50 (0.02)	871A-KT8
12 (0.47)	M12 x 1	8.9 (0.35)	14.8 (0.58)	0.89 (0.035)	871A-KT12
18 (0.71)	M18 x 1	8.8 (0.35)	24.4 (0.96)	1.27 (0.05)	871A-KT18
30 (1.18)	M30 x 1.5	10 (0.39)	38.1 (1.5)	2.03 (0.08)	871A-KT30

Table 108. Unshielded [mm (in.)]

Tube Diameter	A	B	C	D	Cat. No.
8 (0.31)	M8 x 1	9.6 (0.38)	10.8 (0.43)	0.50 (0.02)	871A-KUT8
12 (0.47)	M12 x 1	15 (0.6)	14.8 (0.58)	0.89 (0.035)	871A-KUT12
18 (0.71)	M18 x 1	18.8 (0.7)	24.4 (0.96)	1.27 (0.05)	871A-KUT18
30 (1.18)	M30 x 1.5	23 (0.9)	38.1 (1.5)	2.03 (0.08)	871A-KUT30

Plastic Deflecting Caps for Tubular Proximity Sensors

Figure 186. 8 mm, 12 mm, 18 mm, and 30 mm



Plastic deflecting caps are used with spring return brackets when lateral collisions might occur. The cap is threaded onto the front of the proximity sensor. The 30° slope allows the sensor and spring bracket to retract when a lateral collision occurs.

Approximate Dimensions

Dimensions shown in mm (in.).




Table 109. Shielded [mm (in.)]


Tube Diameter	A	B	C	D	E	Cat. No.
8 (0.31)	5.1 (0.2)	15.1 (0.59)	0.25 (0.01)	—	10 (0.39)	871A-KP8
12 (0.47)	6.4 (0.25)	22.9 (0.9)	0.89 (0.04)			871A-KP12
18 (0.71)	8 (0.31)	31.4 (1.34)				871A-KP18
30 (1.18)		44.5 (1.75)			12.7 (0.5)	871A-KP30

Table 110. Unshielded [mm (in.)]

Tube Diameter	A	B	C	D	E	Cat. No.
8 (0.31)	5.1 (0.2)	15.1 (0.59)	0.25 (0.01)	9.51 (0.37)	10 (0.39)	871A-KUT8
12 (0.47)	6.4 (0.25)	22.9 (0.9)	0.89 (0.04)	17.3 (0.68)		871A-KUT12
18 (0.71)	8 (0.31)	31.4 (1.34)				871A-KUT18
30 (1.18)		44.5 (1.75)		20 (0.79)	12.7 (0.5)	871A-KUT30

Mounting Nuts for Tubular Proximity Sensors






Figure 187. 8 mm, 12 mm, 18 mm, and 30 mm



Material	Proximity Tube Diameter [mm (in.)]	Thread Size	Approximate Dimensions [mm (in.)]	Cat. No. 49	
				Nickel-plated	PTFE-coated
Brass	8 (0.31)	M8 x 1		871C-N1	—
	12 (0.47)	M12 x 1		871C-N2	871A-NBT12
	18 (0.71)	M18 x 1		871C-N3	871A-NBT18
	30 (1.18)	M30 x 1.5		871C-N4	871A-NBT30
Stainless steel	12 (0.47)	M12 x 1		871T-N2	

49. Each catalog number includes two mounting nuts.


Inductive Proximity Sensor Specifications

Material	Proximity Tube Diameter [mm (in.)]	Thread Size	Approximate Dimensions [mm (in.)]	Cat. No. 49	
				Nickel-plated	PTFE-coated
	18 (0.71)	M18 x 1		871T-N4	
	30 (1.18)	M30 x 1.5		871T-N8	
Plastic	12 (0.47)	M12 x 1		871T-N1	
	18 (0.71)	M18 x 1		871T-N3	
	30 (1.18)	M30 x 1.5		871C-N5	

49. Each catalog number includes two mounting nuts.

Lock Washers for Tubular Proximity Sensors

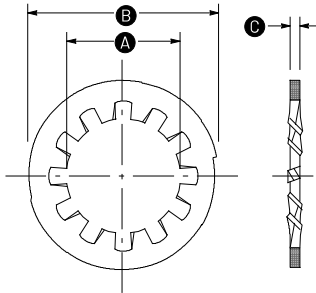Figure 188. 8 mm, 12 mm, 18 mm, and 30 mm



Nominal Washer Size [mm (in.)]	A		B		C		Cat. No. 50
	Inside Diameter [mm (in.)]		Outside Diameter [mm (in.)]		Material Thickness [mm (in.)]		
8 (0.031)	8.5 (0.33)	8.2 (0.32)	15.5 (0.61)	14.75 (0.58)	0.85 (0.03)	0.7 (0.03)	871A-LWN8
12 (0.047)	12.7 (0.5)	12.3 (0.48)	20.25 (0.8)	19.5 (0.77)	1 (0.04)	0.8 (0.03)	871A-LWN12
18 (0.071)	19.1 (0.75)	18.5 (0.73)	29.6 (1.17)	28.6 (1.13)	1.3 (0.051)	1.1 (0.04)	871A-LWN18
30 (1.18)	31.4 (1.24)	30.6 (1.2)	46.3 (1.82)	45.1 (1.78)	1.7 (0.07)	1.5 (0.06)	871A-LWN30

50. Each catalog number includes two lock washers.

Spacer Kits


Spacer kits are available for use with 871D in-port tubular position sensors for nonstandard tubular probe lengths.

Example from the following table: Required sensor probe length is 101.6 mm (4 in.). Using sensor Cat. No. 871D-DW2NP1159-D4 and spacer Cat. No. 871A-S1427 results in a probe length of 101.5 mm (3.998 in.). Any difference between desired probe length and length that results from sensor and spacer combination must be carefully considered to achieve proper clearance in application.

Spacer Height [mm (in.)]	Sensor Cat. No. and Probe Length [mm (in.)]						Spacer Kit Cat. No. 51
	871D-xxxxx260-xx	871D-xxxxx317-xx	871D-xxxxx524-xx	871D-xxxxx730-xx	871D-xxxxx959-xx	871D-xxxxx1159-xx	
	26 (1.025)	31.7 (1.25)	52.4 (2.062)	73 (2.875)	95.9 (3.775)	115.9 (4.56)	
4.78 (0.188)	21.26 (0.837)	26.97 (1.062)	47.60 (1.874)	68.25 (2.687)	91.11 (3.587)	111.05 (4.372)	871A-S478
5.72 (0.225)	20.32 (0.8)	26.04 (1.025)	46.66 (1.837)	67.31 (2.65)	90.17 (3.55)	110.11 (4.335)	871A-S572
7.8 (0.307)	18.24 (0.718)	23.95 (0.943)	44.58 (1.755)	65.23 (2.568)	88.09 (3.468)	108.03 (4.253)	871A-S780
12.7 (0.5)	13.34 (0.525)	19.05 (0.75)	39.67 (1.562)	60.33 (2.375)	83.19 (3.275)	103.12 (4.06)	871A-S1270
14.27 (0.562)	11.76 (0.463)	17.48 (0.688)	38.10 (1.5)	58.75 (2.313)	81.61 (3.213)	101.55 (3.998)	871A-S1427
15.24 (0.6)	10.80 (0.425)	16.51 (0.65)	37.13 (1.462)	57.79 (2.275)	80.65 (3.175)	100.58 (3.96)	871A-S1524
17.37 (0.684)	8.66 (0.341)	14.38 (0.566)	35.00 (1.378)	55.65 (2.191)	78.51 (3.091)	98.45 (3.876)	871A-S1737
18.09 (0.712)	7.95 (0.313)	13.67 (0.538)	34.29 (1.35)	54.94 (2.163)	77.80 (3.063)	97.74 (3.848)	871A-S1809
23.8 (0.937)	2.24 (0.088)	7.95 (0.313)	28.58 (1.125)	49.23 (1.938)	72.09 (2.838)	92.02 (3.623)	871A-S2380

Approximate Dimensions

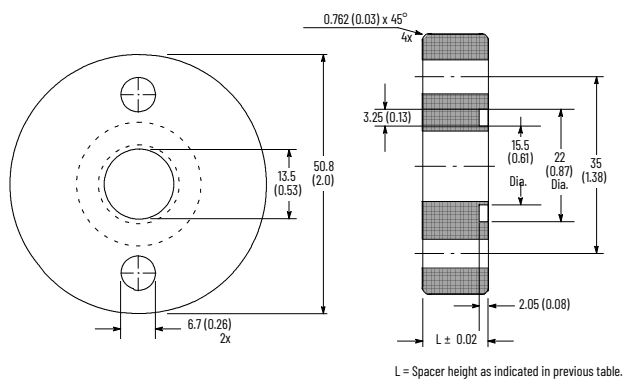
Dimensions shown in mm (in.).



51. Each spacer kit contains: one spacer, one O-ring, and two appropriate length mounting bolts.

Accessories – VersaCube Sensors

VersaCube Mounting Kit



The mounting kit for VersaCube® sensors provides additional mounting flexibility to 871P VersaCube style sensors. This kit includes an accessory mounting bracket that allows the VersaCube sensor to bolt in place of the existing 871P rectangular and similar competitive sensors. Mounting screws are also supplied.


Additionally, a ground lug terminal and green color-coded binding screw are provided for grounding the VersaCube sensor in case the unit is not mounted to a grounded metal frame.

Kit includes:

- (1) Threaded mounting bracket
- (1) Through-hole mounting bracket
- (2) 10-32 x 1 in. mounting screw
- (2) 10-32 x 1.5 in. mounting screw
- (1) Ground terminal lug
- (1) Green color-coded binding screw


Description	Cat. No.
Mounting kit	871A-PKIT

Typical Application



Approximate Dimensions

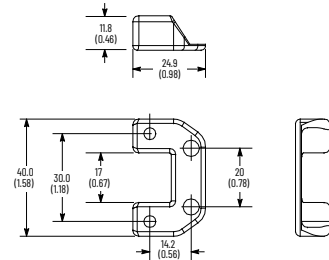Figure 189. Dimensions in mm (in.)




VersaCube Proximity Sensors (Limit Switch Style)

The limit switch style mounting bracket (catalog number 871A-PKITLS) has the same mounting pattern as the limit switch style proximity sensors. It provides excellent mounting stability and convenience when retrofitting a limit switch style proximity sensor with a VersaCube sensor.


Description	Cat. No.
Mounting kit	871A-PKITLS

Typical Application




Approximate Dimensions

Figure 190. Dimensions in mm (in.)



PTFE Cover for VersaCube Sensor

These PTFE covers are designed to protect the VersaCube sensor from weld slag and other debris.



Description	Cat. No.
Short PTFE cover	871A-KCT40-F
Long PTFE cover	871A-KCT40-T

Approximate Dimensions

Dimensions shown in mm (in.).

Figure 191. Cat. No. 871A-KCT40-F


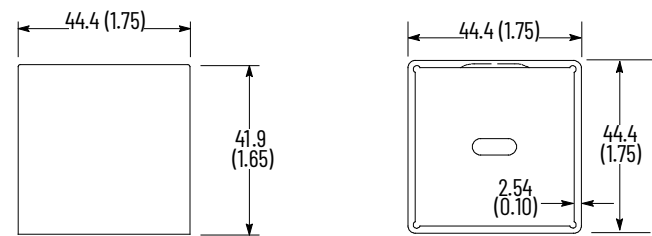


Figure 192. Cat. No. 871A-KCT40-T

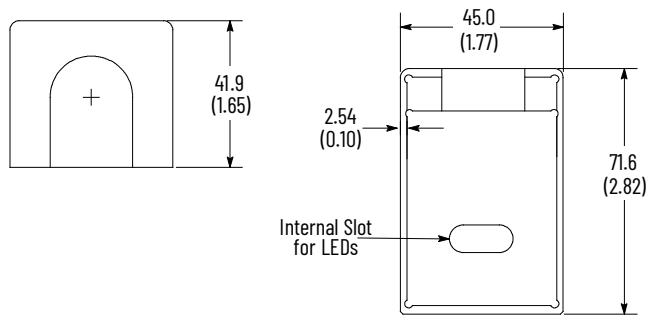

IMPORTANT: Internal slot for light-emitting diode (LED) visibility.

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, and product notification updates.	rok.auto/support
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Technical Documentation Center	Quickly access and download technical specifications, installation instructions, and user manuals.	rok.auto/techdocs
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Get help determining how products interact, check features and capabilities, and find associated firmware.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Waste Electrical and Electronic Equipment (WEEE)



At the end of life, this equipment should be collected separately from any unsorted municipal waste.

Rockwell Automation maintains current product environmental information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com — expanding **human possibility**[®]

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2663 0600

ASIA PACIFIC: Rockwell Automation SEA Pte Ltd, 2 Corporation Road, #04-05, Main Lobby, Corporation Place, Singapore 618494, Tel: (65) 6510 6608

UNITED KINGDOM: Rockwell Automation Ltd., Pitfield, Kiln Farm, Milton Keynes, MK11 3DR, United Kingdom, Tel: (44)(1908) 838-800

Allen-Bradley, expanding human possibility, Pico, QuadroPlex, Rockwell Automation, ToughCoat Finish, ToughLink, VersaCube, and WorldProx are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.