Transparent Object Detection Sensor


E3S-R

- Senses glass wafers and LCD glass circuit boards.



Applications



Sensing of Glass Wafers and LCD Glass Circuit Bottles

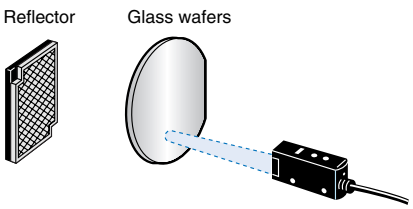

Ordering Information

Sensors

Red light

Sensor type	Shape	Connection method	Sensing distance	Model	
				NPN output	PNP output
Retroreflective Models	Horizontal 	Pre-wired	1m * [100mm]	E3S-R11	E3S-R31
		Connector type		E3S-R16	E3S-R36
	Vertical 	Pre-wired		E3S-R61	E3S-R81
		Connector type		E3S-R66	E3S-R86


* Values in parentheses indicate the minimum required distance between the sensor and reflector.
Note: Stable detection may not be possible of some glass wafer materials. Be sure to test whether the work can be detected.

Accessories (Order Separately)

Reflectors

Name	Sensing distance	Model	Quantity	Remarks
Reflectors	Refer to ratings/performance	E39-R1	1	Supplied with the product.

Clamps/Other

Shape	Model	Quantity	Remarks
	E39-L69	1	Included as an accessory for the horizontal model.
	E39-L70	1	Included as an accessory for the vertical model.
	E39-L93	One set	Sensor adjuster: Easy mounting and adjustment on aluminum frame and rail of conveyors and other equipment.
	E39-L97	1	Horizontal protective cover clamp.
	E39-L98	1	Vertical protective cover clamp.
	E39-L60	1	Contact mounting plate: Accessory to E3S-R□.

Note: 1 . If a through-beam model is used, order two Mounting Brackets for the emitter and receiver respectively.
2 . For details, refer to "Mounting bracket list".

Sensor I/O Connectors

Cable	Shape		Cable length		Model
Standard cable	Straight		2 m	3-wire type	XS2F-D421-DC0-A
			5 m		XS2F-D421-GC0-A
	L-shape		2 m		XS2F-D422-DC0-A
			5 m		XS2F-D422-GC0-A

Rating/performance


Item	Model	Retroreflective Models (with M.S.R)
Sensor type	NPN output	E3S-R11/-R16/-R61/-R66
	PNP output	E3S-R31/-R36/-R81/-R86
Sensing distance		1 m (100 mm) *1(When using the E39-R1)
Standard sensing object		75-mm dia. or larger opaque LCD glass plate (thickness: 0.7 mm)
Directional angle		3 to 10°
Light source (wave length)		Red LED (700 nm)
Power supply voltage		10 to 30 V DC (including 10% ripple (p- p))
Current consumption		30 mA max.
Control output		Load supply voltage: 30 VDC or less, load current: 100 mA or less (residual voltage of 1 V or less), NPN open collector output, Light ON / Dark ON switching
Protective circuits		Reverse polarity protection, output short-circuit protection, mutual interference prevention
Response time		Operation or reset: 1 ms max.
Sensitivity adjustment		2-revolution endless volume
Ambient illuminance		Incandescent lamp: 5,000 lux max. Sunlight 10,000 lux max.
Ambient temperature		Operating: 0 to +40°C, storage: -40 to +70°C (no ice formation or condensation)
Ambient humidity		Operating: 35 to 85% RH, Storage: 35 to 95% RH (no condensation)
Insulation resistance		20 M min. at 500 VDC
Dielectric strength		1,000 VAC at 50/60 Hz for 1 minute
Vibration resistance		10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions
Shock resistance		Destruction: 500 m/s^2 for 3 times each in X, Y, and Z directions
Protective structure		IEC 60529 IP67
Connection method		Pull-out cable type (standard cord length: 2 m) / connector type
Weight (Packed state)		Approximately 110 g (pull-out cable type) Approximately 60 g (connector type)
Material	Case	PBT (polybutylene terephthalate)
	Lens	Denatured polyarylate
	Mounting Brackets	Stainless steel (SUS304)
Accessories		Clamps (with screws), operation manual, reflector

*1. Values in parentheses indicate the minimum required distance between the sensor and reflector.

Characteristic data (typical)

Operating Range

E3S-R11, E3S-R61+ E39R1

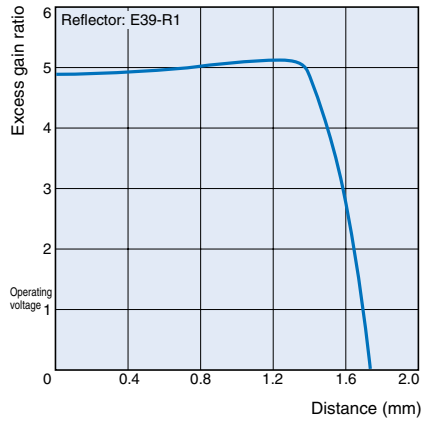

Changes in light intensity when detecting various transparent objects (Note 1)




The following are the permeation rates of a various transparent objects on condition that a permeation rate of 100 means that there is no object within the sensing distance of the E3S-R. The permeation rate of any type of object sensed by the E3S-R must be as low as possible for the stable sensing of the object. Before using the E3S-R to sense objects, use samples of the objects to check if the E3S-R can sense the samples easily.

Sensing object Shape / Model	Passage position	E3S-R11, R61, R81; E3S-R16, R66, R36, R86
		Center
Glass plate	50 x 50 t = 0.5	82
	50 x 50 t = 1	74
	50 x 50 t = 2	73
	50 x 50 t = 3	62
	50 x 50 t = 5	53
	50 x 50 t = 10	38
Liquid crystal glass	t = 0.5 (98% transparency)	86
	t = 0.7 (95% transparency)	81
	t = 1.1 (91% transparency)	75
Operating range		95 max.
Stable operating range		90 max.




Note: 1 . The sensing distance of each model was set to the rated sensing distance.
2 . The permeability values were checked with light with a wavelength of 700 m.

Output Circuit Diagram


NPN output

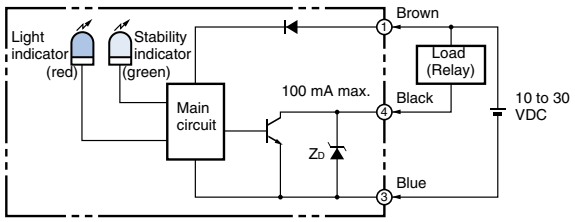Model	Operating status of output transistor	Timing chart	Mode selection switch	Output circuit
E3S-R11 E3S-R61 E3S-R16 E3S-R66	Light ON		L•ON	 Connector Pin arrangement  Note: Terminal 2 is not used.
	Dark ON		D•ON	

PNP output

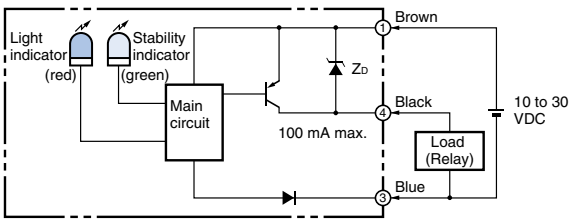Model	Operating status of output transistor	Timing chart	Mode selection switch	Output circuit
E3S-R31 E3S-R36 E3S-R81 E3S-R86	Light ON		L•ON	 Connector Pin arrangement  Note: Terminal 2 is not used.
	Dark ON		D•ON	

Connectors (Sensor I/O connectors)

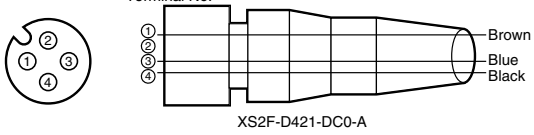

Class	Wire, outer jacket color	Connector pin No.	Application
For DC	Brown	①	+V
	---	②	---
	Blue	③	0V
	Black	④	Output

Note: Pin 2 is not used.

Precautions

Correct Use

● For adjustment

- The passage point of the detection object should be the central point between the reflective plate and the photoelectric switch. If too close to the reflective plate, an error may result.
- To obtain sufficient detection performance, the E39-R1 must be used for the reflective plate unless otherwise specified.


Dimensions (Unit: mm)

Sensors


Horizontal type

Pre-wired


E3S-R11
E3S-R31




With Mounting Blanket Attached

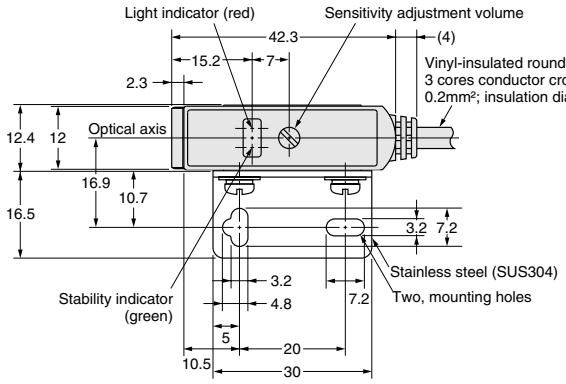

Mounting Holes




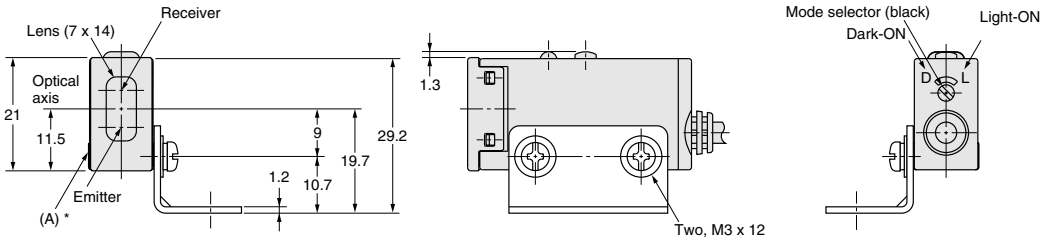


* The Mounting Bracket can also be used on side A.

Connector type


E3S-R16
E3S-R36




With Mounting Blanket Attached

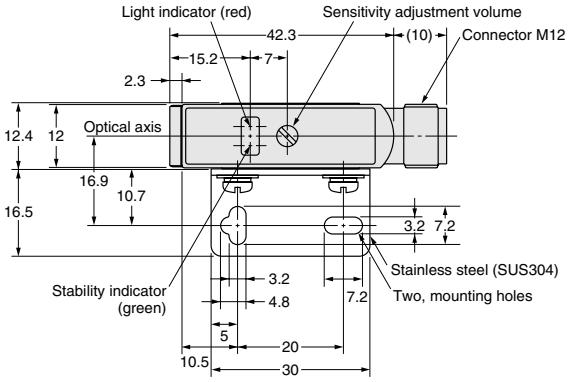

Mounting Holes



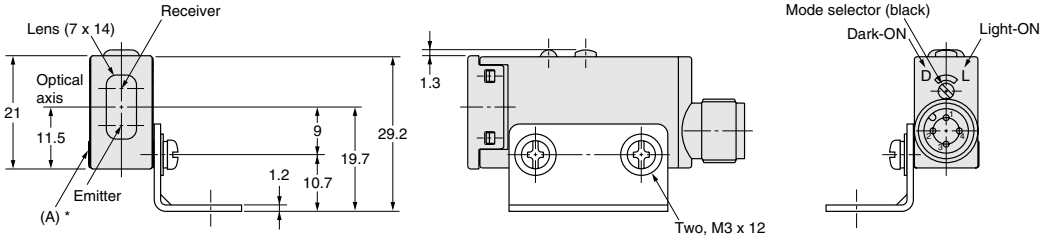


* The Mounting Bracket can also be used on side A.


Vertical type

Pre-wired


E3S-R61
E3S-R81



With Mounting Blanket Attached

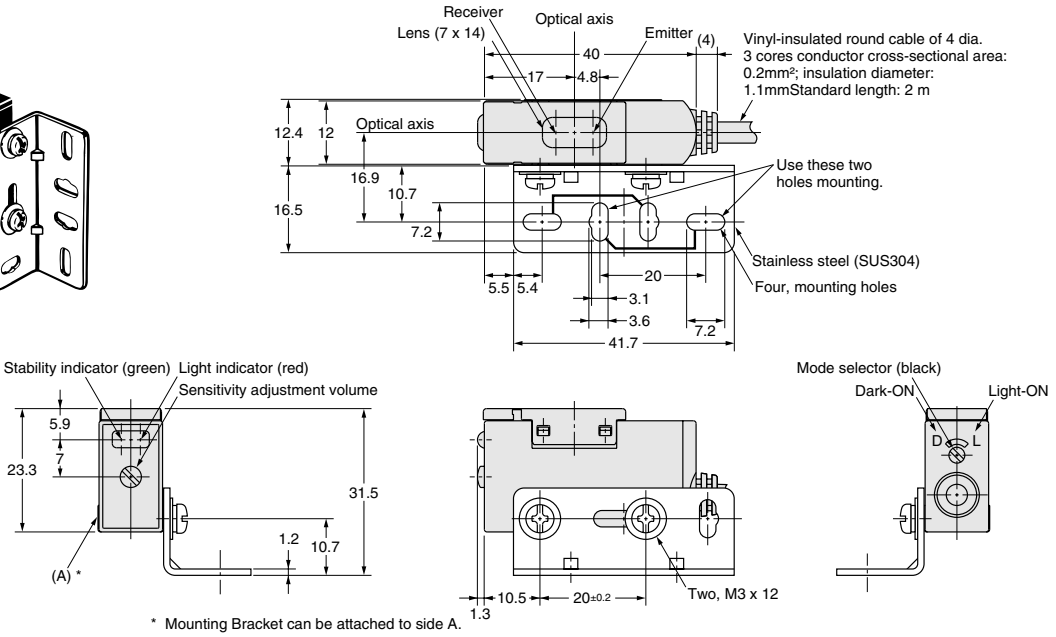


Mounting Holes




* Mounting Bracket can be attached to side A.

Connector type


E3S-R66
E3S-R86



With Mounting Blanket Attached

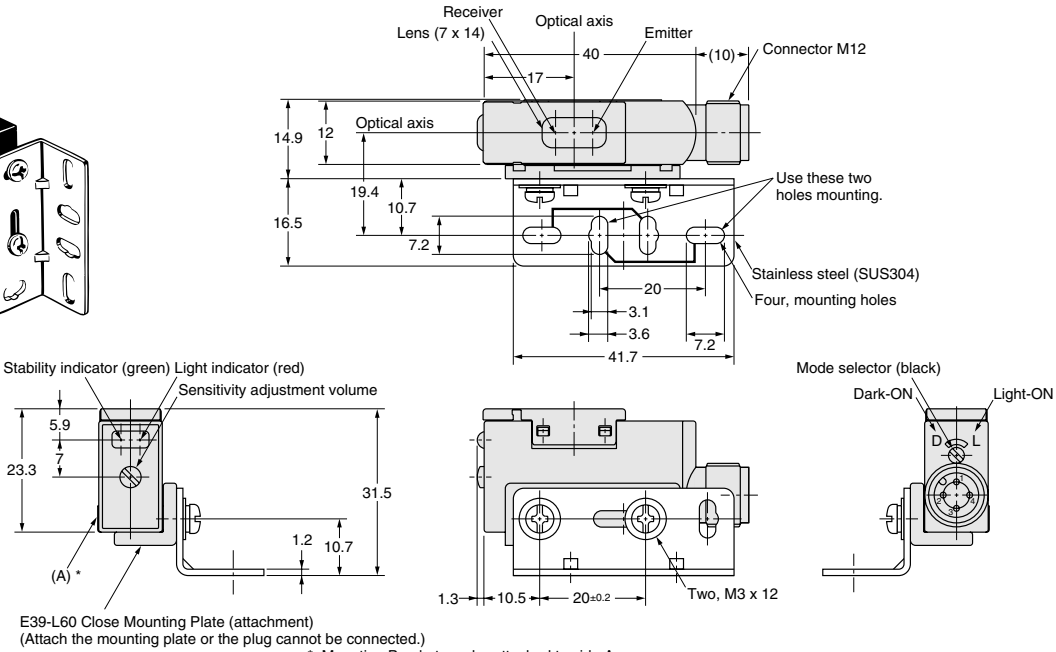

Mounting Holes



E39-L60 Close Mounting Plate (attachment)
(Attach the mounting plate or the plug cannot be connected.)

* Mounting Bracket can be attached to side A.

Accessories (Order Separately)

H-5

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. E009-E2-07-X In the interest of product improvement, specifications are subject to change without notice.