
Inductive proximity switch IFRM 08P17A1/S35L

dimension drawing



general data	
mounting type	flush
nominal sensing distance Sn	2 mm
hysteresis	3 ... 20 % of Sr
output indicator	3 port LED red

electrical data	
switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
output circuit	PNP make function (NO)
voltage drop Vd	< 2 VDC
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes


mechanical data	
type	cylindrical threaded
material (sensing face)	PBT
housing material	stainless steel
dimension	8 mm
housing length	46 mm
connection types	connector M8

ambient conditions	
operating temperature	-25 ... +75 °C
protection class	IP 67

photo



connection diagram

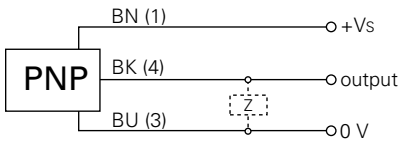

- long robust steel housings
- high switching frequency