


ONLINE DATA SHEET
www.mysick.com

Fiber-optic sensors
WLL180T, Fiber-optic photoelectric sensor

WLL180T-L632

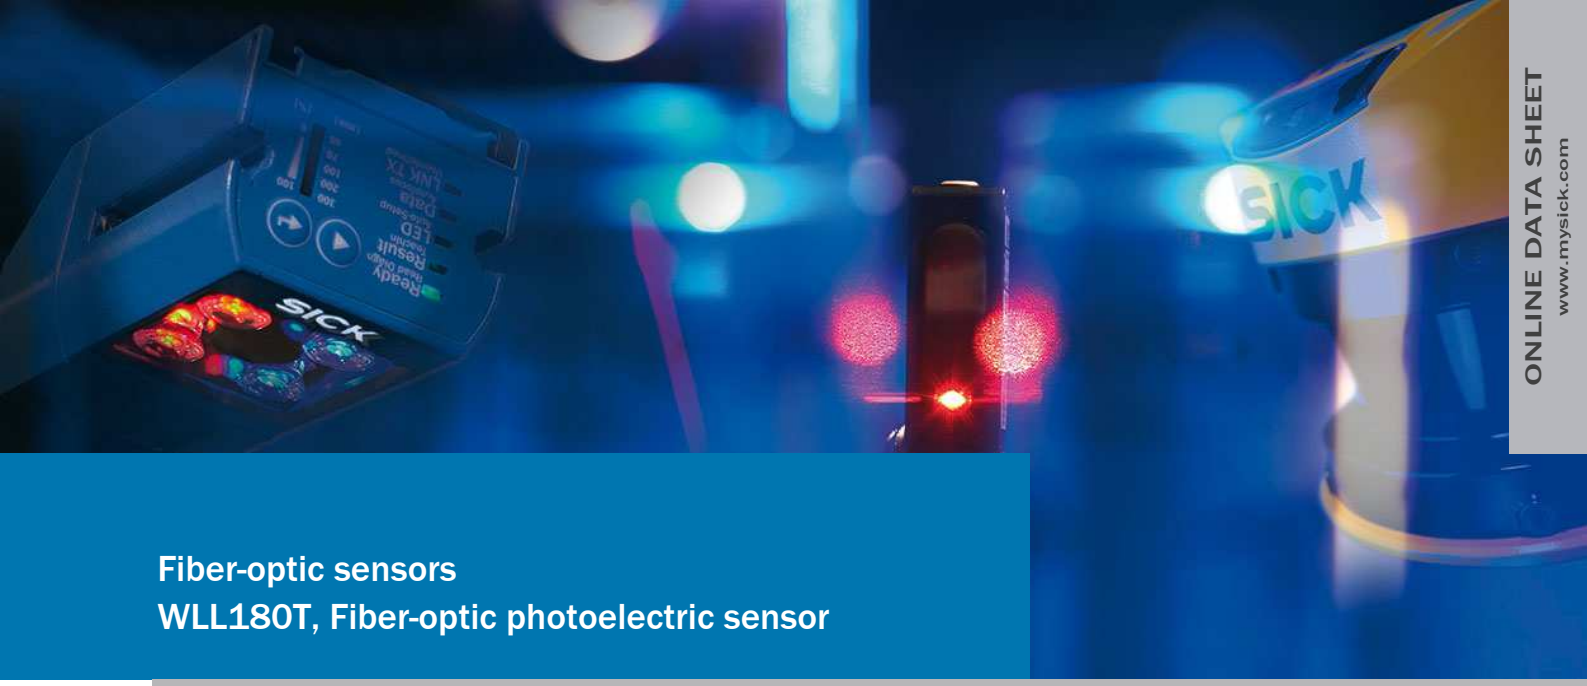

SICK
Sensor Intelligence.

SICK
Sensor Intelligence.

Fiber-optic sensors
WLL180T, Fiber-optic photoelectric sensor

Model Name > WLL180T-L632
Part No. > 6050762






Illustration may differ

At a glance

- Selectable response time up to 16 µs
- Sensing range up to 20 m, sensing distance up to 1400 mm
- Bus-compatible with anti-interference
- 2 x 4-digit display
- Adjustable hysteresis
- Rotatable display screen
- High-resolution signal processing
- Programmable time delays

Your benefits

- Reliable, rapid process detection, even under the most difficult ambient conditions, such as dust, spray or mist
- Easy commissioning and product changeover due to external teach-in
- Cross-talk is eliminated when utilizing bus configuration option
- Quick, easy setup and adjustment due to an intuitive operating menu
- Flexible parameter adjustment due to high-resolution signal processing. Hysteresis and time delays can be adapted to suit the application, e.g., when detecting tiny or transparent objects
- Easy-to-read display, even under difficult installation conditions

Features

Device type:	Base unit [1)]
Dimensions (W x H x D):	10.5 mm x 34.6 mm x 71.9 mm
Sensing range max.::	0 m ... 20 m, through-beam system [2) 3)]
Sensing range::::	0 m ... 18 m, through-beam system, 0 mm ... 1,400 mm, proximity system [4) 5) 6) 7)]
Light source:	LED [8)]
Type of light:	Visible red light
Wave length:	650 nm
Sensitivity adjustment:	Teach-in button cable +/- increment button, manual
Adjustment of operating distance:	Cable, +/- increment button, manual, Teach-in button
Teach-in:	Menu-controlled
Time type:	Without time delay time delay off switch on delay ON and OFF delay one shot

© SICK AG. Subject to change without notice.

Delay time:	Programmable: 0 ... 9,999 ms
Indication:	Display
Sensor/detection principle:	Fiber-optic photoelectric sensor
Angle of dispersion:	Ca. 65 °
Housing design (light emission):	Rectangular
Display:	LED status display / 2x 4-character digital dual displays, Set value (green indicator) and actual value (red indicator) are displayed simultaneously, display of parameters

[1] Up to 15 expansion units can be connected [2] [6] Sensing range with 8 ms response time. Reduction with shorter response time (see tables LL3/WLL180T) [3] [7] LL3-TX01 [4] Objects to be sensed with 90% reflectivity (based on DIN 5033 white standard). Sensing range with 8 ms response time. Reduction with shorter response time (see tables LL3/WLL180T) [5] LL3-DK06 [8] Average service life of 100,000 h at T_A = +25 °C

Mechanics/electronics


Enclosure rating:	IP 50 [1]
Supply voltage:	12 V DC ... 24 V DC [2]
Residual ripple:	≤ 10 % [3]
Power consumption:	≤ 50 mA [4]
Output type:	2 x NPN, Light/dark-switching, manually selectable, open collector
Output current Imax.:	≤ 100 mA
Response time:	≤ 2 ms ≤ 8 ms ≤ 16 µs ≤ 70 µs ≤ 250 µs [5]
Switching frequency:	31.2 kHz 7.1 kHz 2 kHz 250 Hz 62.5 Hz
Electrical connection:	Cable, 4-wire, 2 m [6]
Cable material:	PVC
Conductor cross-section:	0.2 mm²
Protection class:	III
Circuit protection::::	A, B, C, D [7] [8] [9] [10]
Special device:	0
Housing material:	ABS/PC
Ambient temperature operation:	-25 °C ... 55 °C
Ambient storage temperature:	-40 °C ... 70 °C

See LL3 fiber-optic data;

[1] With correctly attached fibre-optic cable LL3 and closed protection hood [2] +- 10% [3] May not exceed or fall short of V_S tolerances [4] Without load [5] Selectable [6] Do not bend below 0 °C [7] A = V_S connections reverse-polarity protected [8] B = inputs and output reverse-polarity protected [9] C = interference suppression [10] D = outputs overcurrent and short-circuit protected


© SICK AG. Subject to change without notice.

Dimensional drawing

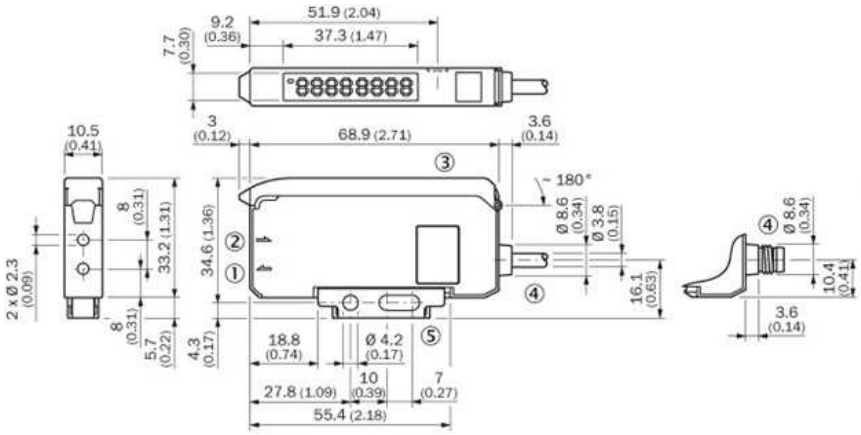

|1| Sender LED, installation of LL3 fibre-optic cable (sender fibre)
|2| Receiver, installation of LL3 fibre optic cable (receiver fibre)
|3| Locking the fiber-optic cables
|4| Protective hood, can be raised at both ends
|5| Connection
|6| Mounting bracket, included


Adjustments possible

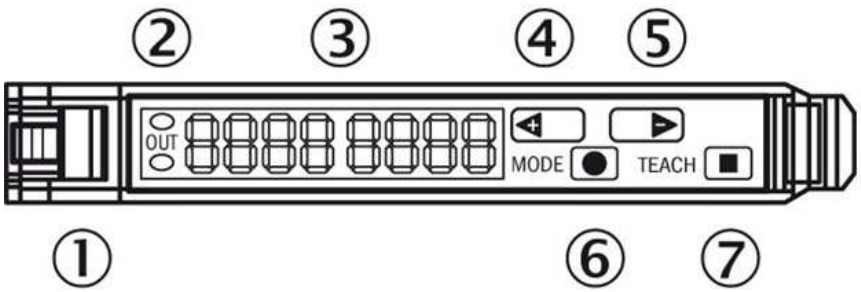

|3| Locking the fiber-optic cables
|7| LED indicator orange, lights up when switching output is acitve
|8| Numeric display 2 x 4-digit; green: switching threshold, operating mode; red : actual value, Teach-in and function parameter
|9| Step-button> (manual switching threshold: higher; or next function parameter)
|10| Step-button< (manual switching threshold: lower; or previous function parameter)
|11| Mode/Enter-button
|12| Teach-in button

© SICK AG. Subject to change without notice.

Connection diagram

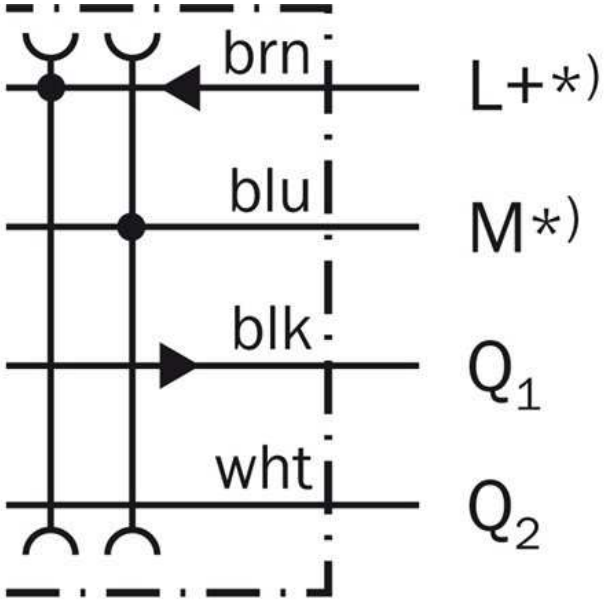

*) Only base unit

© SICK AG. Subject to change without notice.

A4 4c int43

Australia
Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg
Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil
Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada
Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika
Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China
Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark
Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland
Phone +49 211 5301-301
E-Mail info@sick.de

España
Phone +34 93 480 31 00
E-Mail info@sick.es

France
Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain
Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India
Phone +91–22–4033 8333
E-Mail info@sick-india.com

Israel
Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia
Phone +39 02 27 43 41
E-Mail info@sick.it

Japan
Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország
Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland
Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge
Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich
Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska
Phone +48 22 837 40 50
E-Mail info@sick.pl

România
Phone +40 356 171 120
E-Mail office@sick.ro

Russia
Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz
Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore
Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija
Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa
Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea
Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi
Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige
Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan
Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye
Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates
Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México
Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at **www.sick.com**

SICK
Sensor Intelligence.