
ZS1090-0002 | RJ45 plug field assembly, IP67

RJ45, plug, straight, male, 8-pin



Electrical data Mechanical data	
Installation size	RJ45
Connector type	plug
Configuration	straight
Contact type	male
Number of positions (face)	8-pin
Weight	0.015 kg (0.0322 lb)
Body material	PA
Seal	NBR
Max. wire cross-section	AWG24...AWG26 (0.25 mm^2...0.14 mm^2)
Max. cable outer diameter	4.0... 5.4 mm
Environmental data	
Ambient temperature (operation)	-5...+60°C, +23...+140°F
Protection rating	IP65/IP67 (according to EN 60529)

Dimensions	

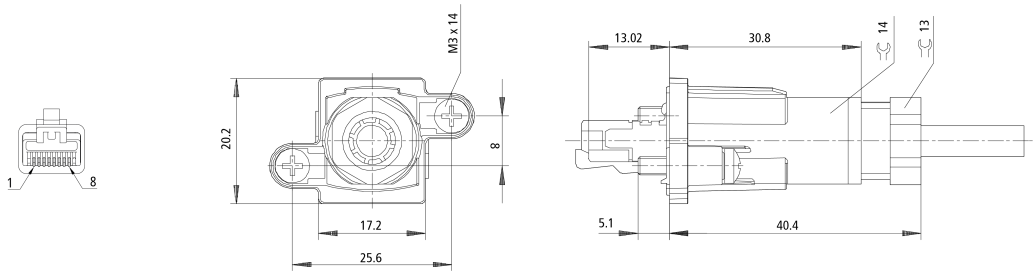

A1	55.0 mm
A2	20.5 mm
A3	33.0 mm

Notes

- Illustrations similar

Ordering information	
ZS1090-0002	plug, field assembly, RJ45, IP67, straight, male, 8-pin, 0.14...0.34 mm², Ø 4...5.4 mm



Products marked with a crossed-out wheeled bin shall not be discarded with the normal waste stream. The device is considered as waste electrical and electronic equipment. The national regulations for the disposal of waste electrical and electronic equipment must be observed.

Beckhoff®, ATRO®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, MX-System®, Safety over EtherCAT®, TC/BSD®, TwinCAT®, TwinCAT/BSD®, TwinSAFE®, XFC®, XPlanar® and XTS® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 02/2026

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressively agreed in the terms of contract.