ZS2020-2711 | M12, power, field assembly, plug, straight, male, 5-pin, K-coded, IP67


M12, plug, straight, male + female (PE inverse), 5-pin (4+PE), K-coded



Electrical data	
Rated voltage	63 V AC/DC
Rated current	12 A at 40°C (according to IEC 61076-2-111)
Contact resistance	< 10 mΩ
Insulation resistance	≥ 100 MΩ
Mechanical data	
Accessories type	Connectors
Installation size	M12
Connector type	plug
Configuration	straight
Contact type	male + female (PE inverse)
Number of positions (face)	5-pin (4+PE)
Coding	K-coded
Wire termination	screw connection
Recommended torque, nut	0.6 Nm
Recommended torque, screw termination	0.2 Nm

Mating cycles	≥ 100
Body color	black
Flange housing material	PA 66 UL 94 HB
Coupling nut material	PA
Contact material	brass/gold plated
Max. wire cross-section	AWG18...AWG12 (0.75 mm²...2.50 mm²)
Stripping length	4...5 mm
Max. cable outer diameter	8.0...12 mm
Environmental data	
RoHS compliant	yes
Ambient temperature (operation)	-25...+85°C, -13...+185°F
Protection rating	IP67
UL	yes, UL2238
Application Note	Robust and high power transmission up to 12 A and 630 V for AC and DC applications

Dimensions

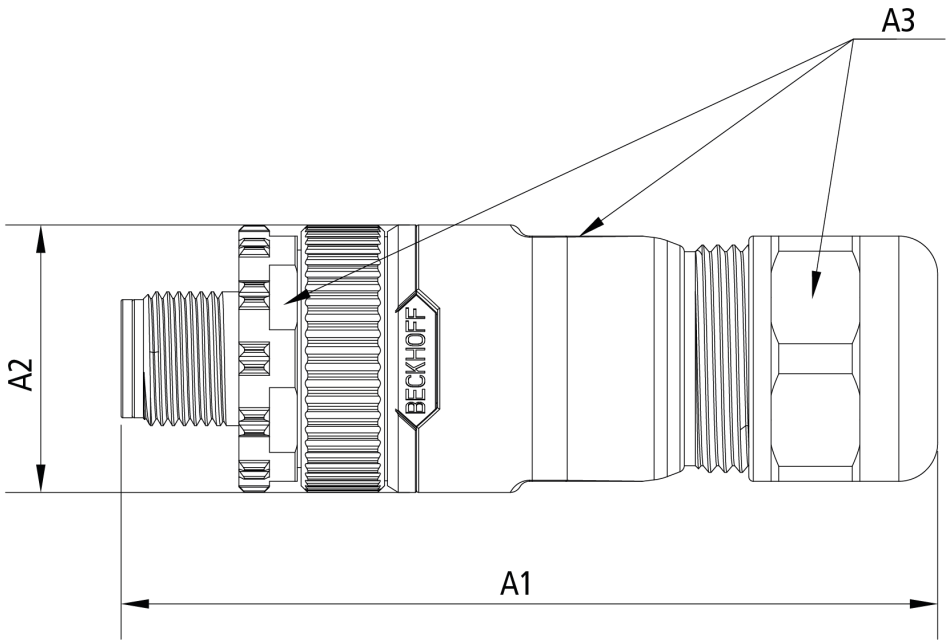

A1	~70 mm
A2	Ø 24 mm
A3	AF22

Notes

- Illustrations similar

Ordering information	
ZS2020-2711	M12, plug, field assembly, straight, male, 4-pin, S-coded, 0.5...2.5 mm², Ø 8...12 mm

Accessories	
ZB8801-0000	torque wrench for hexagonal plugs, adjustable
ZB8801-0004	Torque cable key, M12 (field assembly Power)wrench size 22, for ZB8801-0000



Products marked with a crossed-out wheeled bin shall not be discarded with the normal waste stream. The device is considered as waste electrical and electronic equipment. The national regulations for the disposal of waste electrical and electronic equipment must be observed.

Beckhoff®, ATRO®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, MX-System®, Safety over EtherCAT®, TC/BSD®, TwinCAT®, TwinCAT/BSD®, TwinSAFE®, XFC®, XPlanar® and XTS® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 02/2026

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressively agreed in the terms of contract.