Product specifications

Eaton DILM12-10(600V60HZ)

Catalog Number: DILM12-10(600V60HZ)

Eaton XT IEC mini contactor, 12A, 600 Vac, 60 Hz, 1NO, 12A, Frame B, 45 mm, 60 Hz, 1, 2/ 3, 3, 10, 10 (1/3PH @120, 240/208, 240, 480, 600 V), Three-pole, Screw terminals, FVNR, 5.5 kW

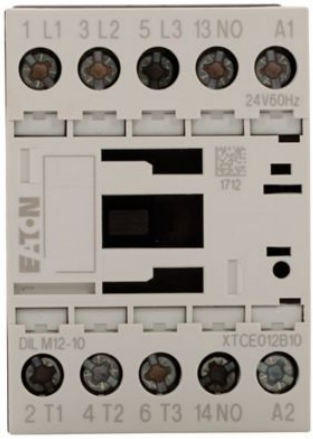


Photo is representative

General specifications

Product Name
Eaton XT IEC mini contactor

Catalog Number
DILM12-10(600V60HZ)

EAN
4015082768256

Product Length/Depth
1.8 in

Product Height
2.7 in

Product Width
3 in

Product Weight
0.48 lb

Warranty
1 year

Compliances
CE Marked
RoHS Compliant

Certifications
EN 60947
IEC 60947
CSA Certified
UL Listed

Catalog Notes
Screw terminals (6-65A); 5 mm (80-150A); no lugs (185-2000A)

Powering Business Worldwide

defaultTaxonomyAttributeLabel

Amperage Rating

12A

HP rating - max

1, 2/ 3, 3, 10, 10 (1/3PH @120,240/208,240,480,600 V)

Number Of Poles

Three-pole

Type

Full voltage non-reversing miniature contactor

Frequency rating

60 Hz

Frame size

45 mm

Terminals

Screw terminals

Coil

600 Vac, 60 Hz

Coil voltage

600 Vac, 60 Hz

Contact configuration

1 NO

Continuous ampere rating

12 A

Series

XT IEC

Operation

Non-reversing

Power consumption

5.5 kW

Resources

Multimedia

S1. E4. Ask the Experts - NEMA, IEC and DP contactors

Contactors Explained

Specifications and datasheets

Eaton Specification Sheet - DILM12-10(600V60HZ)

Global Data Sheet - DILM12-10(600V60HZ)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia