A-C-H-G-SST-126015 (Order no. 126015)

Straight actuator for safety switch CTP/CTA


- Straight actuator
- Two safety screws included





Straight actuator


The straight actuator is used on sliding doors or hinged doors with door radii greater than 300 mm. Safety screws prevent unscrewing of the actuators.
The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

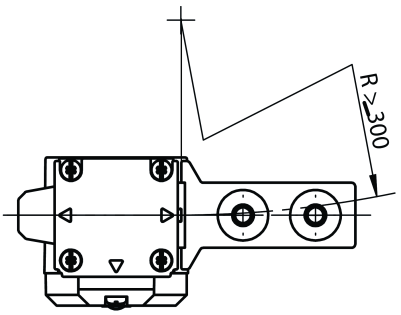


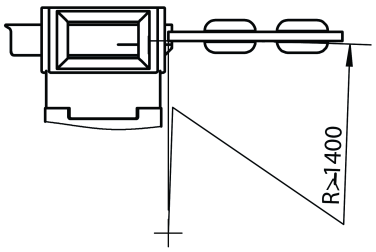

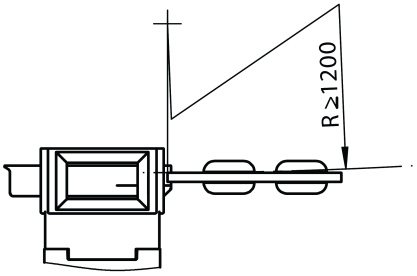

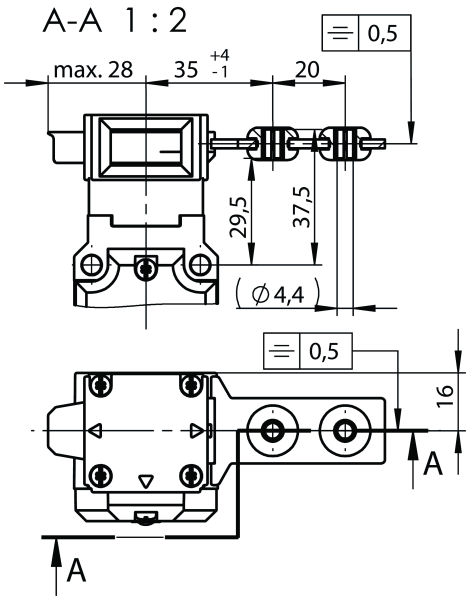

Dimensional drawings

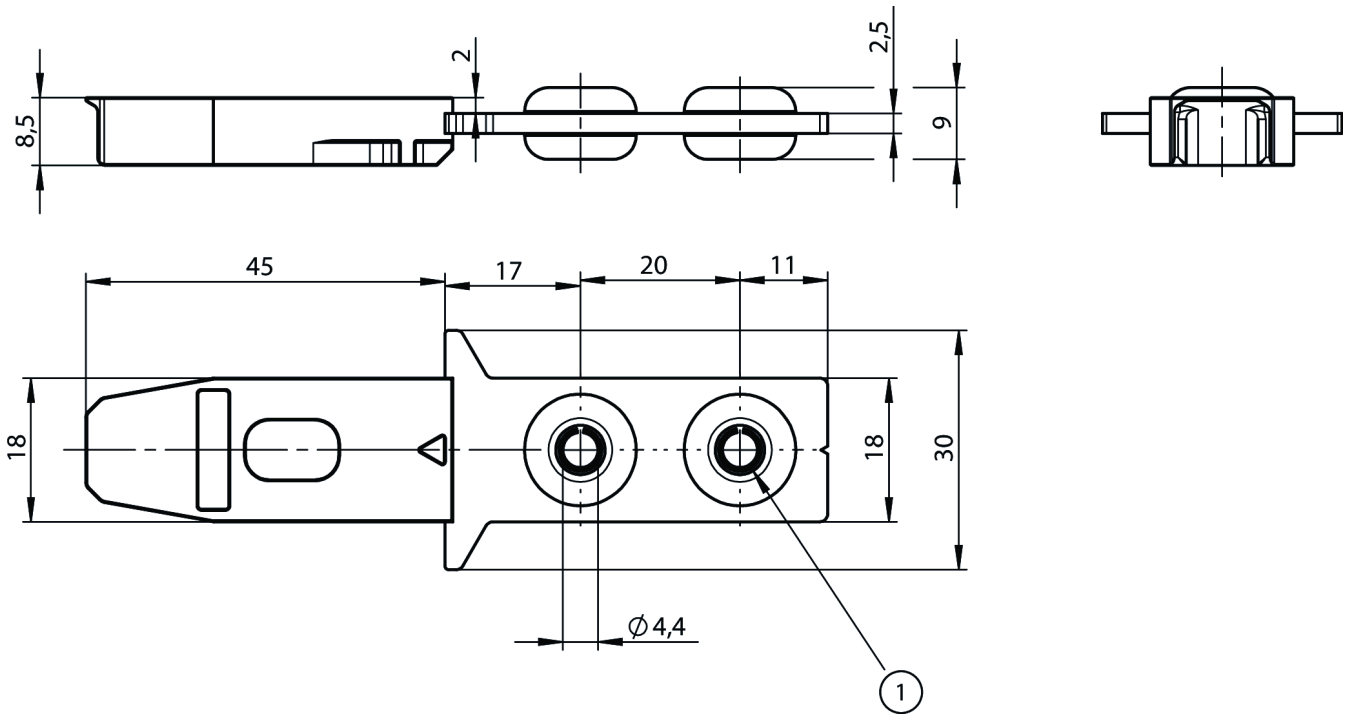

1 2x non-removable screws M4 included

Technical data

Approvals



Electrical connection values

Power supply	Inductive via read head

Mechanical values and environment

Mechanical life		1 x 10^6
Overtravel		5 mm
Degree of protection		IP67/IP69/IP69K
Ambient temperature		–20 … +55 °C
Material		
	Bush	NBR
	Mounting	Stainless steel
	Encapsulation	fiber reinforced plastic, red
Locking force F_{max}		3900 N
Locking force F_{Zh}		3000 N (FZH = FMAX/1.3)

Downloads

All documentation for this material can be found on our website:
https://www.euchner.de/en-us/a/126015/?#downloads-tab

Ordering data

Ordernumber	126015
Item designation	A-C-H-G-SST-126015
Gross weight	0,039kg
Customs tariff number	85389099990
ECLASS	27-27-24-04 Actuator for safety-related proximity switch

Accessories

Mounting accessories

Safety screws M4 x 14

074063 M4X14-NIRO/V100	▸ Safety screws M4 x 14 ▸ Screw head diameter: 10 mm ▸ Packaging unit 100 pieces