
# IG5772

## Inductive sensor

IGA2008-FRKG/V4A/US-100-IRF/RT

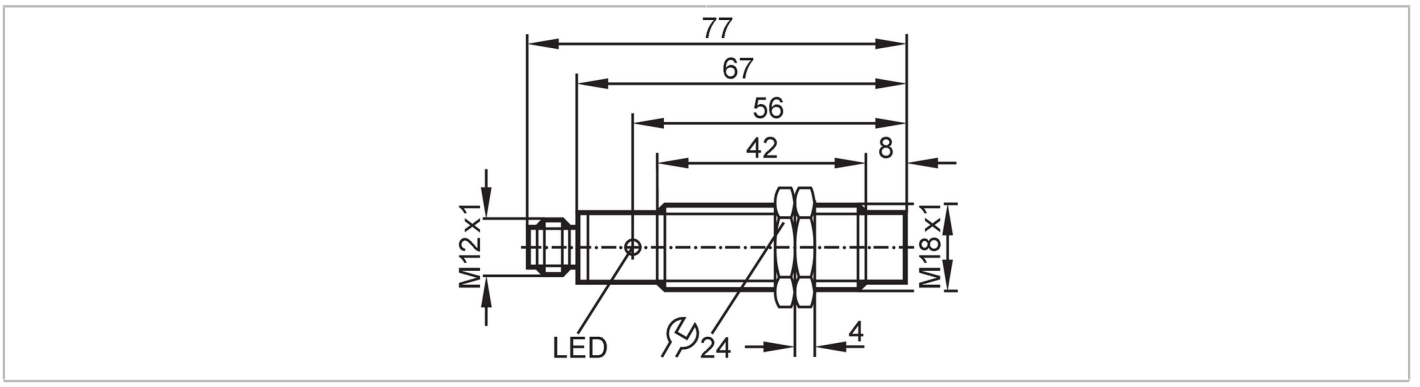


| | | |
|---|---|---|
| **Product characteristics** | | |
| Electrical design | | PNP/NPN |
| Output function | | normally open / normally closed; (selectable) |
| Sensing range | [mm] | 8 |
| Housing | | threaded type |
| Dimensions | [mm] | M18 x 1 / L = 77 |
| **Application** | | |
| Special feature | | Gold-plated contacts |
| **Electrical data** | | |
| Operating voltage | [V] | 10...55 DC |
| Protection class | | II |
| Reverse polarity protection | | yes |
| **Outputs** | | |
| Electrical design | | PNP/NPN |
| Output function | | normally open / normally closed; (selectable) |
| Max. voltage drop switching output DC | [V] | 4.6 |
| Minimum load current | [mA] | 4 |
| Max. leakage current | [mA] | 0.6 |
| Permanent current rating of switching output DC | [mA] | 300 |
| Switching frequency DC | [Hz] | 300 |
| Short-circuit protection | | yes |
| Type of short-circuit protection | | pulsed |
| Overload protection | | yes |
| **Detection zone** | | |
| Sensing range | [mm] | 8 |
| Real sensing range Sr | [mm] | 8 ± 10 % |
| Operating distance | [mm] | 0...6.5 |
| **Accuracy / deviations** | | |
| Correction factor | | steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.4 / copper: 0.3 |
| Hysteresis | [% of Sr] | 3...15 |

# IG5772

## Inductive sensor

IGA2008-FRKG/V4A/US-100-IRF/RT

| | | | |
|---|---|---|---|
| Switch point drift | [% of Sr] | -10...10 | |
| **Operating conditions** | | | |
| Ambient temperature | [°C] | -25...80 | |
| Protection | | IP 67 | |
| **Tests / approvals** | | | |
| EMC | | EN 60947-5-2 | |
| | | EN 55011 | class B |
| MTTF | [years] | 1806 | |
| UL approval | | Ta | 0...40 °C |
| | | Enclosure type | Type 1 |
| | | File number UL | E174191 |
| **Mechanical data** | | | |
| Weight | [g] | 62.9 | |
| Housing | | threaded type | |
| Mounting | | non-flush mountable | |
| Dimensions | [mm] | M18 x 1 / L = 77 | |
| Thread designation | | M18 x 1 | |
| Materials | | stainless steel (316Ti/1.4571); sensing face: PBT | |
| **Displays / operating elements** | | | |
| Display | | switching status | 1 x LED, red |
| **Accessories** | | | |
| Items supplied | | lock nuts: 2 | |
| **Remarks** | | | |
| Pack quantity | | 1 pcs. | |
| **Electrical connection - plug** | | | |

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated

