
IN5426

Inductive sensor

IN-2004-FRKG/PH

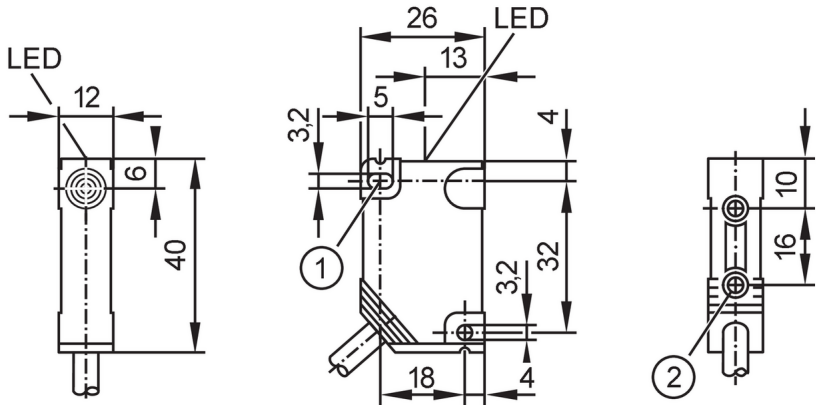

1 fixing hole
2 threaded bush M3 Depth 5.8 mm

Product characteristics		
Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Sensing range	[mm]	4
Housing		rectangular
Dimensions	[mm]	40 x 12 x 26
Electrical data		
Operating voltage	[V]	10...36 DC
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	4.6
Minimum load current	[mA]	4
Max. leakage current	[mA]	0.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1200
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Operating distance	[mm]	0...3.25
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.4 / copper: 0.3

IN5426

Inductive sensor

IN-2004-FRKG/PH

Hysteresis	[% of Sr]	1...15	
Switch point drift	[% of Sr]	-10...10	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 65; IP 66; IP 67	
Tests / approvals			
EMC		EN 61000-4-2 ESD	- kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-5 Surge	0,5 kV line to line, Ri: 2 Ohm
		EN 61000-4-6 HF conducted	10 V
		EN 55011 emission	class B
MTTF	[years]	2252	
Mechanical data			
Weight	[g]	98.4	
Housing		rectangular	
Mounting		non-flush mountable	
Dimensions	[mm]	40 x 12 x 26	
Materials		housing: PBT	
Fixing hole			
Tightening torque	[Nm]	< 0.5	
Threaded bush			
Tightening torque	[Nm]	< 1.2; (when brass insert in contact with counterpart)	
Displays / operating elements			
Display		switching status	1 x LED, yellow
Remarks			
Pack quantity		1 pcs.	

IN5426


Inductive sensor


IN-2004-FRKG/PH

Electrical connection

Cable: 2 m, PUR; 2 x 0.5 mm²

Connection

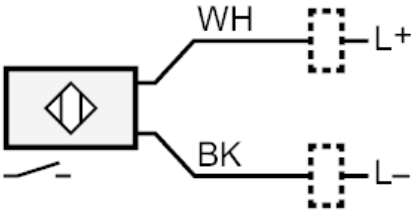

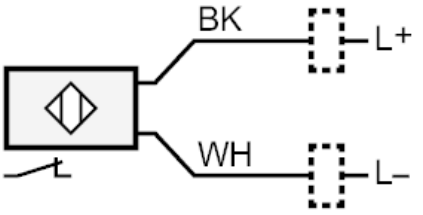

	Core colours :
BN =	brown
BU =	blue
BK =	black
WH =	white