
SI6600

Flow monitor

SIR11ABBFPKG/US-100-IPF

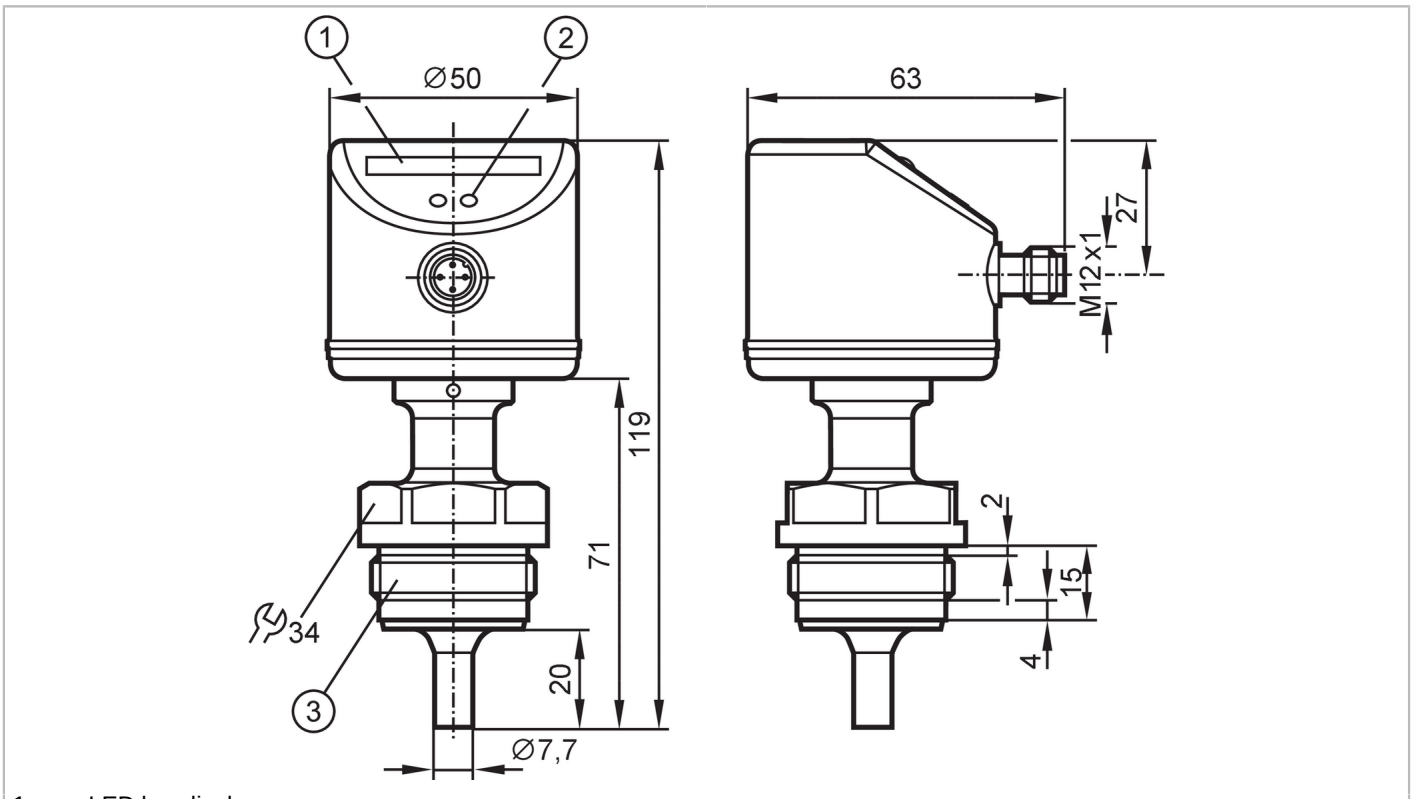

1 LED bar display
2 setting pushbutton
3 thread G1 Aseptoflex Vario

Product characteristics			
Number of inputs and outputs		Number of digital outputs: 1	
Process connection		threaded connection G 1 external thread Aseptoflex Vario	
Application			
Special feature		Gold-plated contacts	
Application		hygienic systems	
Medium temperature	[°C]	-25...95; (for SIP process: ...140 °C)	
Pressure rating		30 bar	3 MPa
MAWP for applications according to CRN	[bar]	30	
Electrical data			
Operating voltage	[V]	19...36 DC	
Current consumption	[mA]	< 60	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	10	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 1	
Outputs			
Total number of outputs		1	

SI6600

Flow monitor

SIR11ABBFPKG/US-100-IPF

Output signal			switching signal
Electrical design			PNP
Number of digital outputs			1
Output function			normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]		2.5
Permanent current rating of switching output DC	[mA]		250
Short-circuit protection			yes
Type of short-circuit protection			pulsed
Overload protection			yes
Measuring/setting range			
Probe length L	[mm]		20
Liquids			
Setting range	[cm/s]		3...300
Greatest sensitivity	[cm/s]		3...100
Gases			
Setting range	[cm/s]		200...3000
Greatest sensitivity	[cm/s]		200...800
Accuracy / deviations			
Repeatability	[% of Sr]		1...5
Note on repeatability			for water 5...100 cm/s; 25 °C
			Factory setting
Temperature drift	[cm/s x 1/K]		0.1; (for water 5...100 cm/s; 10...70 °C)
Temperature gradient	[K/min]		150
Switch point accuracy	[cm/s]		± 2...± 10; (for water 5...100 cm/s; 25 °C; Factory setting)
Hysteresis	[cm/s]		2...5; (for water 5...100 cm/s; 25 °C; Factory setting)
Response times			
Response time	[s]		1...10
Software / programming			
Adjustment of the switch point			pushbutton
Operating conditions			
Ambient temperature	[°C]		-25...60
Protection			IP 67; IP 69K
Tests / approvals			
EMC		DIN EN 61000-6-2	
		DIN EN 61000-6-3	
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	10 g (55...2000 Hz)
MTTF	[years]		298
Mechanical data			
Weight	[g]		425.5
Housing			cylindrical

SI6600

Flow monitor

SIR11ABBFPKG/US-100-IPF

Dimensions	[mm]	Ø 50 / L = 119
Materials		stainless steel (316L/1.4404); PC; PBT-GF20; EPDM/X; Sealing: FKM
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Process connection		threaded connection G 1 external thread Aseptoflex Vario
Probe diameter	[mm]	7.7
Installation length EL	[mm]	20

Displays / operating elements

Display	function	10 x LED, three-colour

Remarks

Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



Connection

