
Features

- 4 segments, redundant, individual modules per segment
- Supports all PLC and PCS hosts
- High-power trunk: Live work on devices in any hazardous area
- Best quality, smallest size and lowest heat dissipation
- For FOUNDATION Fieldbus H1
- Optional advanced diagnostics
- Passive impedance for high reliability
- Supports Ex ic voltage limitation
- Installation in Zone 2/Div. 2
- Spring terminals or screw terminals selectable

Assembly






Function

The FieldConnex® Compact Power Hub is a modular fieldbus power supply for four segments with lowest power dissipation and smallest foot print. It supports explosion protection e.g. the High-Power Trunk for longest cable run and highest device count. The Power Hub supports optional Advanced Diagnostics for fast fieldbus commissioning and online monitoring.

The motherboard for redundant power supply modules is the wiring interface with connectors for all DCS and PLC host systems. Sockets for all modules enable simple installation and replacement without tools. For power redundancy with seamless transfer, pairs of modules feed each segment. Wire connections can be selected as spring terminals or screw terminals.

This design allows the most compact cabinet layout. Excellent availability and a very long service life are achieved through: passive impedance filter per segment, high-availability fieldbus termination and plug-in connectors with retaining screws. Electronics are optimized for lowest power dissipation and compactness.

Connection

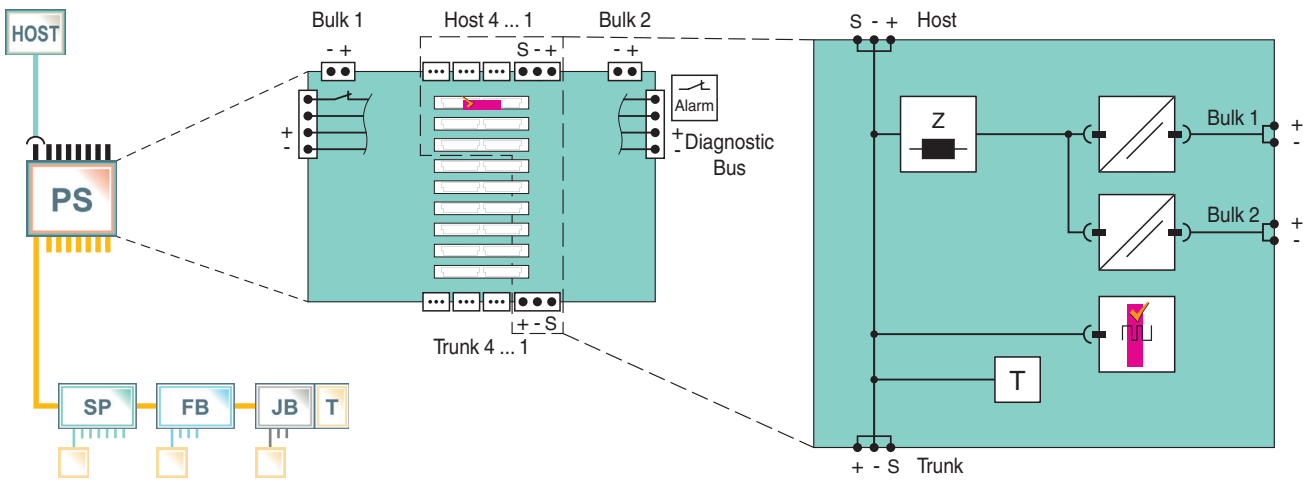


Release date 2018-11-05 15:08 Date of issue 2018-11-05 t169681_eng.xml

General specifications		
Design / Mounting		Motherboard based
Supply		
Connection		redundant
Rated voltage	U_r	19.2 ... 35 V SELV/PELV
Rated current	I_r	12 A
Power dissipation		typ. 0.4 W per segment
Fieldbus interface		
Number of segments		4 redundant
Host-side		general purpose host
Terminating resistor		100 Ω integrated
Indicators/operating means		
Fault signal		VFC alarm 1 A, 50 V DC, normally closed
Galvanic isolation		
Fieldbus segment/Fieldbus segment		functional insulation acc. to IEC 62103, rated insulation voltage 50 V_{eff}
Fieldbus segment/Supply		functional insulation acc. to IEC 62103, rated insulation voltage 250 V_{eff}
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Standard conformity		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529
Fieldbus standard		IEC 61158-2
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		< 95 % non-condensing
Shock resistance		10 g , 11 ms
Vibration resistance		1 g , 10 ... 150 Hz
Pollution degree		max. 2, according to IEC 60664
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Connection type		plug-in terminals , spring terminal and screw terminal
Core cross-section		2.5 mm^2
Housing material		Polycarbonate
Degree of protection		IP20
Mass		approx. 580 g
Mounting		DIN mounting rail
Data for application in connection with hazardous areas		
Certificate		TÜV 10 ATEX 555761X
Marking		Ⓔx II 3G Ex nA IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		CoC 3024816, CoC 3024816C
Approved for		Class I, Division 2, Groups A, B, C, D, T4 / Class I, Zone 2, AEx/Ex nA IIC T4
IECEx approval		IECEx TUN 13.0037X
Approved for		Ex nA IIC T4 Gc
Certificates and approvals		
Marine approval		DNV A-14038
General information		
Supplementary information		Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see

Release date 2018-11-05 15:08 Date of issue 2018-11-05 t169681_eng.xml

Dimensions

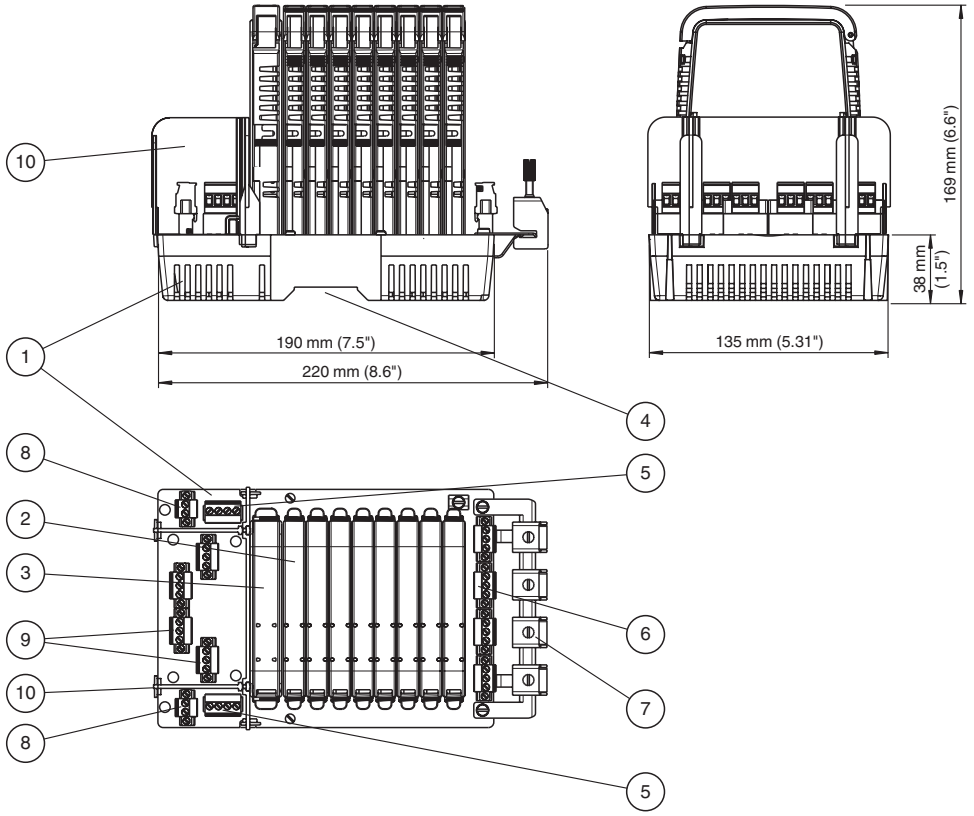

Description:
1 Motherboard MBHC-FB-4R*
2 Power supply modules
3 Diagnostic module
4 Mounting slot for DIN mounting rail
5 Connections for alarm voltage-free contact and diagnostic bus
6 Connections for fieldbus trunk
7 Screening/earthing kit for trunk shields, optional accessory
8 Connections for bulk power supply
9 Connections for host
10 Separation wall

Compatible Power Supply Modules

		HCD2-FBPS-1.23.500	HCD2-FBPS-1.500	
Power Output				
Voltage (V)		21 ... 23	28 ... 29.5	
Current (mA)		500	500	
Limit U_0 (V)		24	30	
Device in ...	**Type of Protection**			**Required Installation Components**
Zone 0/Div. 1	Intrinsically safe Ex ia		■	FieldBarrier
Zone 1/Div. 1	Intrinsically safe Ex ia		■	FieldBarrier
Zone 1/Div. 1	Flameproof Ex d		■	Segment Protector R-SP-E12 or any Segment Protector installed in Zone 2
Zone 2	Intrinsically safe Ex ic (Entity)	■	■	Selected Segment Protectors
Div. 2	Non-incendive	■	■	Any Segment Protector; power module selection depends on voltage of field device
Safe Area	No specific type of protection		■	Segment Protector recommended

For more details on the power supply modules see respective data sheets.

Diagnostic module selection

The following diagnostic modules are compatible with this motherboard.

Release date 2018-11-05 15:08 Date of issue 2018-11-05 t169681_eng.xml

Type code	Description
HD2-DM-B	Diagnostic Module, basic version
HD2-DM-A	Diagnostic Module, advanced version
HD2-DM-A.RO	Diagnostic Module, advanced version, relay output

The stationary and mobile Advanced Diagnostic Module (ADM) and related components provide measurement tools for the fieldbus physical layer. The ADM monitors many quality indicating values of the fieldbus physical layer. An expert system, which is included, analyzes the values and issues easy to understand messages indicating cause and remedy. The ADM is recommended for:

- **Faster commissioning and plant start-up:** Installation issues are known and corrected before loop check commences
- **Reliable operation through online monitoring**: The quality of the physical layer and installation is monitored making fieldbus a manageable asset
- **Efficient troubleshooting:** An expert system guides the user through issues and faults in the fieldbus installation

Many other tools are included that enhance fieldbus installation and upkeep. Please see datasheet on HD2-DM-A.

Accessories

Type code	Description
ACC-MB-HSK	Screening/earthing kit
ACC-MB-HDC	Diagnostic link cable, length 6 cm
ACC-MB-SW	Separation wall for Ex ic hazardous area applications

Installation note

See manual

Available Product Variants

Type code	Description
MBHC-FB-4R	Motherboard for redundant power supplies with pluggable screw terminals applicable for all systems
MBHC-FB-4R.1	Motherboard for redundant power supplies with pluggable spring terminals applicable for all systems

Release date 2018-11-05 15:08 Date of issue 2018-11-05 t169681_eng.xml