

Inductive sensor

NBN30-U1K-N0

- Sensor head bidirectional and rotatable
- 30 mm non-flush



Dimensions

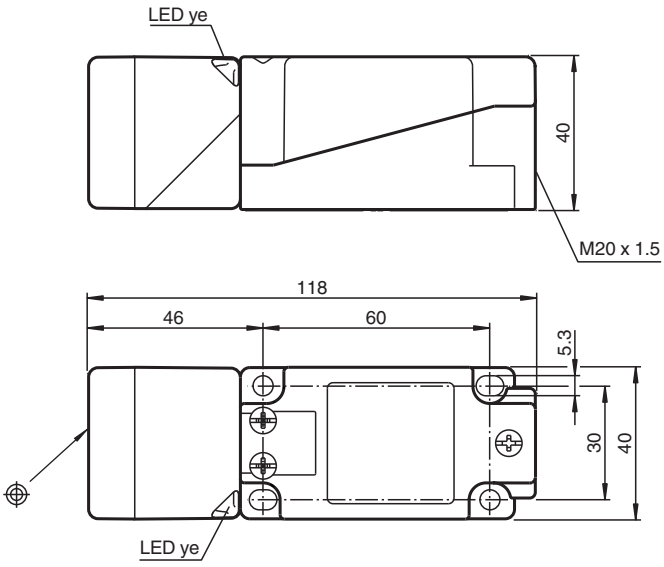

Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	s_n	30 mm
Installation		non-flush
Assured operating distance	s_a	0 ... 24.3 mm
Actual operating distance	s_r	27 ... 33 mm typ.
Reduction factor r_{Al}		0.45
Reduction factor r_{Cu}		0.42

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 212437_eng.pdf

Technical Data

Reduction factor r_{304}		0.79
Output type		2-wire
Nominal ratings		
Nominal voltage	U_o	8 V
Switching frequency	f	0 ... 150 Hz
Hysteresis	H	1 ... 15 typ. 5 %
Reverse polarity protection		reverse polarity protected
Short-circuit protection		yes
Current consumption		
Measuring plate not detected		min. 3 mA
Measuring plate detected		≤ 1 mA
Switching state indicator		LED, yellow
Functional safety related parameters		
$MTTF_d$		1660 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Electromagnetic compatibility		NE 21:2007
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates		
UL approval		
Ordinary Location		E87056
Hazardous Location		E501628
Control drawing		116-0451
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 100 °C (-13 ... 212 °F)
Storage temperature		-40 ... 100 °C (-40 ... 212 °F)
Mechanical specifications		
Connection type		screw terminals
Information for connection		A maximum of two conductors with the same core cross section may be mounted on one terminal connection! tightening torque 1.2 Nm + 10 %
Core cross-section		up to 2.5 mm^2
Minimum core cross-section		without wire end ferrule 0.5 mm^2 , with connector sleeves 0.34 mm^2
Maximum core cross-section		without wire end ferrule 2.5 mm^2 , with connector sleeves 1.5 mm^2
Housing material		PA
Sensing face		PA
Degree of protection		IP66 / IP68 / IP69K
Mass		225 g
Note		Tightening torque: 1.8 Nm (housing)
Equipment protection level Ga		
CE marking		[*PD-Z02585A*]
ATEX marking		⟨Ex⟩ II 1G Ex ia IIC T6…T1 Ga The Ex-related marking can also be printed on the enclosed label.
Standards		EN 60079-0:2012+A11:2013 EN 60079-11:2012 Ignition protection "Intrinsic safety" Use is restricted to the following stated conditions
Appropriate type		NBN30-U.K-N0...
Effective internal capacitance	C_i	max. 105 nF ; a cable length of 10 m is considered.


Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 212437_eng.pdf

Technical Data

Effective internal inductance	L_i	max. 300 µH ; a cable length of 10 m is considered.
Ambient temperature		Details of the correlation between the type of circuit connected, the maximum permissible ambient temperature, the temperature class, and the effective internal reactance values can be found on the EC-type examination certificate. **Note:** Use the temperature table for category 1 !!! The 20 % reduction in accordance with EN 1127-1 has already been applied to the temperature table for category 1.
Equipment protection level Gb		
CE marking		[*PD-Z02585A*]
ATEX marking		Ⓔx II 1G Ex ia IIC T6…T1 Ga The Ex-related marking can also be printed on the enclosed label.
Standards		EN 60079-0:2012+A11:2013, EN 60079-11:2012 Ignition protection "Intrinsic safety" Use is restricted to the following stated conditions
Appropriate type		NBN30-U.K-N0...
Effective internal capacitance	C_i	max. 105 nF ; a cable length of 10 m is considered.
Effective internal inductance	L_i	max. 300 µH ; a cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	Details of the correlation between the type of circuit connected, the maximum permissible ambient temperature, the temperature class, and the effective internal reactance values can be found on the EC-type examination certificate.
Equipment protection level Gc (ic)		
Certificate		PF 13 CERT 2895 X
CE marking		[*PD-Z02586A*]
ATEX marking		Ⓔx II 3G Ex ic IIC T6…T1 Gc The Ex-related marking can also be printed on the enclosed label.
Standards		EN 60079-0:2012, EN 60079-11:2012 Ignition protection category "ic" Use is restricted to the following stated conditions
Effective internal capacitance	C_i	max. 105 nF ; a cable length of 10 m is considered.
Effective internal inductance	L_i	max. 300 µH ; A cable length of 10 m is considered.
Special conditions		
for Pi=34 mW, Ii=25 mA, T6		73 °C (163.4 °F)
for Pi=34 mW, Ii=25 mA, T5		88 °C (190.4 °F)
for Pi=34 mW, Ii=25 mA, T4-T1		100 °C (212 °F)
for Pi=64 mW, Ii=25 mA, T6		66 °C (150.8 °F)
for Pi=64 mW, Ii=25 mA, T5		81 °C (177.8 °F)
for Pi=64 mW, Ii=25 mA, T4-T1		100 °C (212 °F)
for Pi=169 mW, Ii=52 mA, T6		45 °C (113 °F)
for Pi=169 mW, Ii=52 mA, T5		60 °C (140 °F)
for Pi=169 mW, Ii=52 mA, T4-T1		89 °C (192.2 °F)
for Pi=242 mW, Ii=76 mA, T6		30 °C (86 °F)
for Pi=242 mW, Ii=76 mA, T5		45 °C (113 °F)
for Pi=242 mW, Ii=76 mA, T4-T1		74 °C (165.2 °F)
Equipment protection level Da		
ATEX marking		Ⓔx II 1D Ex ia IIIC T135°C Da The Ex-related marking can also be printed on the enclosed label.
Standards		EN 60079-0:2012+A11:2013 EN 60079-11:2012 Ignition protection "Intrinsic safety" Use is restricted to the following stated conditions
Appropriate type		NBN30-U.K-N0...
Effective internal capacitance	C_i	max. 105 nF ; a cable length of 10 m is considered.
Effective internal inductance	L_i	max. 300 µH ; a cable length of 10 m is considered.
General information		
Use in the hazardous area		see instruction manuals
Category		1G; 2G; 3G; 1D

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 212437_eng.pdf

Connection



Accessories

	**MHW 01**	Modular mounting bracket
	**MH 04-2057B**	Mounting aid for VariKont and +U1+

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 212437_eng.pdf