# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



The figure shows a 5-position version

PCB terminal block, nominal current: 13.5 A, rated voltage (III/2): 400 V, nominal cross section: 1.5 mm², Number of potentials: 10, Number of rows: 2, Number of positions per row: 5, product range: MKKDSN 1,5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: green, Pin layout: Linear pinning, Solder pin [P]: 3.5 mm, type of packaging: packed in cardboard. The article can be aligned to create different nos. of positions!

## Your advantages

- Well-known connection principle allows worldwide use
- Low temperature rise, thanks to maximum contact force
- Allows connection of two conductors
- Extremely small design for the respective conductor cross section
- Conductor connection on several levels enables higher contact density
- The latching on the side enables various numbers of positions to be combined




## Key Commercial Data

| | |
|---|---|
| Packing unit | 1 pc |
| Minimum order quantity | 50 pc |
| GTIN | 4 017918 025441 |
| GTIN | 4017918025441 |
| Weight per Piece (excluding packing) | 11.610 g |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

## Technical data

### Item properties

| | |
|---|---|
| Brief article description | PCB terminal block |

# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

## Technical data

### Item properties

| | |
|---|---|
| Range of articles | MKKDSN 1,5 |
| Pitch | 5.08 mm |
| Number of positions | 5 |
| Drive form screw head | Slotted (L) |
| Screw thread | M3 |
| Mounting type | Wave soldering |
| Pin layout | Linear pinning |
| Number of levels | 2 |
| Number of connections | 10 |
| Number of potentials | 10 |

### Electrical parameters

| | |
|---|---|
| Nominal current | 13.5 A |
| Nom. voltage | 400 V |
| Rated voltage (III/3) | 250 V |
| Rated voltage (III/2) | 400 V |
| Rated voltage (II/2) | 630 V |
| Rated surge voltage (III/3) | 4 kV |
| Rated surge voltage (III/2) | 4 kV |
| Rated surge voltage (II/2) | 4 kV |

### Connection capacity

| | |
|---|---|
| Connection method | Screw connection with tension sleeve |
| pluggable | Yes |
| Conductor cross section solid | 0.14 mm² ... 1.5 mm² |
| Conductor cross section flexible | 0.14 mm² ... 1.5 mm² |
| Conductor cross section AWG / kcmil | 26 ... 16 |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm² ... 1 mm² |
| Conductor cross section, flexible, with ferrule, with plastic sleeve | 0.25 mm² ... 1 mm² |
| 2 conductors with same cross section, solid | 0.14 mm² ... 0.75 mm² |
| 2 conductors with same cross section, flexible | 0.14 mm² ... 0.75 mm² |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.25 mm² ... 0.5 mm² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm² ... 1 mm² (1st level: 0.5 mm² ... 1 mm² / 2nd level: 0.5 mm²) |
| Stripping length | 6 mm |
| Torque | 0.5 Nm ... 0.6 Nm |

### Material data - contact

# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

## Technical data

### Material data - contact

| | |
|---|---|
| Note | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
| Contact material | Cu alloy |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn) |
| Metal surface soldering area (top layer) | Tin (4 - 8 µm Sn) |

### Material data - housing

| | |
|---|---|
| Housing color | green (6021) |
| Insulating material | PA |
| Insulating material group | I |
| CTI according to IEC 60112 | 600 |
| Flammability rating according to UL 94 | V0 |
| Glow wire flammability index GWFI according to EN 60695-2-12 | 850 |
| Glow wire ignition temperature GWIT according to EN 60695-2-13 | 775 |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C |

### Dimensions for the product

| | |
|---|---|
| Caption | Schematische Abbildung - weitere Details siehe Produktfamilienzeichnung im Download Center |
| Length [ l ] | 18.3 mm |
| Width [ w ] | 27.94 mm |
| Height [ h ] | 22.6 mm |
| Pitch | 5.08 mm |
| Height (without solder pin) | 19.1 mm |
| Solder pin [P] | 3.5 mm |
| Pin spacing | 10.16 mm |
| Pin dimensions | 0.5 x 1 mm |

### Dimensions for PCB design

| | |
|---|---|
| Hole diameter | 1.3 mm |
| Pin spacing | 10.16 mm |

### Packaging information

| | |
|---|---|
| Type of packaging | packed in cardboard |
| Pieces per package | 50 |
| Denomination packing units | Pcs. |

### Electrical tests

| | |
|---|---|
| Rated current | 13.5 A |
| Conductor cross section | 1.5 mm² |
| Rated voltage (III/2) | 400 V |

# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

## Technical data

### Electrical tests

| | |
|---|---|
| Rated surge voltage (III/2) | 4 kV |

### Air clearances and creepage distances

### Standards and Regulations


| | |
|---|---|
| Connection in acc. with standard | EN-VDE |
| | CSA |
| Flammability rating according to UL 94 | V0 |

### Environmental Product Compliance


| | |
|---|---|
| REACh SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration” |

## Drawings

Drilling diagram




Dimensional drawing

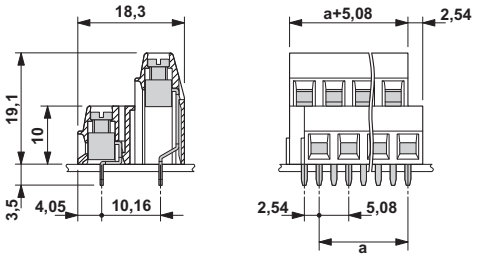


## Classifications

### eCl@ss

| | |
|---|---|
| eCl@ss 10.0.1 | 27440401 |
| eCl@ss 11.0 | 27460101 |
| eCl@ss 4.0 | 27141100 |
| eCl@ss 4.1 | 27141100 |
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27261100 |
| eCl@ss 6.0 | 27261100 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

## Classifications

### ETIM

| | |
|---|---|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002643 |
| ETIM 5.0 | EC002643 |
| ETIM 6.0 | EC002643 |
| ETIM 7.0 | EC002643 |

### UNSPSC

| | |
|---|---|
| UNSPSC 6.01 | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11 | 39121432 |
| UNSPSC 12.01 | 39121432 |
| UNSPSC 13.2 | 39121432 |
| UNSPSC 18.0 | 39121432 |
| UNSPSC 19.0 | 39121432 |
| UNSPSC 20.0 | 39121432 |
| UNSPSC 21.0 | 39121432 |

## Approvals

### Approvals

Approvals

CSA / SEV / EAC / cULus Recognized / IECEE CB Scheme

Ex Approvals

### Approval details

| | | | |
|---|---|---|---|
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 13631 |

| | B | D |
|---|---|---|
| Nominal voltage UN | 150 V | 300 V |
| Nominal current IN | 10 A | 10 A |
| mm²/AWG/kcmil | 28-14 | 28-14 |

# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

## Approvals

| | | | |
|---|---|---|---|
| SEV | | https://www.eurofins.ch/de/ | IK-4486-A1 |

| | |
|---|---|
| Nominal voltage UN | 250 V |
| Nominal current IN | 13.5 A |
| mm²/AWG/kcmil | 1.5 |

| | | |
|---|---|---|
| EAC | | B.01687 |

| | | | |
|---|---|---|---|
| cULus Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E60425-19770427 |

| | B | D |
|---|---|---|
| Nominal voltage UN | 300 V | 300 V |
| Nominal current IN | 10 A | 10 A |
| mm²/AWG/kcmil | 30-14 | 30-14 |

| | | | |
|---|---|---|---|
| IECEE CB Scheme | | http://www.iecee.org/ | CH-10724-A1 |

| | |
|---|---|
| Nominal voltage UN | 250 V |
| Nominal current IN | 13.5 A |
| mm²/AWG/kcmil | 1.5 |

## Accessories

### Accessories

### Bridge

Insertion bridge - EBP 2- 5 - 1733169



Insertion bridge for connectors with 5.0 mm or 5.08 mm pitch

# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

## Accessories

Insertion bridge - EBP 3- 5 - 1733172



Insertion bridge for connectors with 5.0 mm or 5.08 mm pitch

Insertion bridge - EBP 5- 5 - 1733198



Insertion bridge for connectors with 5.0 mm or 5.08 mm pitch

### Labeled terminal marker

Marker card - SK 5,08/3,8:FORTL.ZAHLEN - 0804293



Marker card, Card, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 5.08 mm, lettering field size: 5.08 x 3.8 mm

### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

### Screwdriver tools

# PCB terminal block - MKKDSN 1,5/ 5-5,08 - 1726176

## Accessories

Screwdriver - SZS 0,6X3,5 - 1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

## Terminal marking

Marker card - SK 5,08/3,8:UNBEDRUCKT - 0805412



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: adhesive, for terminal block width: 5.08 mm, lettering field size: 5.08 x 3.8 mm

Phoenix Contact 2021 © - all rights reserved
http://www.phoenixcontact.com