

ONLINE DATA SHEET
www.mysick.com

Absolute encoders
ARS60 SSI/Parallel, Rotary

ARS60-GAA02880



SICK
Sensor Intelligence.

SICK
Sensor Intelligence.

Absolute encoders
ARS60 SSI/Parallel, Rotary

Model Name > ARS60-GAA02880
Part No. > 1212195





Illustration may differ

At a glance

- Absolute singleturn encoder
- Resolution: up to 15 bits (32,768 increments)
- Electrical interface: SSI with gray code type or gray capped
- Electrical interface: Parallel with gray, gray capped, binary, BCD code type
- Zero-set function
- Mechanical interfaces: face mount flange, servo flange, blind and through hollow shaft
- Enclosure rating: Up to IP66

Your benefits

- Optical and magnetic variants for the widest range of requirements
- Reduced maintenance costs thanks to magnetic, wearless scanning in single and multiturn design
- High level of productivity due to optical encoders with a high level of precision and fast calculation of positions
- Robust design for maximum system availability, even in extreme environmental conditions
- Absolutely compact - specially suited in cases where installation space is tight
- Flexible integration in all common networks

Performance

Max. number of steps per revolution:	2,880
Max. number of revolutions:	1
Resolution power:	2,880 x 1
Resolution:	11.49 bit
Error limits:	0.035 ° (binary number of steps) 0.046 ° (non-binary number of steps)
Repeatability (Ta not constant):	0.005 °
Measuring step deviation:	0.005 °, 0.016 °
Measuring step:	360 ° /number of lines
Initialization time:	80 ms [1)]

[1)] Valid positional data can be read once this time has elapsed

Mechanical data

Mechanical interface:	Blind hollow shaft

© SICK AG. Subject to change without notice.

Shaft diameter:	6 mm 8 mm 10 mm 12 mm 14 mm 15 mm 1/4 " 3/8 " [1)] 1/2 "
Mass:	0.3 kg
Start up torque:	0.6 Ncm
Operating torque:	0.4 Ncm
Maximum operating speed:	3,000 /min
Bearing lifetime:	3.6 x 10^9 revolutions
Max. angular acceleration:	500,000 rad/s²
Permissible movement axial static/dynamic:	± 0.5 mm, ± 0.2 mm
Permissible movement radial static/dynamic:	± 0.3 mm, ± 0.1 mm
Operation of zero-set:	≥ 100 ms [2)]

[1)] Collets for 6, 8, 10, 12, 14 mm and 1/4 ", 3/8 " and 1/2 " as accessories, separate order item. For 15 mm shaft diameter collet is not needed. [2)] Only with shaft stationary (note initialisation time)

Electrical data

Operating voltage range:	10 V DC ... 32 V DC
Operating power consumption (no load):	90 mA
MTTFd: mean time to dangerous failure:	300 a (EN ISO 13849-1) [1)]

[1)] This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

Interfaces

Electrical interface:	Connector M23, 21-pin, radial


Ambient data

EMC:	(according to EN 61000-6-2 and EN 61000-6-3) [1)]
Enclosure rating:	IP 65 (according to IEC 60529), with mating connector fitted
Permissible relative humidity:	90 % (condensation of the optical scanning not permitted)
Working temperature range:	-20 °C ... 85 °C
Storage temperature range:	-40 °C ... 100 °C
Resistance to shocks:	50 g (according to EN 60068-2-27)
Resistance to vibration:	20 g, 10 Hz ... 2,000 Hz (according to EN 60068-2-6)

[1)]

© SICK AG. Subject to change without notice.

Dimensional drawing

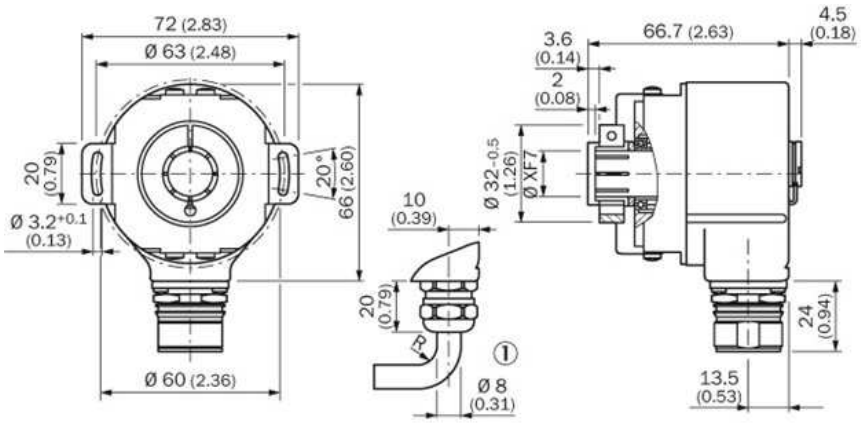

PIN assignment

- Allocation for encoder with 21-pin connector Single; Parallel Interface

PIN	Wire color by cable outlet	Binary	Gray	BCD	Description
1	Lilac	2^0	G_0	$2^0 \times 10^0$	Data lines, outputs
2	White/brown	2^1	G_1	$2^1 \times 10^0$	
3	White/green	2^2	G_2	$2^2 \times 10^0$	
4	White/yellow	2^3	G_3	$2^3 \times 10^0$	
5	White/gray	2^4	G_4	$2^0 \times 10^1$	
6	White/pink	2^5	G_5	$2^1 \times 10^1$	
7	White/blue	2^6	G_6	$2^2 \times 10^1$	
8	White/red	2^7	G_7	$2^3 \times 10^1$	
9	White/black	2^8	G_8	$2^0 \times 10^2$	
10	Brown/green	2^9	G_9	$2^1 \times 10^2$	
11	Brown/yellow	2^{10}	G_{10}	$2^2 \times 10^2$	
12	Brown/gray	2^{11}	G_{11}	$2^3 \times 10^2$	
13	Brown/pink	2^{12}	G_{12}	$2^0 \times 10^3$	
14	Brown/blue	2^{13}	G_{13}	$2^1 \times 10^3$	
15	Brown/red	2^{14}	G_{14}	$2^2 \times 10^3$	
16	Green	Parity	Parity	Parity	
17	Pink	Store_	Store_	Store_	
18	Yellow	Enable_	Enable_	Enable_	
19	Brown	V/R_	V/R_	V/R_	
1)	Gray	SET	SET	SET	
20	Blue	GND	GND	GND	
21	Red	U_V	U_V	U_V	
Housing		Screen	Screen	Screen	

1) Set line only possible with a cable outlet.

U_V Supply voltage to the encoder (before commissioning, note must be taken of the type label of the encoder).

GND Zero volt connection to the encoder: electrically isolated from the housing. The voltage referred to GND is U_V.


V/R_ Forward/reverse: this input programs the counting direction of the encoder. If not connected, this input is <high>. If the encoder shaft, as viewed on the drive shaft, rotates in the clockwise direction, it counts in an increasing sequence. If it should count upwards when the shaft rotates in the anti-clockwise direction, this connection must be connected permanently to <low> level (zero volts).

Enable_ This input activates the data output drives when a <low> level is applied. If not connected, this input is <low>. In the case of a <high> level, the outputs are in the tristate mode.

Store_ This input stores the encoder data in Gray code when a <low> level is applied. This avoids a read error if the output data is requested in binary code. If the input is <low>, the data at the encoder output is stable, irrespective of whether the input shaft rotates. If not switched, this input is <high>.

Parity This output supplies a <high> level when the binary checksum of the data bits is even.


SET This input serves to set the zero electronically. If the SET line is connected to Us for more than 100 ms, the mechanical position corresponds to the value 0.



View of the connector M23 fitted to the encoder body Single, Parallel

© SICK AG. Subject to change without notice.

Drehzahlbetrachtung

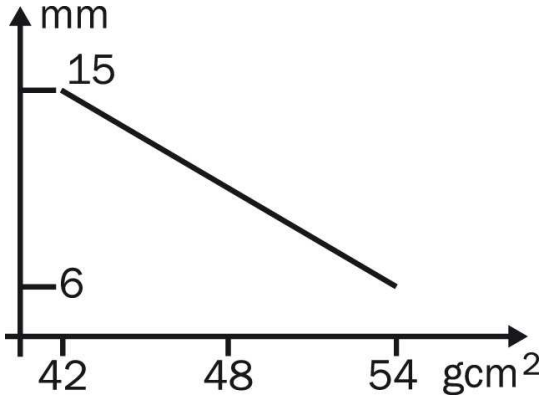

© SICK AG. Subject to change without notice.

A4 4c int43

Australia
Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg
Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil
Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada
Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika
Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China
Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark
Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland
Phone +49 211 5301-301
E-Mail info@sick.de

España
Phone +34 93 480 31 00
E-Mail info@sick.es

France
Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain
Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India
Phone +91–22–4033 8333
E-Mail info@sick-india.com

Israel
Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia
Phone +39 02 27 43 41
E-Mail info@sick.it

Japan
Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország
Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland
Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge
Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich
Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska
Phone +48 22 837 40 50
E-Mail info@sick.pl

România
Phone +40 356 171 120
E-Mail office@sick.ro

Russia
Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz
Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore
Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija
Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa
Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea
Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi
Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige
Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan
Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye
Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates
Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México
Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at **www.sick.com**

SICK
Sensor Intelligence.