SIEMENS

Data sheet 3RV1021-1JA15



Figure similar

Circuit breaker size S0 for motor protection CLASS 10 A-release 7...10 A Short-circuit release 130 A Screw terminal Standard switching capacity with transverse auxiliary switch 1 NO+1 NC !!! Phased-out product !!! Successor is SIRIUS 3RV2 Preferred successor type is >>3RV2011-1JA15<<

product brand name	SIRIUS
product designation	circuit breaker
design of the product	for motor protection
General technical data	
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
● at AC in hot operating state	9.25 W
● at AC in hot operating state per pole	3.1 W
surge voltage resistance rated value	6 000 V
protection class IP on the front	IP20
shock resistance	25g / 11 ms
mechanical service life (switching cycles) of the main contacts typical	100 000
continuous current rated value	10 A
Substance Prohibitance (Date)	05/01/2012
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
● during operation	-20 ... +60 °C
● during storage	-50 ... +80 °C
● during transport	-50 ... +80 °C
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	7 ... 10 A
operating voltage	
● rated value	690 V
● at AC-3 rated value maximum	690 V
operational current at AC-3 at 400 V rated value	10 A
operating power at AC-3	
● at 400 V rated value	4 kW
operating frequency at AC-3 maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	transverse
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
● at 24 V	2 A
● at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	

Subject to change without notice
© Copyright Siemens

● at 24 V	1 A
● at 60 V	0.15 A
Protective and monitoring functions	
product function	
● ground fault detection	No
● phase failure detection	Yes
trip class	CLASS 10
breaking capacity maximum short-circuit current (Icu)	
● at AC at 240 V rated value	100 kA
● at AC at 400 V rated value	100 kA
● at AC at 500 V rated value	42 kA
● at AC at 690 V rated value	6 kA
Short-circuit protection	
design of the overcurrent release and short-circuit release	thermomagnetic
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
height	97 mm
width	45 mm
depth	96 mm
required spacing with side-by-side mounting	
● backwards	0 mm
● at the side	0 mm
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	No
type of electrical connection	
● for main current circuit	screw-type terminals
● for auxiliary and control circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	front side
type of connectable conductor cross-sections	
● for main contacts	
— solid	2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²)
— stranded	2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²)
— finely stranded with core end processing	2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²)
● at AWG cables for main contacts	2x (14 ... 10)
type of connectable conductor cross-sections	
● for auxiliary contacts	
— solid	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
● at AWG cables for auxiliary contacts	2x (18 ... 14)
Safety related data	
touch protection against electrical shock	finger-safe
Certificates/ approvals	

General Product Approval					For use in hazardous locations
CSA	CCC	Confirmation	UL	EAC	ATEX

For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping

Subject to change without notice
© Copyright Siemens

IECEx

EG-Konf.

UK CA

Type Test Certificates/Test Report


Special Test Certificate

ABS


Marine / Shipping	other			Railway
LRS RINA	Confirmation	Miscellaneous	VDE	Special Test Certificate

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1021-1JA15
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1021-1JA15
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RV1021-1JA15
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1021-1JA15&lang=en
Characteristic: Tripping characteristics, I²t, Let-through current
https://support.industry.siemens.com/cs/ww/en/ps/3RV1021-1JA15/char
Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV1021-1JA15&objecttype=14&gridview=view1

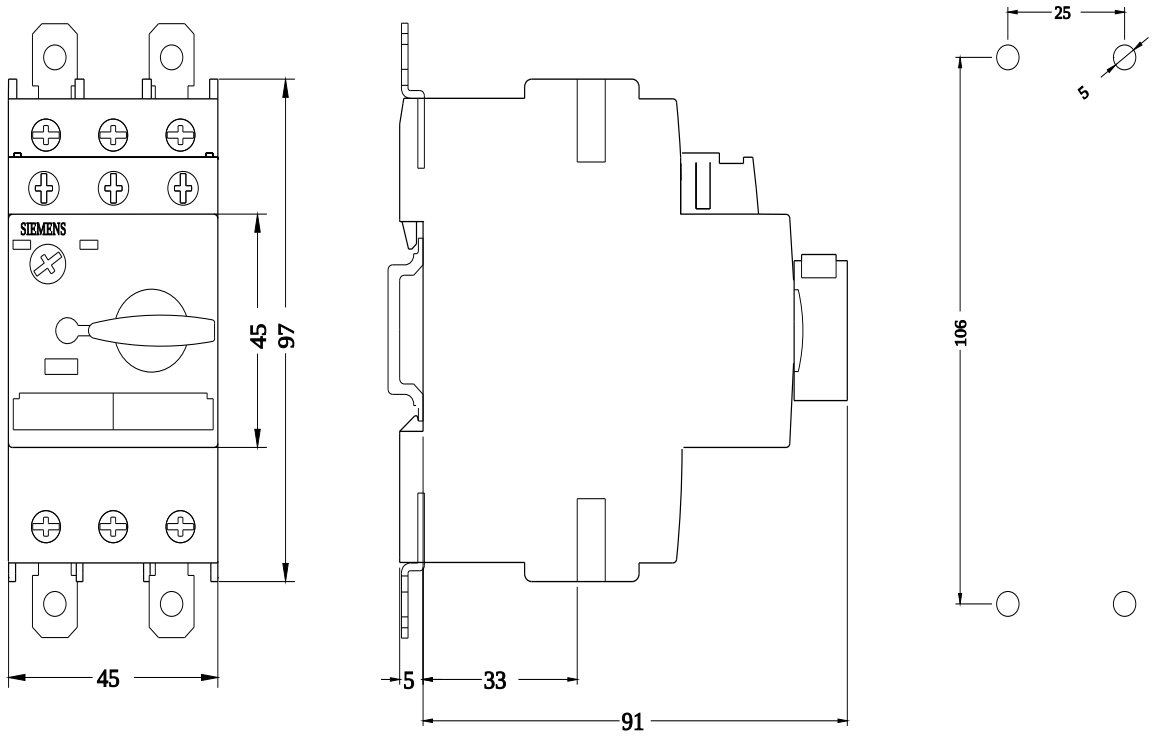

Subject to change without notice
© Copyright Siemens

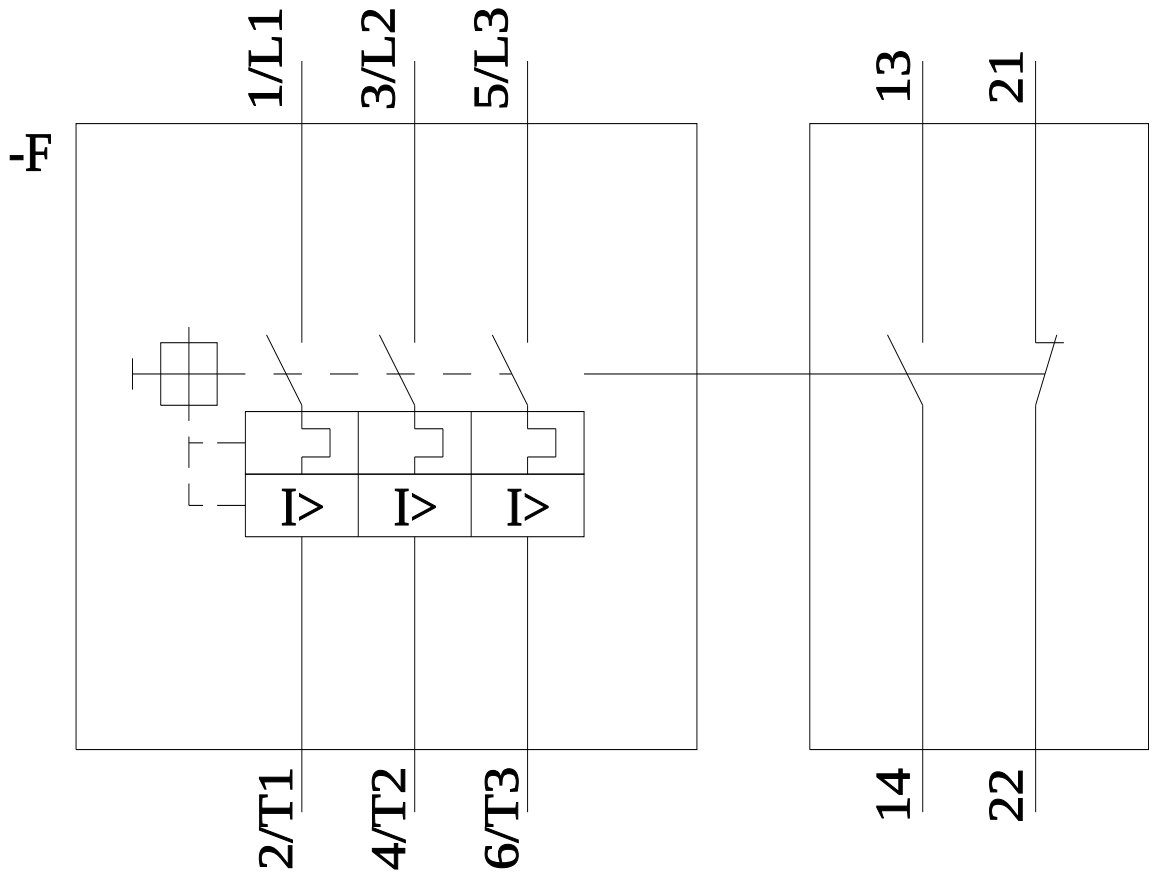

last modified: 12/23/2020

© Copyright Siemens